



A M A T A L A M P



AMATA

COMPANY INTRODUCTION

Amata Lamp specializes in imported and design-focused lighting with strict quality control across every production batch. We ensure consistent colors, reliable assembly, and stable model continuity for professional use.

With a well-managed inventory and fast delivery, we support retailers, interior designers, contractors, and project developers in completing their projects smoothly and on schedule. We also offer customized lighting solutions, including special colors, sizes, and made-to-order designs for project needs.

Our goal is to provide dependable lighting products with a professional service process from QC to logistics—so every project is delivered with confidence and consistency.


COLOR RENDERING

We use world-class LED chips with a high color rendering index of Ra>90, allowing illuminated objects to appear more natural, vivid, and true to life. High-CRI lighting enhances both color accuracy and material texture, delivering a more realistic visual experience for products and people. It is an ideal lighting solution for boutiques, showrooms, and premium social spaces.




Ra Consistency

BENHAO knows well the requirement for high Ra consistency for the quality lighting and also faces the phenomenon of inconsistency in terms of Ra in market. It is a headache of designers and the consumers. For this purpose, VS applies the LED chips at high consistency from the quality chips manufacturers. All LED chips are sorted out, stored and processed in strict and scientific criterion to guarantee the LED chip in consistency in one batch.

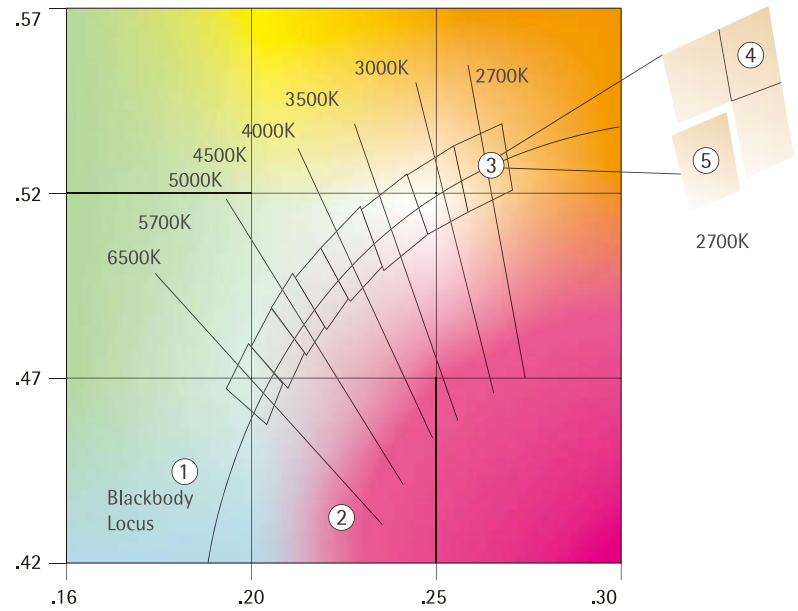


Average Ra Evaluation Index.

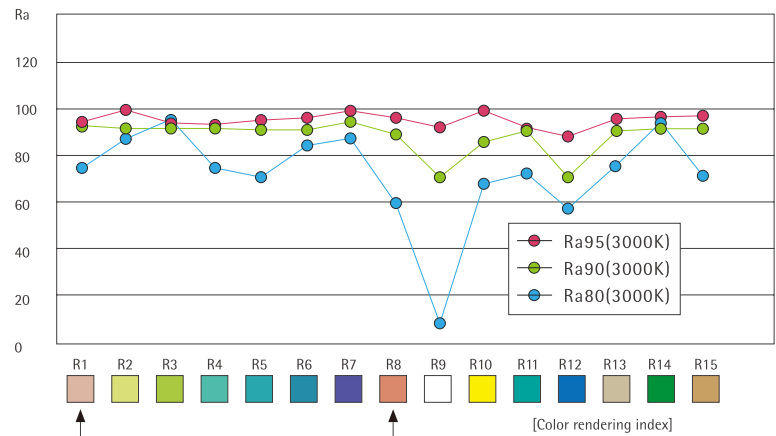

(Ra): average Ra index:
Average Ra index is the average value from R1 to R8.

Special color rendering: Red (R9), yellow (R10), green (R11), blue (R12), The color of the white man (R13), olive green (R14), The color of the Asians (R15). Ra is to evaluate the reduction level of object color projected from the light of lighting fixtures and natural light.

LED closest to the natural spectrum

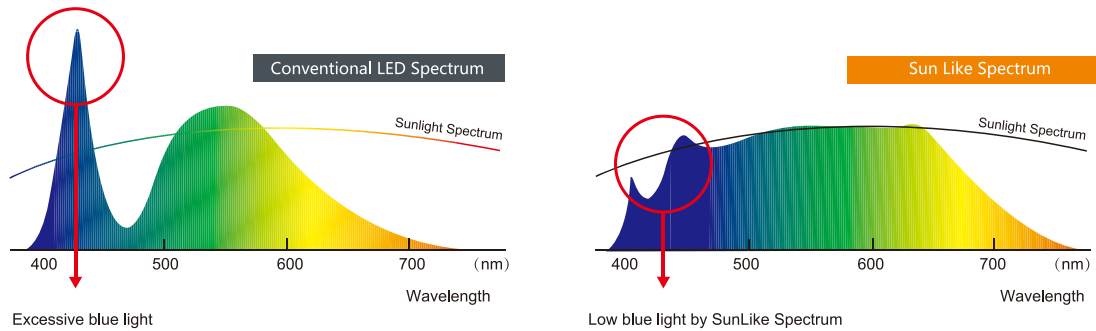

BETTER EYE

SunLike is beneficial to prevent myopia in children in the growth and development stages, while reducing eye discomfort.

Natural spectrum protects the eyes

BETTER STUDY

SunLike improves daytime alertness and learning effects.

Test accuracy is increased by 5%, learning and cognitive speed is increased by 3.2 times.

Sourced by Harvard University Medical School

BETTER SLEEP

Sleeping time is reduced by 23%

Sleep quality is improved by 1.3 times

University of Basel

NATURAL COLOR

SunLike Natural Spectrum LEDs are evaluated as the closest to natural light and the highest light quality LEDs are certified as diamond-grade light sources with color reduction grade.

(The highest level of UL color fidelity level)


Oblique

Elliptical hole

Direct

$Ra \geq 90^\circ$

Material: Die cast aluminum



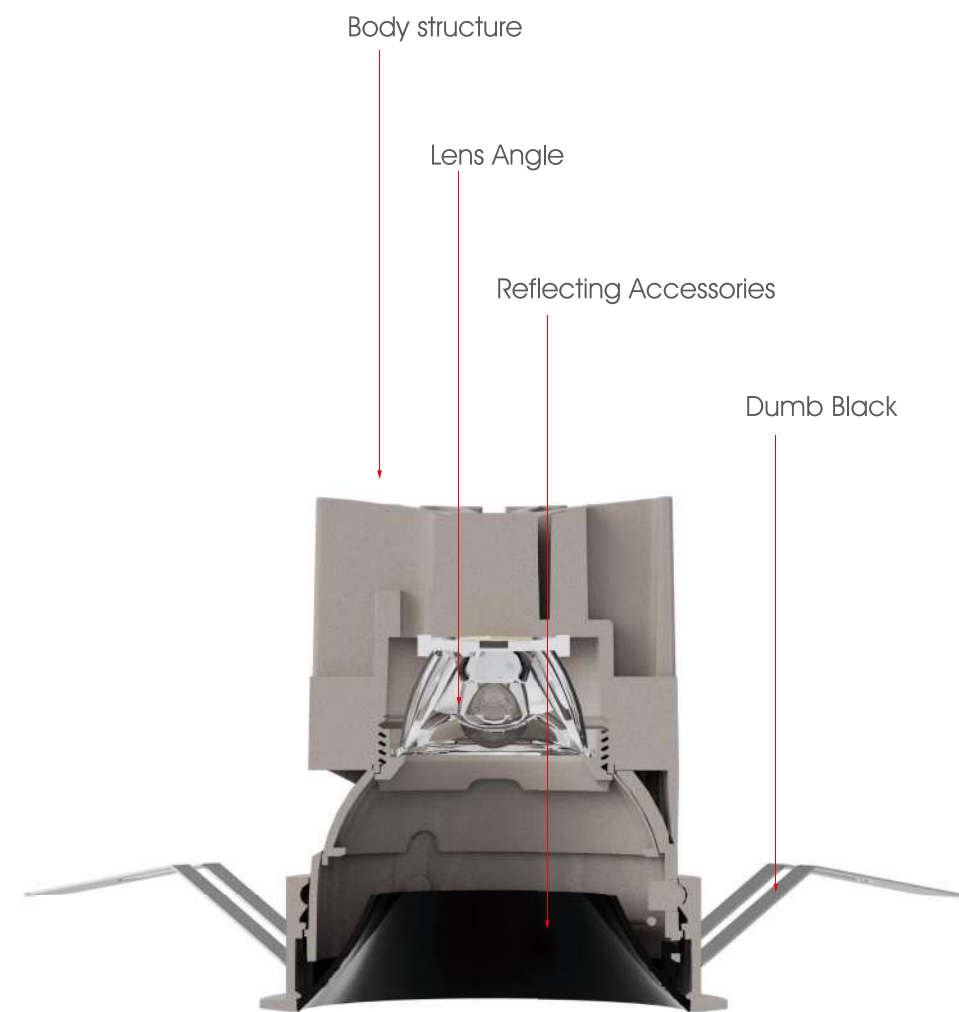


SUPER SOFT LIGHT SPOTLIGHT OUTPUT RATE 83%



24°
Beam Angle
3000K


SPECTRAL DIAGRAM

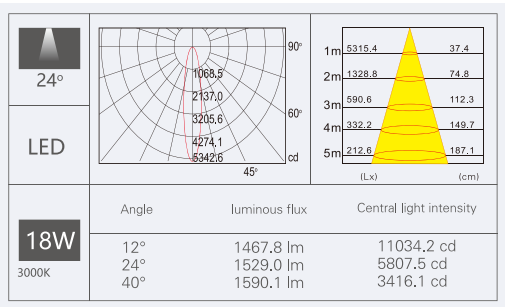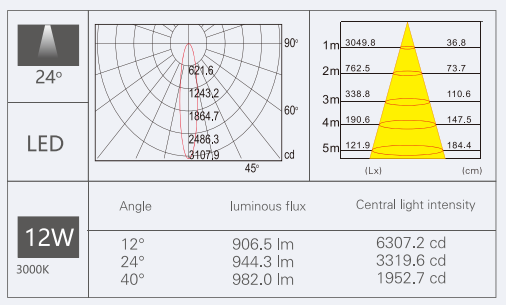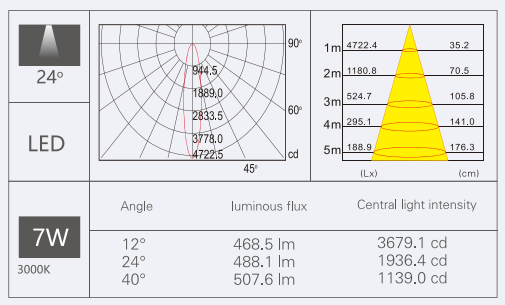

DOWN LIGHT SERIES
BUCK N99 SERIES

NO: BUCK N99 SERIES

Beam angle





Chip: COB | Ra≥90+ | Die cast aluminum

Product Parameter


Model	Voltage	Power	Size(mm)	Cut out(mm)
N99-55	220V	<12W	Φ62xH88	Φ55
N99-55-N	220V	<12W	Φ82xH88	Φ55
N99-55-2	220V	<12W	131x67xH93	125x61
N99-55-2-N (Square cover without edge)	220V	<12W	105x83xH88	110x56

Color temperature

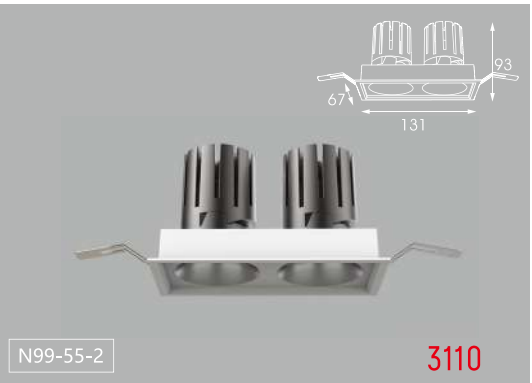


DOWN LIGHT SERIES
BUCK N99 SERIES

UNIT:mm

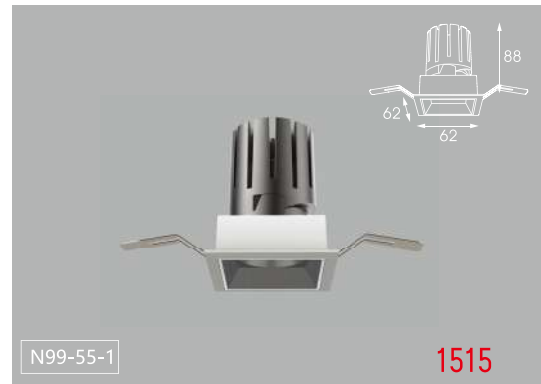

NO: BUCK N99-55 SERIES

Beam angle






Chip: COB | Ra≥90+ | Die cast aluminum

Product Parameter

Model	Voltage	Power	Size(mm)	Cut out(mm)
N99-55-1	220V	<12W	62x62xH88	55x55
N99-55-1-N	220V	<12W	78x78xH88	55x55
N99-55-3	220V	<12W	193x67xH93	187x61
N99-55-2-N (Round cover without edge)	220V	<12W	119x92xH93	125x59

Color temperature

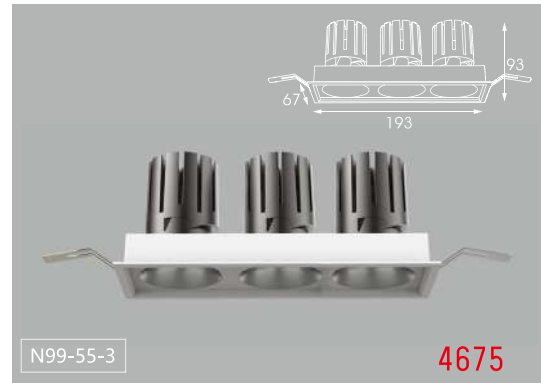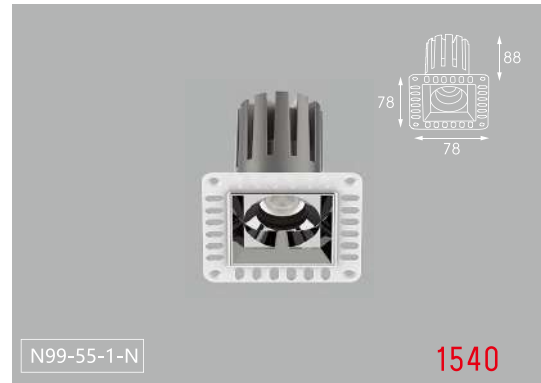


DOWN LIGHT SERIES
BUCK N99 SERIES

UNIT:mm



NO: BUCK N99-65 SERIES

Beam angle




Chip: COB | Ra≥90+ | Die cast aluminum

Product Parameter

Model	Voltage	Power	Size(mm)	Cut out(mm)
N99-65	220V	<12W	Φ72xH88	Φ65
N99-65-N	220V	<12W	Φ92xH88	Φ65
N99-65-2	220V	<12W	159x79xH93	155x70

Color temperature



CEILING LIGHT

X777·WALL-WASHING CEILING LIGHTS

X777 series is designed to emphasize lighting. Its unique product structure can tilt and rotate, and can adjust the illumination height of lamps. High quality optical accessories are selected to make lamps project clear, clean and spot free light, creating a more dramatic lighting effect.


15°/24°/36°/50°

Φ35~102mm


CEILING LIGHT

X777 · WALL-WASHING CEILING LIGHTS

UNIT:mm

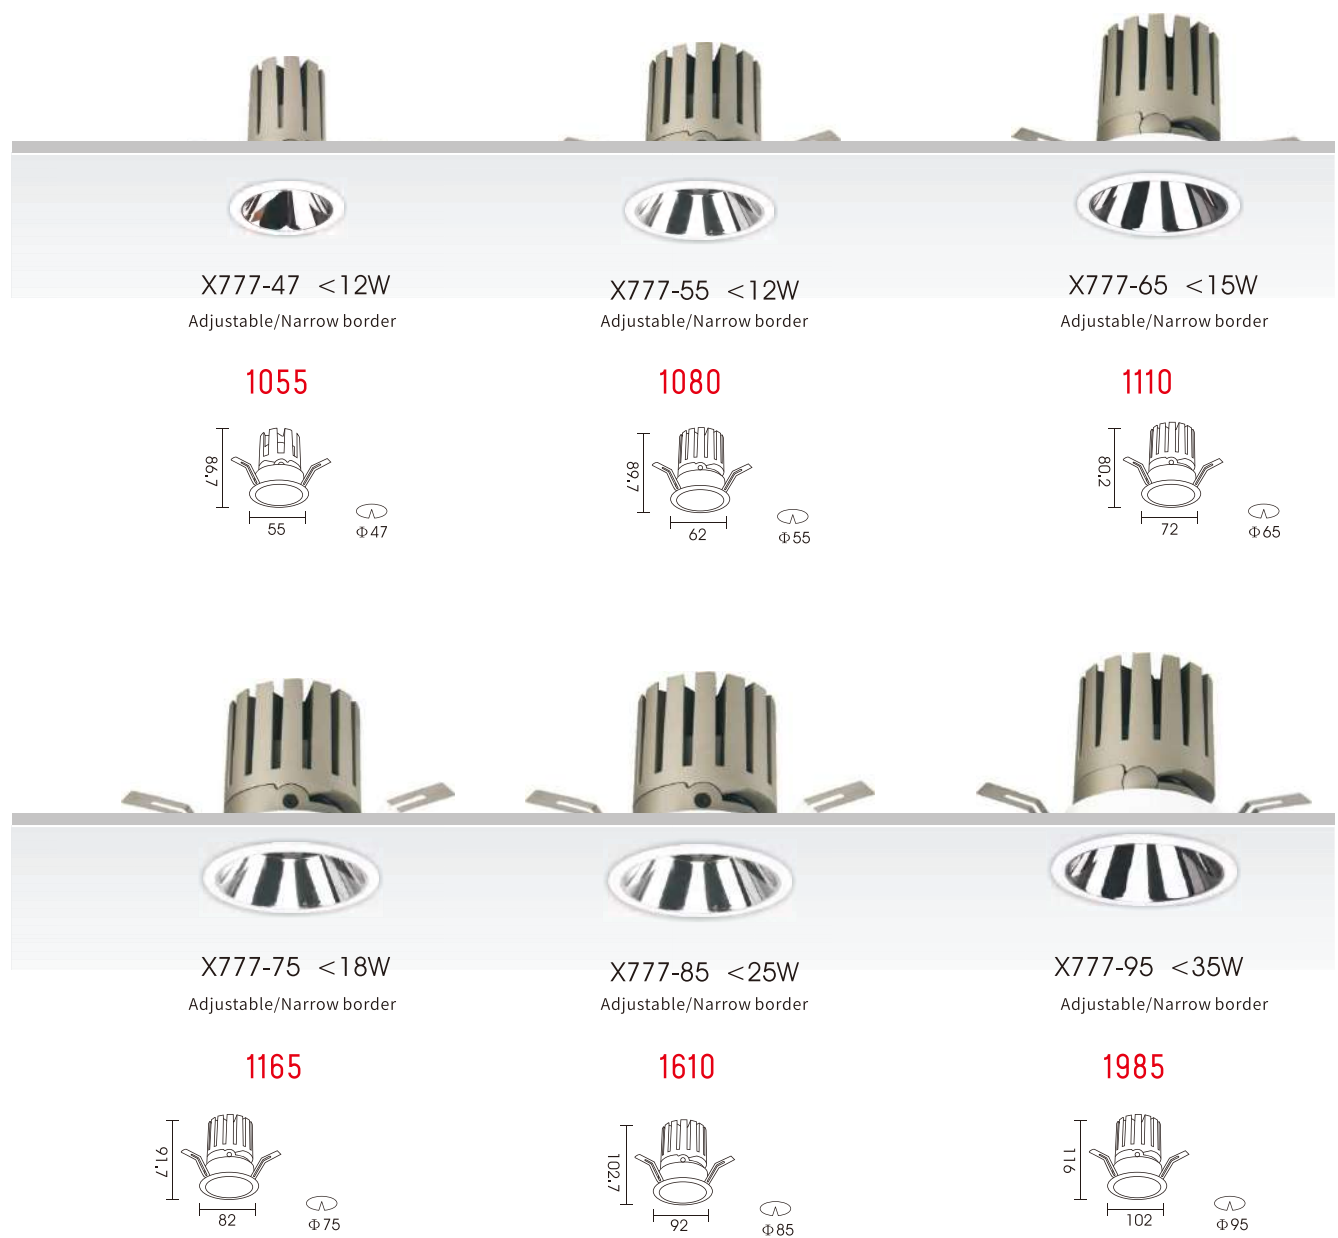

Reflector color



CEILING LIGHT

X777 BORDERLESS · WASHING WALL CEILING LIGHT



Color
Matte white + gray

Beam angle



Input voltage
AC220V


Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium

CCT



Product Parameter


Model	Power	Dimension	Hole size
X777-55 (Borderless)	12W	Φ 82*89.7mm	Φ 55mm
X777-65 (Borderless)	12W	Φ 92*80.2mm	Φ 65mm
X777-75 (Borderless)	12W	Φ 100*91.7mm	Φ 75mm
X777-85 (Borderless)	18W	Φ 113*102.7mm	Φ 85mm
X777-95 (Borderless)	30W	Φ 125*116.2mm	Φ 95mm

Light distributions





Reflector color




CEILING LIGHT

X777-1 · WALL-WASHING CEILING LIGHTS



Color
Matte white + gray

Beam angle



Input voltage
AC220V


Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium


CCT



Product Parameter

Model	Power	Dimension	Hole size
X777-1-55	7W	62*72.7mm	55*55mm
X777-1-55	12W	62*90mm	55*55mm
X777-1-65	12W	72*80mm	65*65mm
X777-1-75	12W	82*92mm	75*75mm
X777-1-85	18W	92*103mm	85*85mm
X777-1-95	30W	102*116.2mm	95*95mm


Light distributions






X777-1-55 <7W
Adjustable/Narrow border

1255

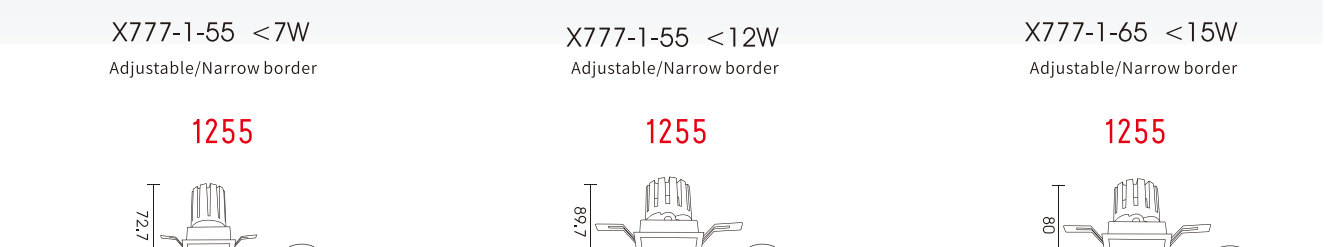

X777-1-55 <12W
Adjustable/Narrow border

1255

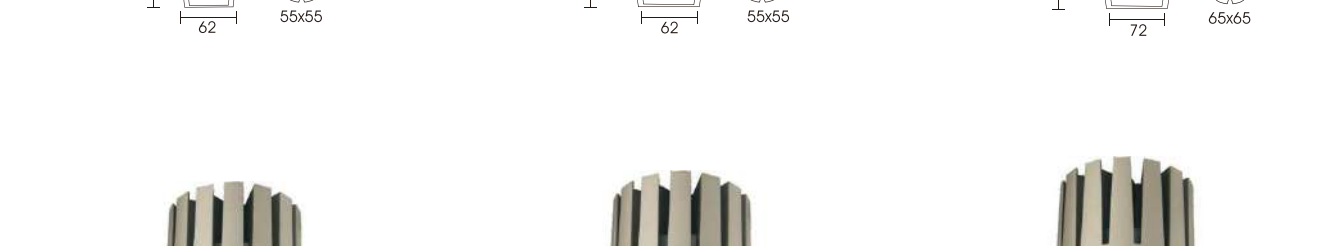


X777-1-65 <15W
Adjustable/Narrow border

1255



X777-1-75 <18W
Adjustable/Narrow border

1310

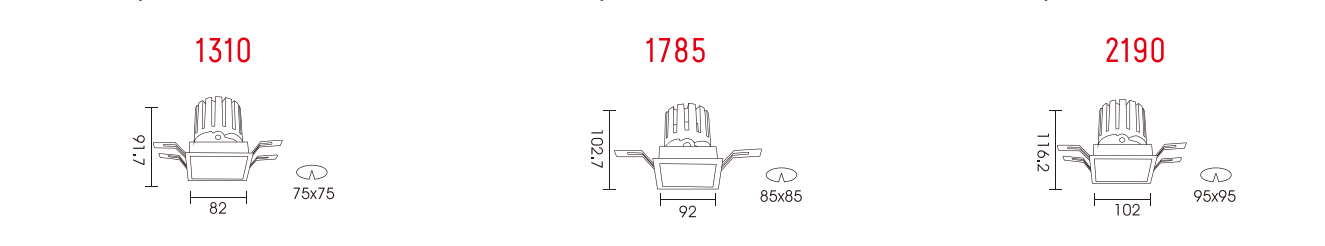

X777-1-85 <25W
Adjustable/Narrow border


1785



X777-1-95 <35W
Adjustable/Narrow border

2190

Reflector color



CEILING LIGHT

X777-1 BORDERLESS · WASHING WALL CEILING LIGHT



Color
Matte white + gray

Beam angle



Input voltage
AC220V


Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium


CCT



Product Parameter

Model	Power	Dimension	Hole size
X777-1-55 (Borderless)	7W	78*73mm	55*55mm
X777-1-65 (Borderless)	12W	87*80mm	65*65mm
X777-1-75 (Borderless)	12W	95*92mm	75*75mm
X777-1-85 (Borderless)	18W	107*103mm	85*85mm
X777-1-95 (Borderless)	30W	117*116.2mm	95*95mm

Light distributions




UNIT:mm



X777-1-55 <12W
Adjustable/Borderless

1285




73
78
55x55



X777-1-65 <15W
Adjustable/Borderless

1285




88
87
65x65



X777-1-75 <18W
Adjustable/Borderless

1340




91.7
95
75x75



X777-1-85 <25W
Adjustable/Borderless

1840




102.7
107
85x85



X777-1-95 <35W
Adjustable/Borderless

2245



116.2
117
95x95

Reflector color















Dumb Black

Dumb White

Black

Chrome

Pearl Black

Dumb Silver


Rose Gold

CEILING LIGHT

X777 MULTI-HEAD (ROUND COVER) WALL WASHING CEILING LIGHT



Color
Matte white + gray




Input voltage
AC220V

Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium




Product Parameter


Model	Power	Dimension	Hole size
X777-2-55	2x7W	131*67*77mm	125*61mm
X777-3-55	3x7W	193*67*77mm	187*61mm
X777-2-75	2x12W	168*85*95mm	162*81mm
X777-3-75	3x12W	252*85*95mm	247*81mm
X777-2-95	2x30W	216*108*127mm	210*102mm
X777-3-95	3x30W	324*108*127mm	317*102mm

Light distributions



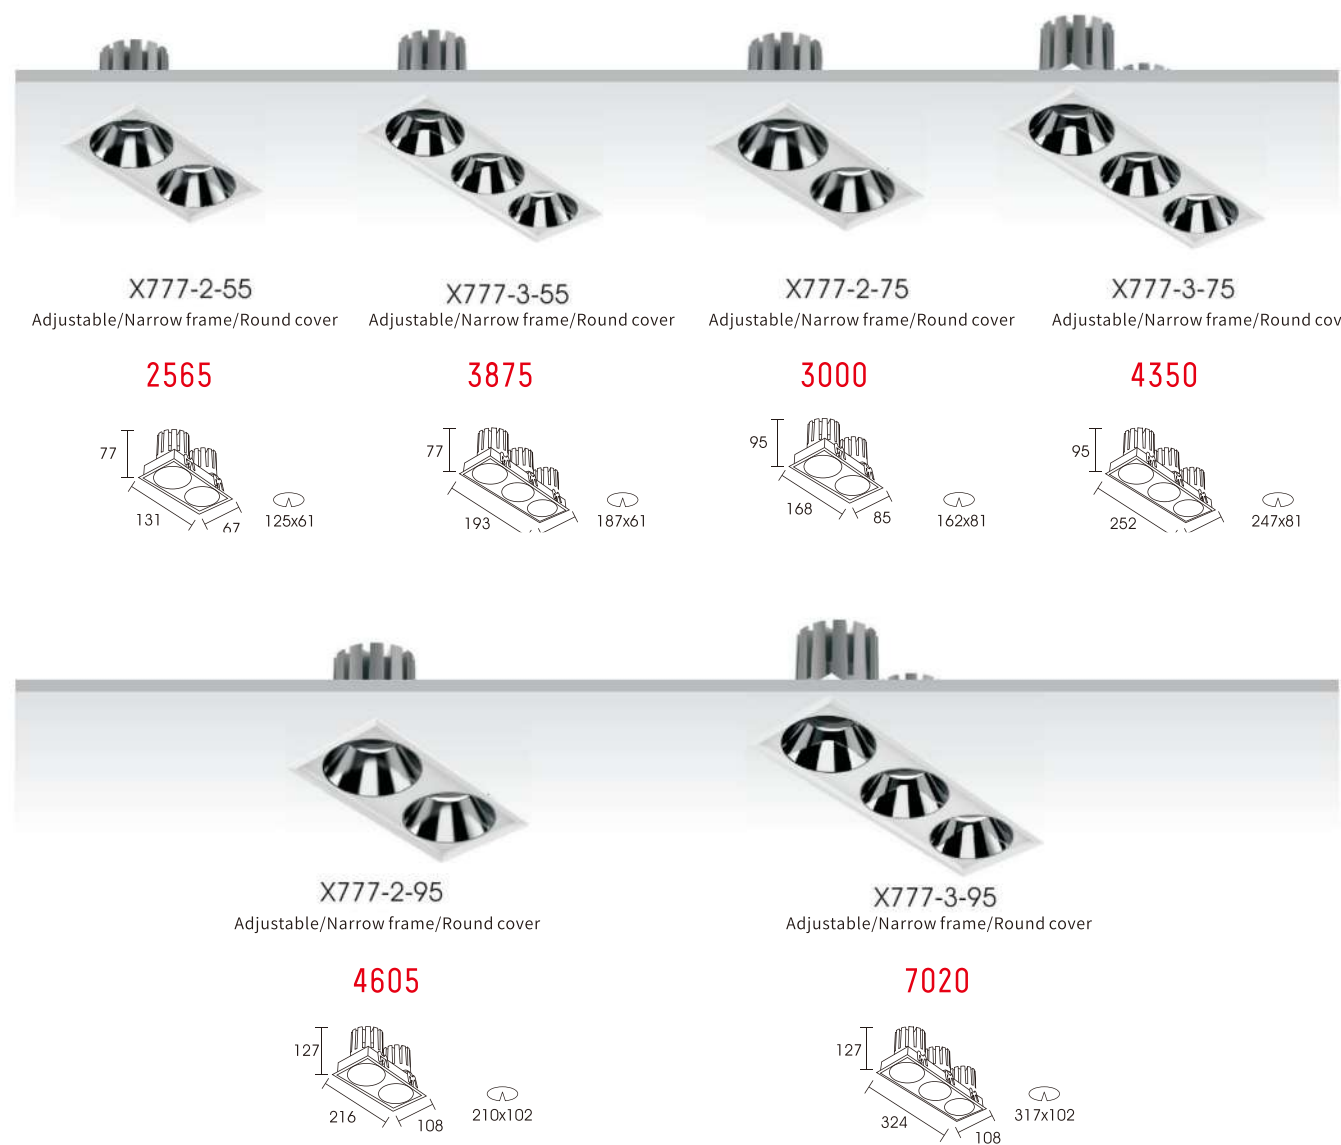


Reflector color




CEILING LIGHT

X777 MULTI-HEAD (SQUARE COVER) WALL WASHING CEILING LIGHT

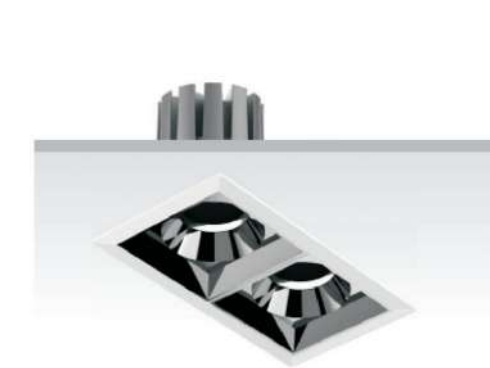

Color
Matte white + gray

Beam angle



Input voltage
AC220V


Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium


CCT





Product Parameter


Model	Power	Dimension	Hole size
X777-2-55	2x7W	120*67*73mm	110*56mm
X777-2-75	2x12W	153*85*91mm	145*77mm
X777-2-55 (Borderless)	2x7W	105*85*73mm	110*56mm
X777-2-75 (Borderless)	2x12W	139*107*95mm	145*77mm

Light distributions



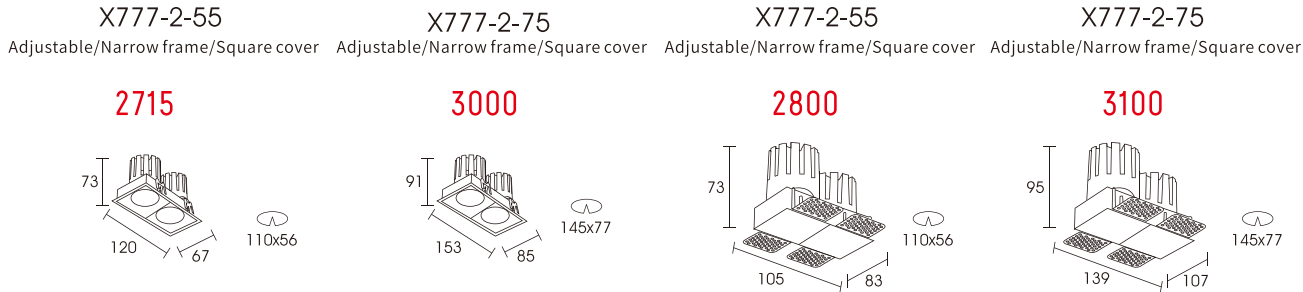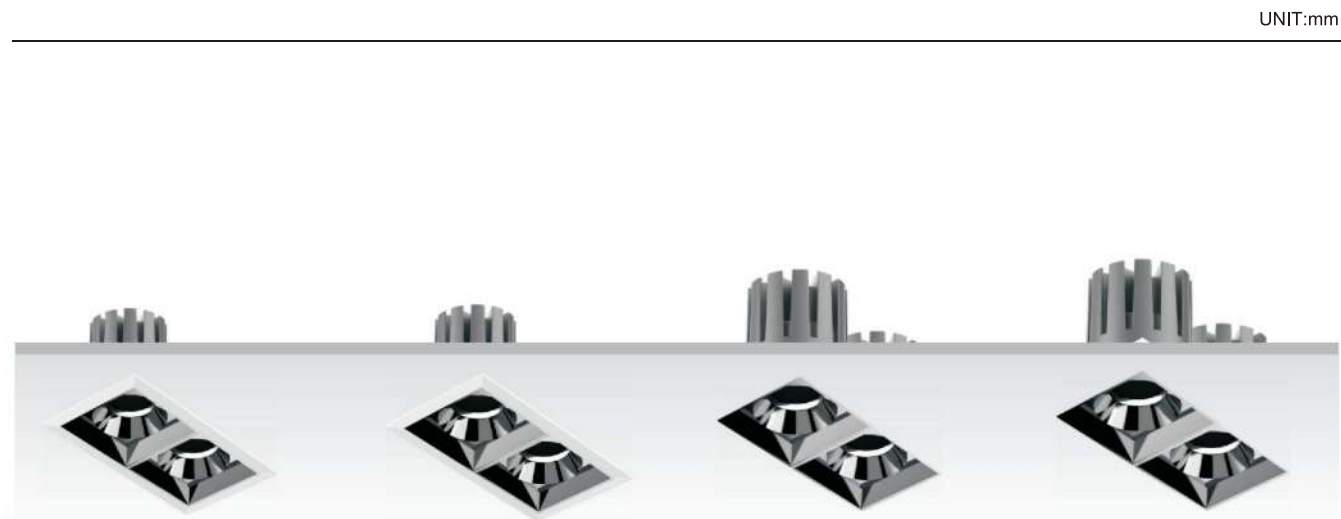


Reflector color




X777BN SERIES

Color
Matte white + gray

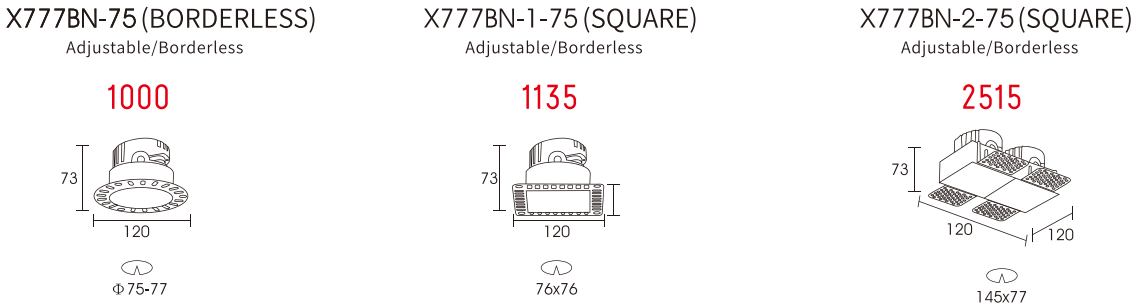

Beam angle



Input voltage
AC220V

Light source
LED COB


CRI
Ra>90

Material
Aluminium

Product Parameter

Model	Power	Dimension	Hole size
X777BN-75 (Borderless)	9W	Φ 100*53mm	Φ 75-77mm
X777BN-1-75 (Square borderless)	9W	95*95*53mm	76*76mm
X777BN-2-75 (Square borderless)	2x9W	139*107*53mm	145*77mm

CCT



Light distributions



CEILING LIGHT

X777BN · WALL-WASHING CEILING LIGHTS



Beam angle

15°

24°

36°

Input voltage

AC220V

Electrical connection

On/Off

Light source

LED COB

CRI

Ra>90

Material

Aluminium

Color

Matte white + gray

CCT

3000K

3500K

4000K

5000K

Product Parameter

Model	Power	Dimension	Hole size
X777BN	9W	Φ82*53mm	Φ75-77mm
X777BN-2 (Round cover)	2x9W	162*81mm	162*81mm
X777BN-3 (Round cover)	3x9W	247*81mm	247*81mm
X777BN-1 (Square cover)	9W	76*76mm	76*76mm
X777BN-2 (Square cover)	2x9W	145*77mm	145*77mm

Light distributions








... .. Supports multiple intelligent linking methods

UNIT:mm



X777BN
Adjustable/Narrow border


945





X777BN-2 (CIRCULAR)
Adjustable/Narrow border


2430





X777BN-3 (CIRCULAR)
Adjustable/Narrow border


3460





X777BN-1
Adjustable/Narrow border


1080





X777BN-2
Adjustable/Narrow border

2055



Reflector color















Dumb Black Dumb White Black Chrome Pearl Black Dumb Silver Rose Gold

CEILING LIGHT

D777BN · OPEN WALL WASHING DOWNLIGHT



Beam angle

15°

24°

36°

CCT

3000K

3500K

4000K

5000K

Input voltage

AC220V

Electrical connection

On/Off

Light source

LED COB

CRI

Ra>90

Material

Aluminium

Product Parameter


Model	Power	Dimension	Hole size
D777BN-COB	9W	Φ80*H95mm	/
D777BN-1-COB	9W	80*80*H95mm	/
D777BN-2-COB	2x9W	164*80*H95mm	/

Color


Black + White




D777BN-COB
Fixed/Surface-mounted



D777BN-1-COB
Fixed/Surface-mounted



D777BN-2-COB
Fixed/Surface-mounted



Light distributions



... Supports multiple intelligent linking methods



CEILING LIGHT

X88 FRAMELESS · WASHING WALL CEILING LIGHT



Beam angle

15°

24°

36°

50°

CCT

3000K

3500K

4000K

5000K

Input voltage

AC220V

Electrical connection

On/Off

Light source

LED COB

CRI

Ra>90

Material

Aluminium

Product Parameter


Model	Power	Dimension	Hole size
X88-55 (Borderless)	7W	Φ82*73/90mm	Φ55mm
X88-75 (Borderless)	18W	Φ92*73/92mm	Φ75mm
X88-95 (Borderless)	35W	Φ125*103/116mm	Φ95mm

Color


Matte white + gray




X88-55 <12W
Adjustable/Borderless



X88-75 <18W
Adjustable/Borderless



X88-95 <35W
Adjustable/Borderless



Light distributions



... Supports multiple intelligent linking methods



CEILING LIGHT

X777 / X778 · MINI WALL WASHING CEILING LIGHT



X777



X778-25

Color
Matte white + gray

Beam angle



15° 24° 36°

Input voltage
AC220V

Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium

CCT



3000K 3500K 4000K 5000K

Product Parameter

Model	Power	Dimension	Hole size
X777-35-T	3W / 5W	Φ38*62mm	Φ35mm
X777-35	3W / 5W	Φ38*69mm	Φ35mm
X777-35-TN	3W	Φ60*61mm	Φ47mm
X777-35-N	3W	Φ60*73mm	Φ47mm
X778-25	3W	Φ30*47mm	Φ25mm
X778-25-H	5W	Φ30*61mm	Φ25mm

Light distributions





... Supports multiple intelligent linking methods




28

UNIT:mm




X777-35-T <5W
Direct/Narrow border

705




X777-35 <5W
Direct/Narrow border

770




X777-35-TN <3W
Adjustable/Borderless

810



X777-35-N <3W
Adjustable/Borderless


880






X778-25 <3W
Direct/Narrow border

610



X778-25-H <5W
Direct/Narrow border

675



Reflector color



Dumb Black Dumb White Black Chrome Pearl Black Dumb Silver Rose Gold

29

CEILING LIGHT

X999 · WALL-WASHING CEILING LIGHTS



Color
Matte white + gray

Input voltage
AC220V

Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium

Beam angle


15° 24° 36° 50°

Product Parameter

Model	Power	Dimension	Hole size
X999-75	18W	Φ82*83.2mm	Φ75mm
X999-95	30W	Φ102*106mm	Φ95mm
X999-75 (Borderless)	18W	Φ100*83.2mm	Φ75mm
X999-95 (Borderless)	30W	Φ125*106mm	Φ95mm



UNIT:mm

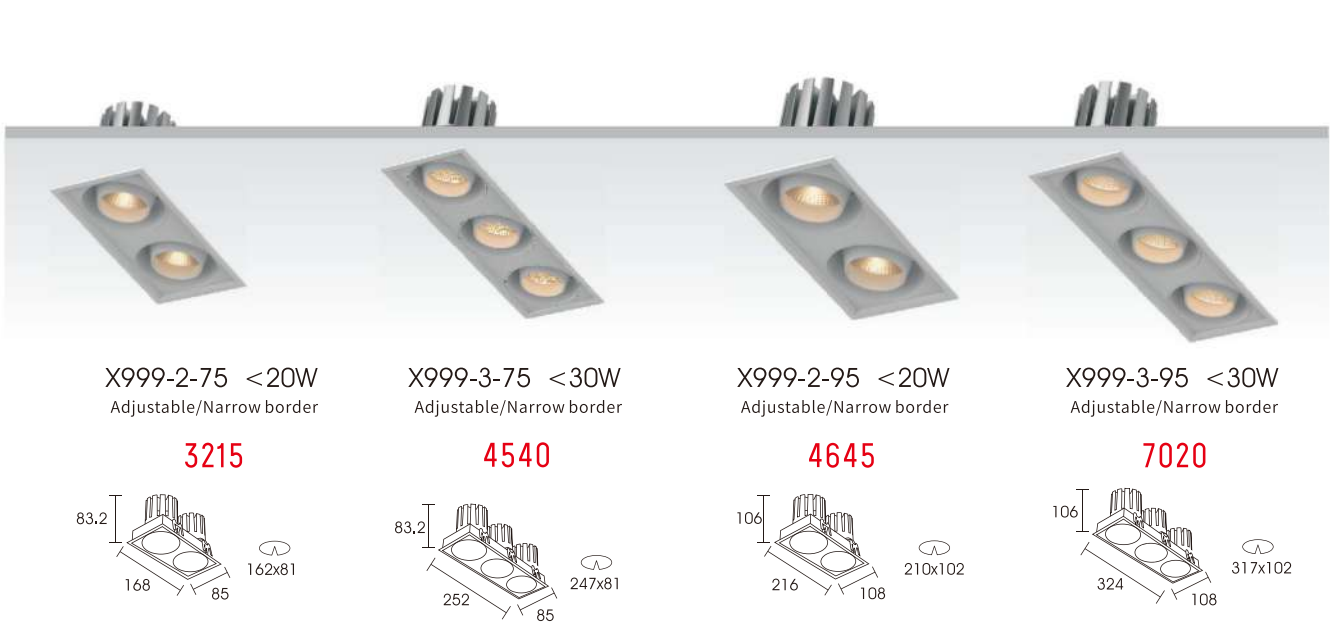

Color
Matte white + gray

Input voltage
AC220V

Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium

Beam angle

15° 24° 36° 50°

Product Parameter

Model	Power	Dimension	Hole size
X999-2-75	2x18W	168*85*83.2mm	162*81mm
X999-3-75	3x18W	252*85*83.2mm	247*81mm
X999-2-95	2x30W	216*108*106mm	210*102mm
X999-3-95	3x30W	324*108*106mm	317*102mm




CEILING LIGHT

X88 · WALL-WASHING CEILING LIGHTS



Color
Matte white + gray

Beam angle



Input voltage
AC220V


Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium

CCT



Product Parameter

Model	Power	Dimension	Hole size
X88-55	<12W	Φ65*73/90mm	Φ55mm
X88-75	<18W	Φ85*73/92mm	Φ75mm
X88-95	<30W	Φ105*103/116mm	Φ95mm
X88-1-55	<12W	65*65*73/90mm	55*55mm
X88-1-75	<18W	81*81*73/92mm	75*75mm
X88-1-95	<30W	103*103*103/116mm	95*95mm

Light distributions



... Supports multiple intelligent linking methods




UNIT:mm




X88-55 <12W
Adjustable/Narrow border

650




X88-75 <18W
Adjustable/Narrow border

880




X88-95 <35W
Adjustable/Narrow border

1690




X88-1-55 <12W
Adjustable/Narrow border

675




X88-1-75 <12W
Adjustable/Narrow border

905



X88-1-95 <35W
Adjustable/Narrow border

2000



Reflector color



Dumb Black

Dumb White

Black

Chrome

Pearl Black

Dumb Silver

Rose Gold


CEILING LIGHT

X88 (ROUND COVER) CEILING LIGHT



Color
Matte white + gray

Beam angle



Input voltage
AC220V


Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium

CCT



Product Parameter

Model	Power	Dimension	Hole size
X88-2-55 (Round cover)	2x12W	131*68*H73/90mm	125*59mm
X88-3-55 (Round cover)	3x12W	194*68*H73/90mm	187*61mm
X88-2-75 (Round cover)	2x18W	164*85*H73/92mm	162*81mm
X88-3-75 (Round cover)	3x18W	253*84*H73/92mm	247*81mm
X88-2-95 (Round cover)	2x35W	216*108*H103/116mm	210*102mm
X88-3-95 (Round cover)	3x35W	324*108*H103/116mm	317*102mm

Light distributions




UNIT:mm




X88-2-55 Adjustable/Narrow border/Round cover X88-3-55 Adjustable/Narrow border/Round cover X88-2-75 Adjustable/Narrow border/Round cover X88-2-75 Adjustable/Narrow border/Round cover


1390




2095



1865




2810




X88-2-95 Adjustable/Narrow border

4240



X88-2-95 Adjustable/Narrow border



6470



Reflector color



Dumb Black Dumb White Black Chrome Pearl Black Dumb Silver Rose Gold

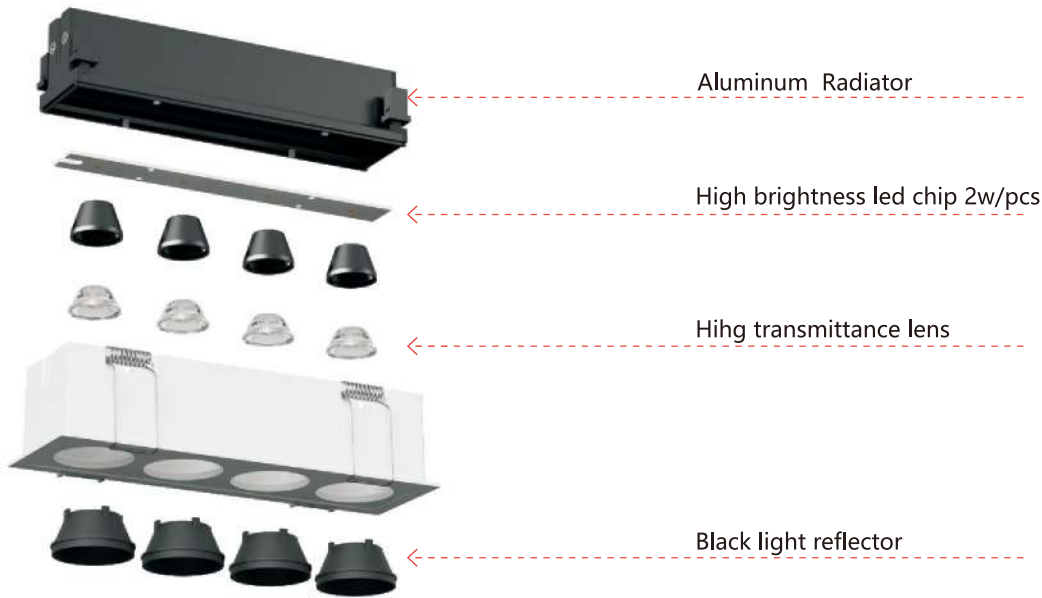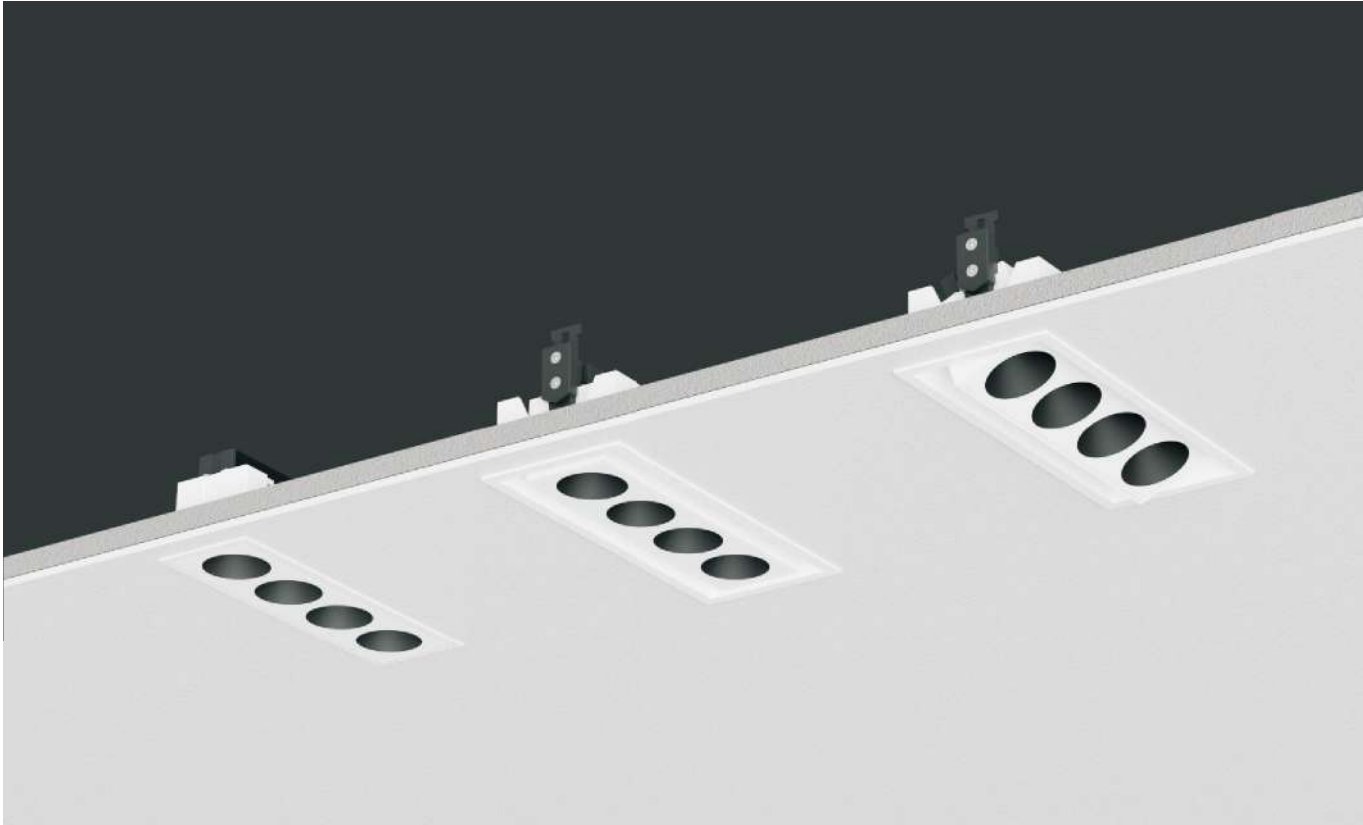

MASTERWORK
DESIGN

LINE Light

X779 WITH BORDERS · LINE LIGHTS


UNIT:mm

Color
Sha Bai




X779-X2
Fixed/Edged

1310




X779-X4
Fixed/Edged

2040




X779-X2L
Adjustable/Edged

1785



X779-X4L
Adjustable/Edged

2825



Input voltage
AC220V
Electrical connection
On/Off
Light source
LED COB
CRI
Ra>90
Material
Aluminium


Product Parameter

Model	Power	Dimension	Hole size
X779-X2	6W	95.5*54*54.2mm	90*50mm
X779-X4	11W	175*50*H54.2mm	175*50mm
X779-X2L	6W	112*79*H74.3mm	107*74mm
X779-X4L	11W	195*79*H74mm	188*75mm


Light distributions



Beam angle



CCT



LINE Light

X799 NO BORDER · LINE LIGHTS

UNIT:mm


Color
Sha Bai



X779-X2-N
Fixed/Borderless


1310

固定/无边




X779-X4-N
Fixed/Borderless

2040




X779-X2L-N
Adjustable/Borderless

1785



X779-X4L-N
Adjustable/Borderless

2825



Input voltage
AC220V

Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium


Product Parameter

Model	Power	Dimension	Hole size
X779-X2-N	6W	116.5*75*54.2mm	90*50mm
X779-X4-N	11W	199*75*H54.2mm	175*50mm
X779-X2L-N	6W	102*102*H74.3mm	105*78mm
X779-X4L-N	11W	185*102*H74mm	188*75mm

Light distributions



Beam angle



15°

24°

36°

CCT



3000K

3500K

4000K

5000K



CEILING LIGHT

X289SAN1 · CEILING LIGHTS



Beam angle

12°

24°

40°

CCT

3000K

3500K

4000K

5000K

Input voltage

AC220V

Electrical connection

On/Off

Light source

LED COB

CRI

Ra>90

Material

Aluminium

Product Parameter

Model	Power	Dimension	Hole size
X289SAN1	7W	Φ55*H111mm	Φ55mm
X289SAN1-2	2x7W	L124*W61*H111mm	117*52mm
X289SAN1-3	3x7W	L187*W61*H111mm	180*52mm

Color


Matte white



X289SAN1

Adjustable/Narrow border

1380




Φ55



X289SAN1-2

Adjustable/Narrow border

2460




117x52



X289SAN1-3

Adjustable/Narrow border

4105



180x52

Light distributions



... Supports multiple intelligent linking methods

IP20

F

CE

40

CEILING LIGHT

X289SA1 · CEILING LIGHTS



Beam angle

12°

24°

40°

CCT

3000K

3500K

4000K

5000K

Input voltage

AC220V

Electrical connection

On/Off

Light source

LED COB

CRI

Ra>90

Material

Aluminium

Product Parameter

Model	Power	Dimension	Hole size
X289SA1	7W	Φ55*H93.5mm	Φ55mm
X289SA1-2	7Wx2	L124*W61*H98.6mm	117*52mm
X289SA1-3	7Wx3	L187*W61*H98.6mm	180*52mm

Color


Matte white



X289SA1

Adjustable/Narrow border

1230




Φ55




X289SA1-2

Adjustable/Narrow border

2460




117x52



X289SA1-3

Adjustable/Narrow border

3675



180x52

Light distributions



... Supports multiple intelligent linking methods

IP20

F

CE

41

CEILING LIGHT

X337A · CEILING LIGHTS



Beam angle

12°

24°

40°

CCT

3000K

3500K

4000K

5000K

Input voltage

AC220V

Electrical connection

On/Off

Light source

LED COB

CRI

Ra>90

Material


Aluminium

Product Parameter

Model	Power	Dimension	Hole size
X337A1	7W	Φ 55*H93.5mm	Φ 50mm
X337A1-2	7Wx2	L124*W61*H66mm	117*52mm
X337A1-3	7Wx3	L187*W61*H66mm	180*52mm

Color


Matte white

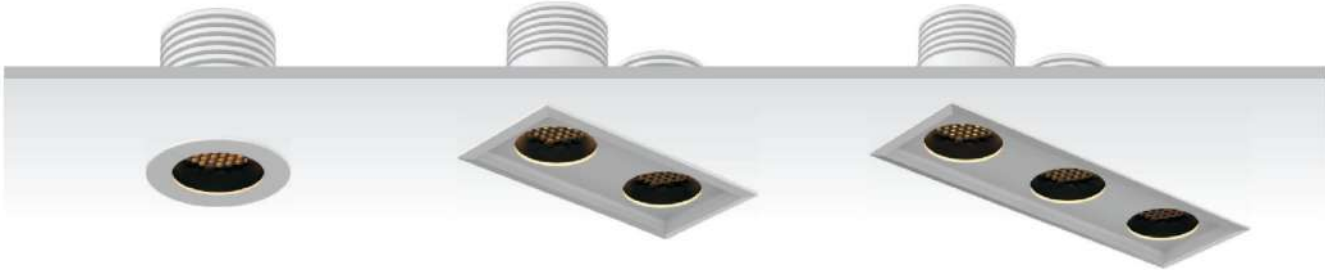

X377A1

Adjustable/Narrow border


1135



X377A1-2

Adjustable/Narrow border


2270



X377A1-3

Adjustable/Narrow border

3460



Light distributions





... Supports multiple intelligent linking methods

IP20

F

CE

CEILING LIGHT

X666 SMD · CEILING LIGHTS



Beam angle

120°

CCT

3000K

3500K

4000K

5000K

Input voltage

AC220V

Electrical connection

On/Off

Light source

LED SMD

CRI

Ra>90

Material

Aluminium

Product Parameter

Model	Power	Dimension	Hole size
X666A-LED	7W	Φ 85*H48.3mm	Φ 75mm
X666B-LED	12W	Φ 100*H57mm	Φ 95mm
X666C-LED	18W	Φ 126*H65mm	Φ 115mm
X666D-LED	24W	Φ 148*H76mm	Φ 135mm
X666E-LED	30W	Φ 176*H78.4mm	Φ 165mm


Color

Ivory white + Space gray




X666A-LED-7W

625




X666B-LED-12W

715




X666C-LED-18W

1165




X666D-LED-30W

1475



X666E-LED-35W

1975



Light distributions





... Supports multiple intelligent linking methods

IP20

F

CE

CEILING LIGHT

X666 COB · CEILING LIGHTS



Beam angle



120°

CCT



3000K 3500K 4000K 5000K

Input voltage

AC220V

Electrical connection

On/Off

Light source

LED COB

CRI

Ra>90

Material

Aluminium

Product Parameter

Model	Power	Dimension	Hole size
X666A-COB	7W	Φ 85*H48.3mm	Φ 75mm
X666B-COB	12W	Φ 100*H57mm	Φ 95mm
X666C-COB	18W	Φ 126*H65mm	Φ 115mm
X666D-COB	30W	Φ 148*H76mm	Φ 135mm
X666E-COB	35W	Φ 176*H78.4mm	Φ 165mm






Color

Lvory white + Space gray



X666A-COB-7W X666B-COB-12W X666C-COB-18W X666D-COB-30W X666E-COB-35W

625 715 1165 1620 2350



Light distributions





... Supports multiple intelligent linking methods

IP20 F CE




DOWN LIGHT SERIES
CEILING DUNK LIGHT SERIES

UNIT:mm




NO : NO13-75N-COB10RT

Beam angle



Color temperature




Light source
Chip: COB

CRI
Ra≥90+

Material
Die cast aluminum

Product diagram

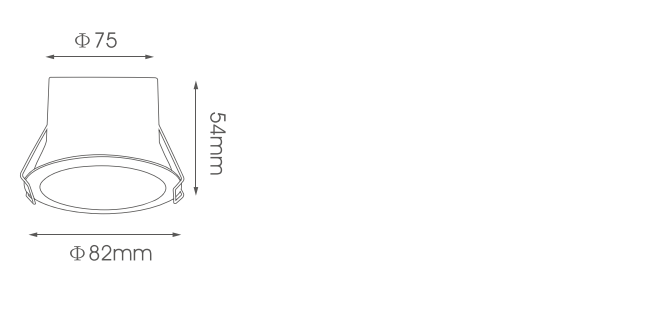

Product Parameter

Model	Voltage	Power	Size(mm)	Cut out(mm)
NO13-75-COB10RT	220V	10W	Φ82*54	Φ75

1405

Product color

- Black
- White


DOWN LIGHT SERIES
CEILING DUNK LIGHT SERIES

UNIT:mm




NO : NO13-75N-COB10RT

Beam angle



Color temperature




Light source
Chip: COB

CRI
Ra≥90+

Material
Die cast aluminum

Product diagram

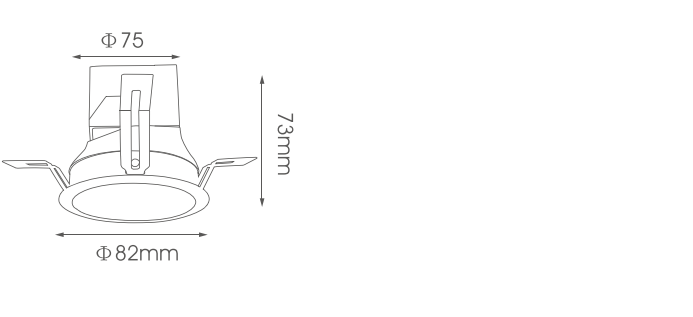

Product Parameter

Model	Voltage	Power	Size(mm)	Cut out(mm)
NO13-75N-COB10RT	220V	10W	Φ82*73	Φ75

1690


Product color

- Black
- White


UNIT:mm




X716-75 <12W
Adjustable



X716-95 <30W
Adjustable



X716-125 <35W
Adjustable



Color
Matte white + gray

Input voltage
AC220V


Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium


Beam angle



Product Parameter

Model	Power	Dimension	Hole size
X716-75	7W /12W	Φ 85.5*66mm	Φ 75mm
X716-75	18W	Φ 112*70mm	Φ 95mm
X716-95	30W	Φ 112*91mm	Φ 95mm
X716-125	35W	Φ 135*85mm	Φ 125mm

CCT



Light distributions



CEILING LIGHT

X818 · CEILING LIGHTS



Color
Sha Bai

Beam angle



Input voltage
AC220V


Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium

CCT



Product Parameter

Model	Power	Dimension	Hole size
X818 (Circular)	12W	Φ 90*80mm	Φ 80mm
	18W	Φ 110*100mm	Φ 102mm
	30W	Φ 135*124mm	Φ 120mm
X818 (Square)	1x12W	91*91*80mm	83*83mm
	1x18W	117*117*100mm	105*105mm
	1x30W	139*139*124mm	125*125mm
X818 (Double-headed)	2x12W	171*91*80mm	155*83mm
	2x18W	211*117*100mm	195*105mm
	2x30W	252*139*124mm	235*125mm

Light distributions




UNIT:mm



X818A-COB
Adjustable circular shape


920





X818A-1-COB
Adjustable square


1190





X818A-2-COB
Adjustable square


1690





X818B-COB
Adjustable circular shape


945





X818B-1-COB
Adjustable square


1230





X818B-2-COB
Adjustable square


1730





X818C-COB
Adjustable circular shape


1890





X818C-1-COB
Adjustable square


2390





X818C-2-COB
Adjustable square

3445





... Supports multiple intelligent linking methods

IP20

F

CE

50


CEILING LIGHT

X6 · CEILING LIGHTS

UNIT:mm



Beam angle



15° 24° 36° 50°

Input voltage

AC220V

Electrical connection

On/Off

Light source

LED COB

CRI

Ra>90

Material


Aluminium

Color

Lvory white

X6-COB30

Adjustable/Circular shape



CCT



3000K 3500K 4000K 5000K

Product Parameter

Model	Power	Dimension	Hole size
X6-COB	30W	Φ140*101mm	Φ130mm

1055

Light distributions





... Supports multiple intelligent linking methods

IP20

F

CE

51

CEILING LIGHT
X504A · CEILING LIGHTS

UNIT:mm



Color: Ivory white

Input voltage: AC220V

Electrical connection: On/Off

Light source: LED COB

CRI: Ra>90

Material: Aluminium

CCT: 3000K, 3500K, 4000K, 5000K

Beam angle: 15°, 24°, 36°

Product Parameter

Model	Power	Dimension	Hole size
X504A-COB	12W	Φ96*H75.5mm	Φ85mm
X504B-COB	18W	Φ125*H110mm	Φ112mm
X504C-COB	35W	Φ164*H70mm	Φ148mm
X504D-COB	50W	Φ200*H170mm	Φ183mm

Light distributions: [Diagram showing light distribution patterns]

Supports multiple intelligent linking methods



CEILING LIGHT
X436 · CEILING LIGHTS

Beam angle: 110°

CCT: 2700K, 3000K, 4000K, 6000K

Input voltage: AC220V

Electrical connection: On/Off

Light source: LED SMD

CRI: Ra>90

Material: Aluminium

Color: Black/White

X436A-5W Fixed: 230

X436B-7W Fixed: 300

X436C-12W Fixed: 420

X436E-15W/18W Fixed: 300

X436F-24W Fixed: 1055


Light distributions: [Diagram showing light distribution patterns]

DOWN LIGHT SERIES
CEILING TUBE LIGHT SERIES | SQUARE OBLIQUE MOUTH




NO : X520AS / D520AS SERIES

Beam angle



Color temperature



Light source

Chip: COB


CRI

Ra≥90+



X520AS-1 X520AS-2 X520AS-3

Product diagram



Die cast aluminum
Face ring color




SQUARE SQUARE OBLIQUE MOUTH-HIGH STYLE




NO : X520A / D520A SERIES

Beam angle



Color temperature



Light source

Chip: COB


CRI

Ra≥90+



X520A-1 X520A-2 X520A-3

Product diagram



Die cast aluminum
Face ring color




DOWN LIGHT SERIES
CEILING DUNK LIGHT SERIES | SQUARE SQUARE ODDER




NO : X520BS / D520BS SERIES

Beam angle



Color temperature



Light source


Chip: COB

CRI

Ra≥90+



Product diagram



Die cast aluminum
Face ring color




SQUARE SQUARE MOUTH - HIGH STYLE

UNIT:mm




NO : X520B / D520B SERIES

Beam angle



Color temperature



Light source


Chip: COB

CRI

Ra≥90+



Product diagram



Die cast aluminum
Face ring color




DOWN LIGHT SERIES
CEILING DUNK LIGHT SERIES | SQUARE SQUARE INCLINED OSCILLATION




NO : X520CS / D520CS SERIES

Beam angle



Color temperature



Light source

Chip: COB


CRI

Ra≥90+



X520CS-1 X520CS-2 X520CS-3

Product diagram



Die cast aluminum
Face ring color




SQUARE ROUND SLANTED MOUTH-HIGH STYLE

UNIT:mm




NO : X520C / D520C SERIES

Beam angle



Color temperature



Light source

Chip: COB


CRI

Ra≥90+



X520C-1 X520C-2 X520C-3

Product diagram



Die cast aluminum
Face ring color



DOWN LIGHT SERIES
CEILING DUNK LIGHT SERIES | ROUND SLANTED OSCILLATION

NO : X520D / D520D SERIES



D520D





X520D

Color temperature



3000K 4000K 5000K

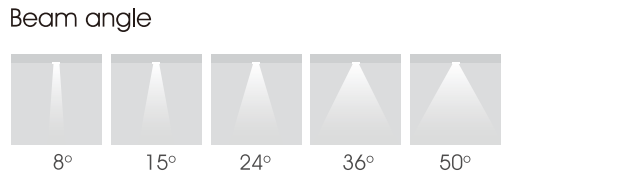

Product diagram	Embedded
	X520D1515 Embedded single head Power 12W Dimension 72x40mm  Hole size 65mm CRI Ra≥90+ Die cast aluminum Face ring color 
	Surface Mounting
	D520D1540 Surface mounted single head Power 12W Dimension 61.3x67.5mm

NO : X520E / D520E SERIES



D520E





X520E

Color temperature



3000K 4000K 5000K

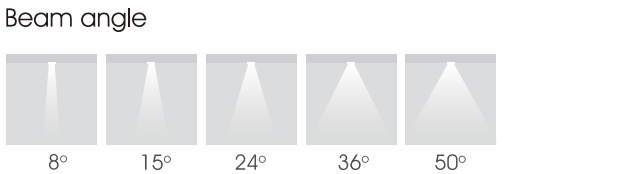

Product diagram	Embedded
	X520E1515 Embedded single head Power 12W Dimension 72x50mm  Hole size 65mm CRI Ra≥90+ Die cast aluminum Face ring color 
	Surface Mounting
	D520E1540 Surface mounted single head Power 12W Dimension 61.3x67.5mm

DOWN LIGHT SERIES
CEILING DUNK LIGHT SERIES | SQUARE POLARIZED COVER

NO : X520F/D520F SERIES



D520F





X520F

Color temperature



3000K 4000K 5000K

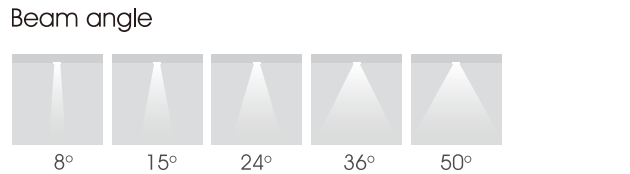

Product diagram	Embedded
	D520F1540 Embedded single head Power 12W Dimension 72x44mm  Hole size 65mm CRI Ra≥90+ Die cast aluminum Face ring color 
	Surface Mounting
	X520F1515 Surface mounted single head Power 12W Dimension 61.3x67.5mm

NO : X520G/D520G SERIES



D520G





X520G

Color temperature





3000K 4000K 5000K

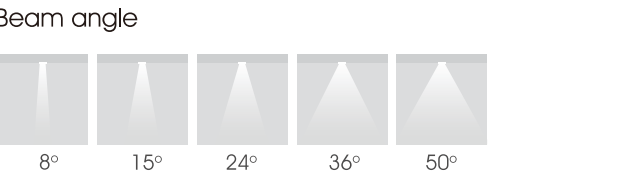

Product diagram	Embedded
	X520G1515 Embedded single head Power 12W Dimension 72x72x44mm  Hole size 65mm CRI Ra≥90+ Die cast aluminum Face ring color 
	Surface Mounting
	D520G1540 Surface mounted single head Power 12W Dimension 60.5x60.5x73.5mm

CEILING LIGHT

D620 LED · DOWNLIGHT

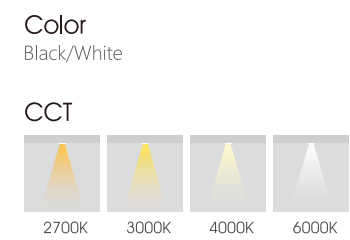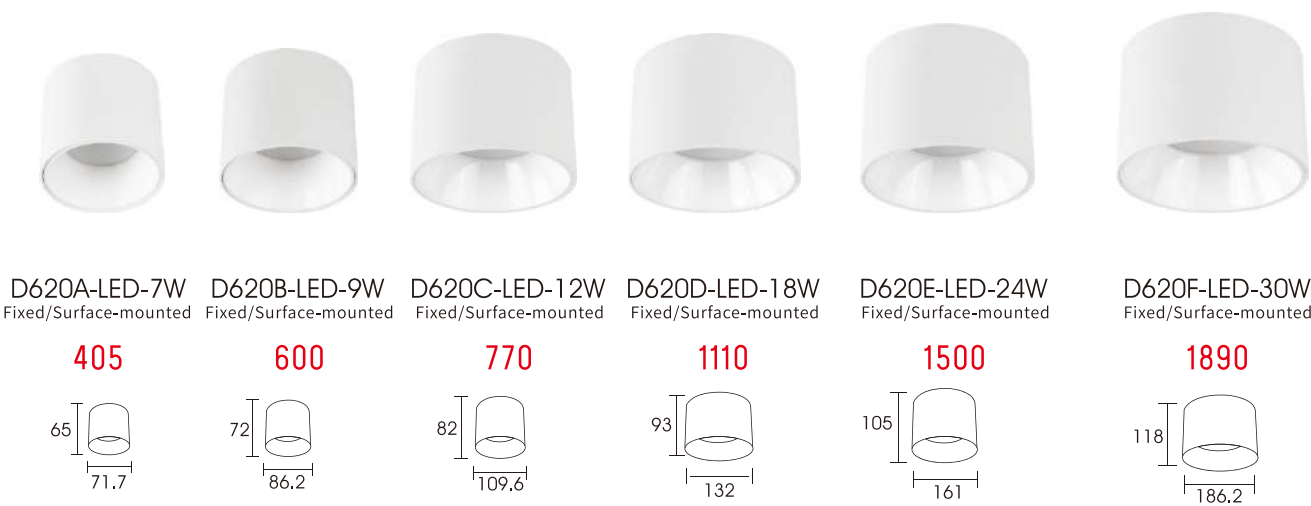

D620-LED				
Model	Power	Dimension	Hole size	Angle
D620A-LED	7W	Φ 71.7x65mm	/	120°
D620B-LED	9W	Φ 86.2x72mm	/	120°
D620C-LED	12W	Φ 109.6x82mm	/	120°
D620D-LED	18W	Φ 132x93mm	/	120°
D620E-LED	24W	Φ 161x105mm	/	120°
D620F-LED	30W	Φ 186.2x118mm	/	120°

Material
Aluminium

Input voltage
AC220V



CRI
Ra>90

Light source
LED SMD

Electrical connection
On/Off



UNIT:mm

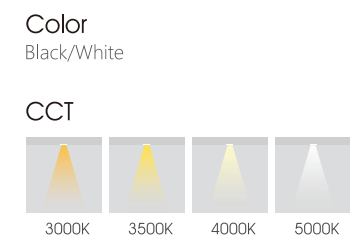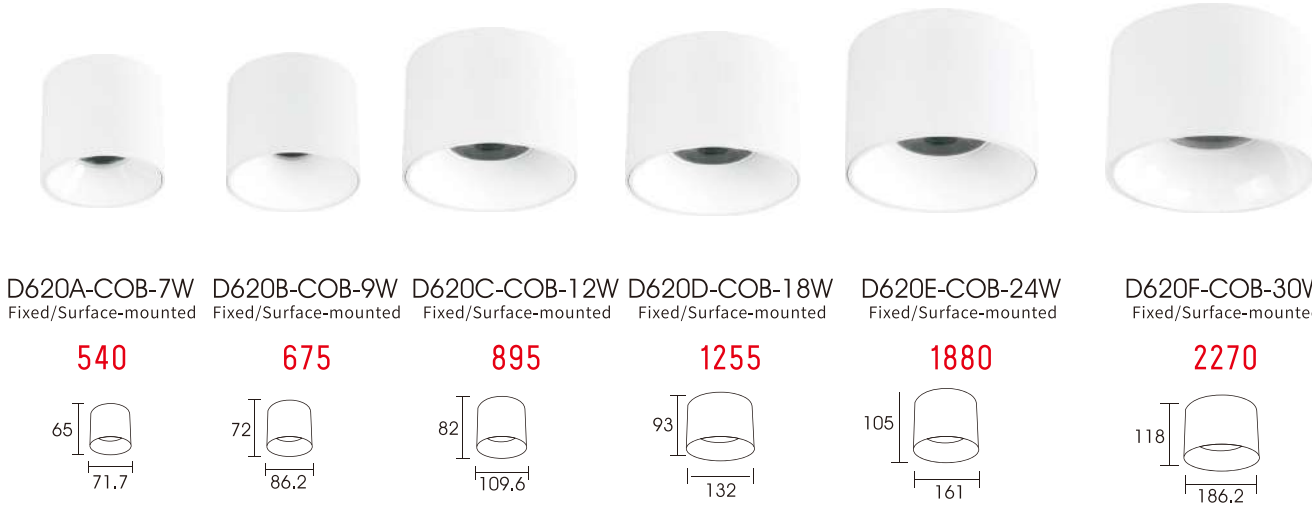

D620-COB				
Model	Power	Dimension	Hole size	Angle
D620A-COB	7W	Φ 71.7x65mm	/	15°/24°/36°
D620B-COB	9W	Φ 86.2x72mm	/	15°/24°/36°
D620C-COB	12W	Φ 109.6x82mm	/	15°/24°/36°
D620D-COB	18W	Φ 132x93mm	/	15°/24°/36°
D620E-COB	24W	Φ 161x105mm	/	15°/24°/36°
D620F-COB	30W	Φ 186.2x118mm	/	15°/24°/36°

Material
Aluminium

Input voltage
AC220V


CRI
Ra>90

Light source
LED COB

Electrical connection
On/Off



CEILING LIGHT




D619-LED

Model	Power	Dimension	Hole size	Angle
D619-1T-LED5RT	5W	/	49*49*82.7	15°/24°/36°
D619-4T-LED20RT	20W	/	85.5*85.5*88	15°/24°/36°
D619-9T-LED28RT	28W	/	125*125*88.5	15°/24°/36°



880 2580 4780



D617B-COB

Model	Power	Dimension	Hole size	Angle
D617A-COB12CT	12W	70x70xH140mm	/	15°/24°/36°
D617B-COB18CT	18W	100x100xH160mm	/	15°/24°/36°
D617C-COB30CT	30W	120x120xH180mm	/	15°/24°/36°



1190 1800 2525

CCT



3000K 3500K 4000K 5000K

Light distributions



Material
Aluminium

Input voltage
AC220V

CRI
Ra>90

Light source
LED COB

Electrical connection
On/Off



... Supports multiple intelligent linking methods



220V

CEILING
SPOTLIGHT
SERIES

CRI
Ra≥90+

CCT
3000K/4000K/5000K

Color
 Black
 White




UNIT:mm



NO: X13N SERIES

Beam angle



Chip
COB

CRI
Ra≥90+

Material
Die cast aluminum

Drive
Benhao

Product Parameter


Model	Voltage	Power	Size(mm)	
X13N-H25	220V	3W	Φ35xL50	1055
X13N-H35	220V	5W	Φ35xL58	1110
X13N-H45	220V	7W	Φ35xL65	1190
X13N-H25L	220V	7W	Φ35xL85	1135
X13N-H35L	220V	9W	Φ35xL85	1165
X13N-H40L	220V	12W	Φ35xL85	1405




Product color

- Black
- White

Product diagram



Color temperature




CEILING SPOTLIGHT SERIES




X13-55-3W

1190




X13-65-5W

1310




X13-75-9W

1485




X13-55-7W

1285




X13-65-9W

1435




X13-75-12W

1570



SMALL SQUIRREL SERIES 48V

○ Ra≥90+
CRI

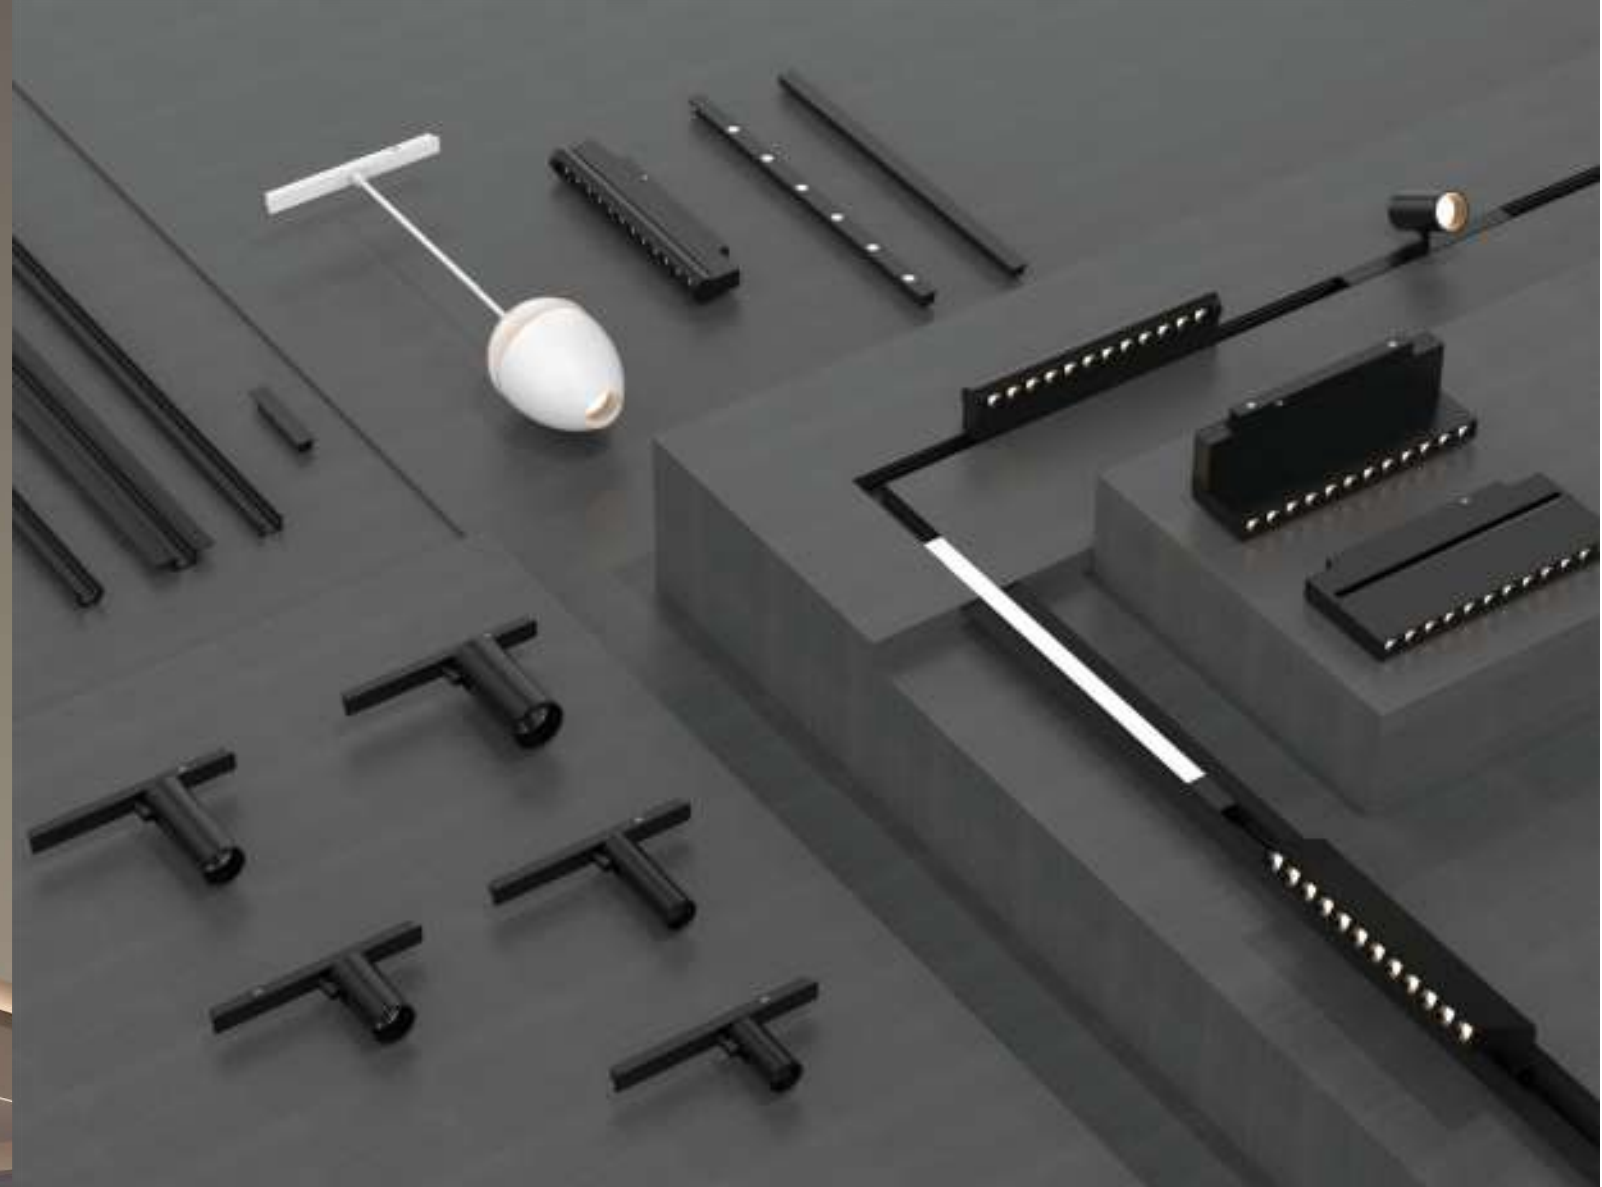

0.9CM
EXTREMELY
NARROW MAGNETIC HEAD
SERIES

MAGNETIC TRACK LIGHT SERIES


Extremely narrow
Magnetic suction head series




UNIT:mm

Infinity series


EMBEDDED



SURFACE MOUNTING



ROUND



Power Supply

216



Single side connection

216



Angle connection

216


MAGNETIC TRACK LIGHT SERIES

UNIT:mm



NO: V13-H SERIES

Beam angle



Chip
COB

CRI
Ra≥90+

Material
Die cast aluminum

Drive
Benhao

Product Parameter


Model	Voltage	Power	Size(mm)	
V13-H25	48V	3W	Φ25xL50	1255
V13-H35	48V	5W	Φ32xL58	1255
V13-H40	48V	7W	Φ40xL65	1310
V13-H25L	48V	7W	Φ25xL85	1310
V13-H35L	48V	9W	Φ32xL85	1310
V13-H40L	48V	12W	Φ40xL85	1340




Product color

- ☒ Black
- ☐ White

Product diagram




Color temperature



NO : V13 SERIES

Beam angle



Chip
COB

CRI
Ra≥90+

Material
Die cast aluminum

Drive
Benhao

Product Parameter


Model	Voltage	Power	Size(mm)
V13-30-LED8R	48V	8W	335*15*11
V13-30-LED5RT	48V	5W	335*15*11




Product color

- ☒ Black
- ☐ White

Product diagram



Color temperature




MAGNETIC TRACK LIGHT

V23 SERIES

Two kinds of connection

Can be connected to 220V power supply/DC48V power supply

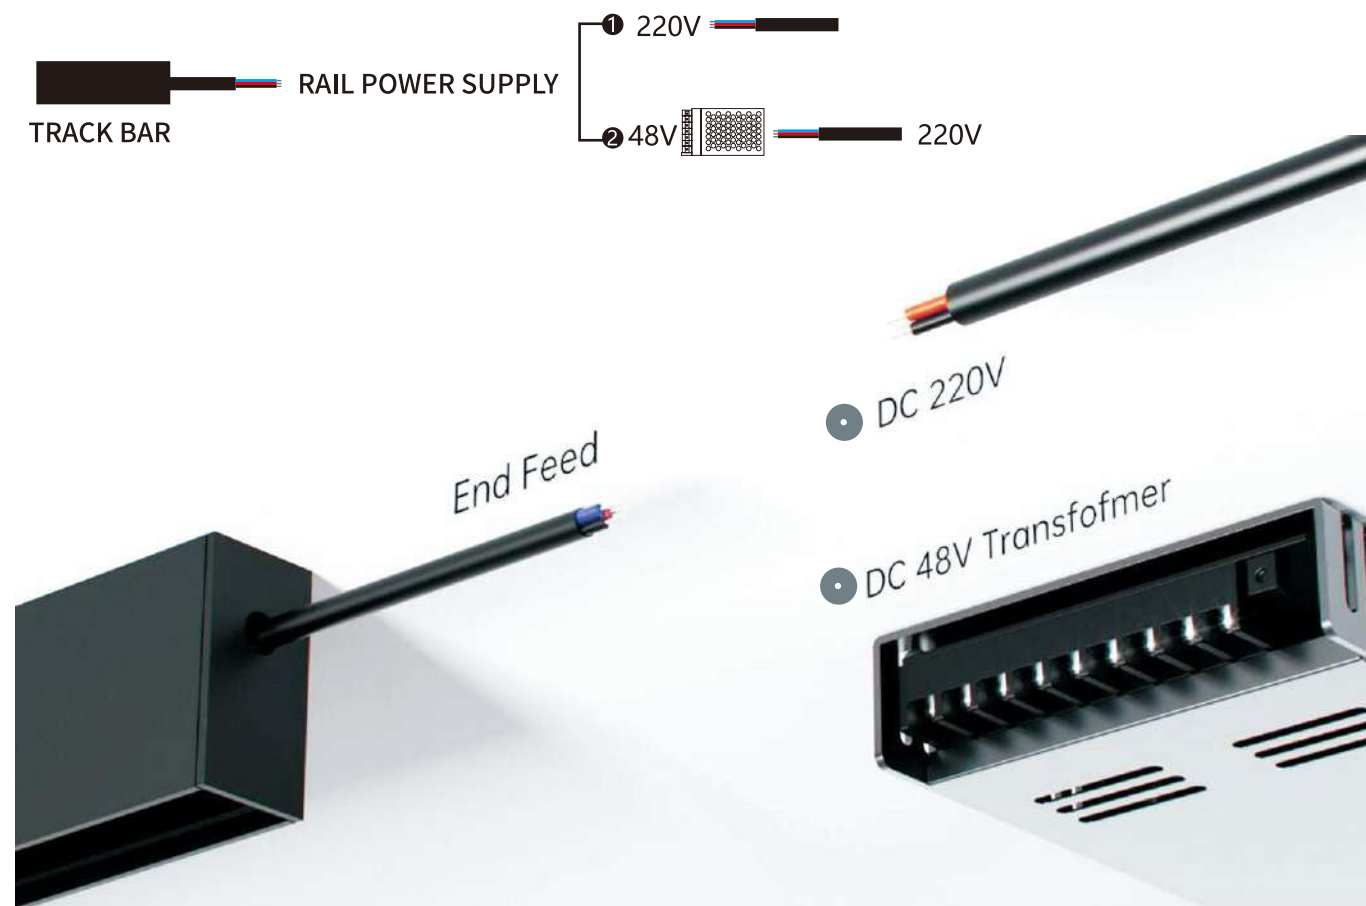


Track power supply application diagram



Safe voltage, Anti-electric shock

Freely replace 202V/48V driver

Lamp installation

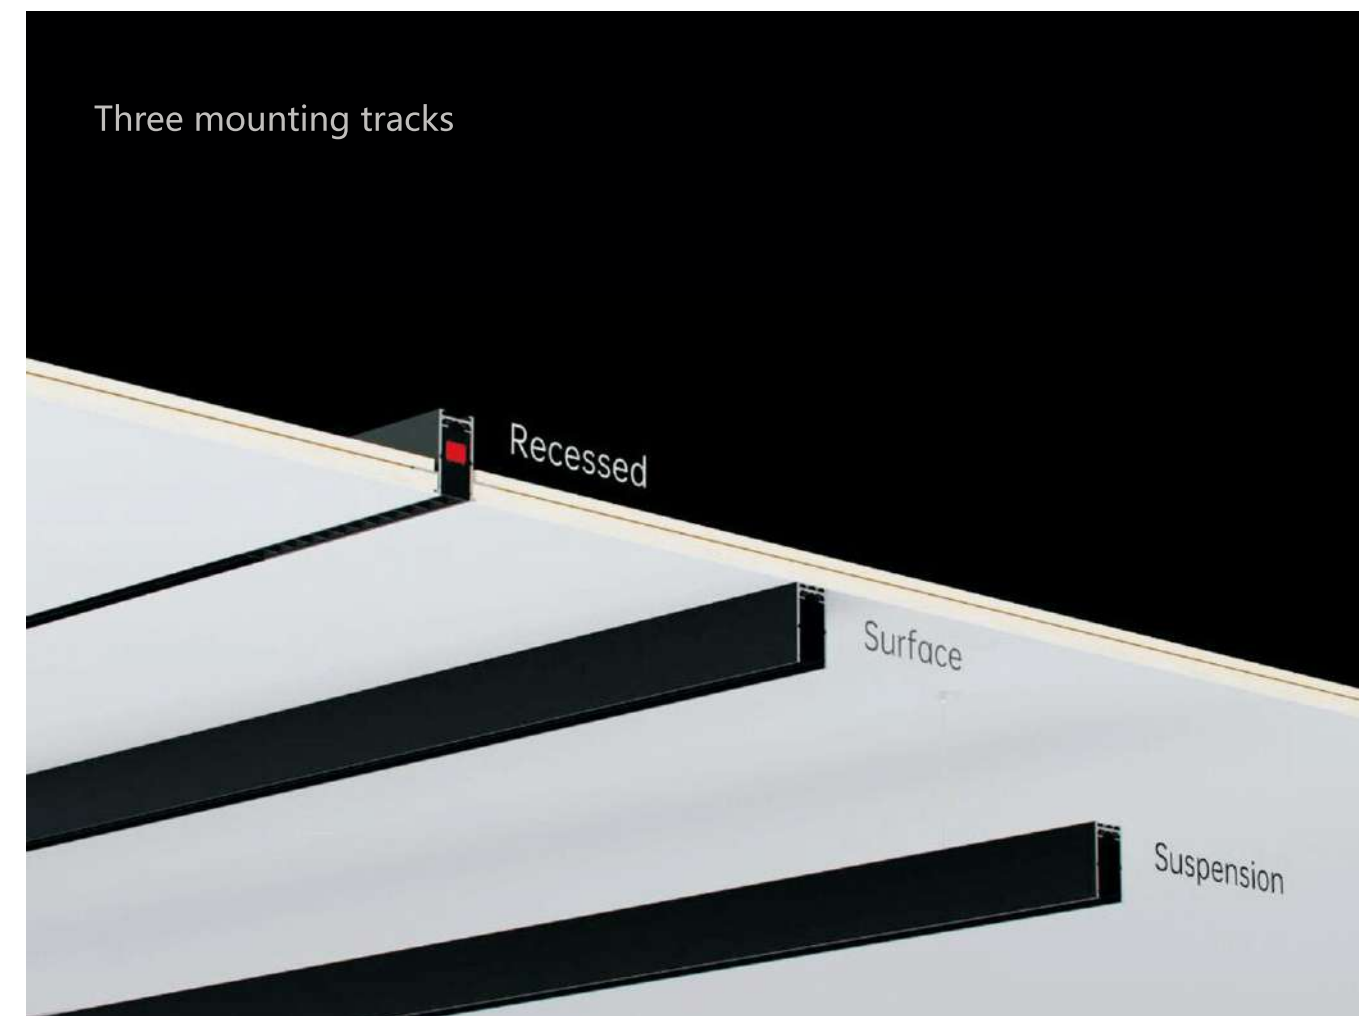


Three installation methods: Embedded installation / Surface installation / Hanging line installation

MAGNETIC TRACK LIGHT

V23



Open/suspended track (thickened aluminum with four copper cores)



V23 Two mounting tracks - fittings 1000/M




Corner (concealed)



Corner (plain)



Concealed track (thickened aluminum four copper core)



V23 Two mounting tracks - fittings 1110/M



Angle module




Output power module



Through module

TECHNICAL DETAILS

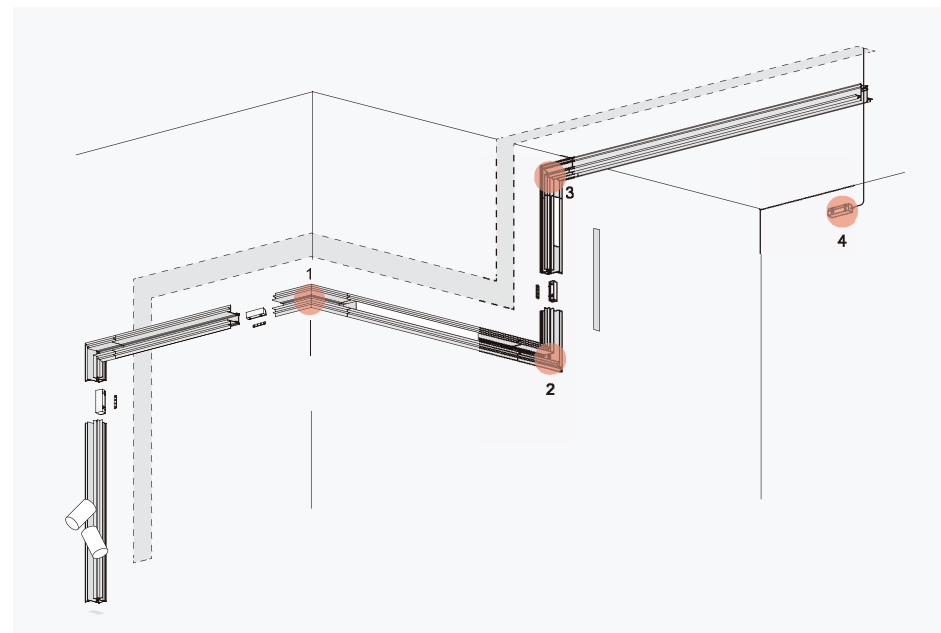

1. Outside corner
2. Plane corner
3. Inside corner
4. Input 48V / 220V power

The standard track length is 3,000 mm. The structure allows cuttingCut any length of the track.
Every 20 meters of track should be connected to a separate power supplyShould connector. A set of tracks connected to a connectorThe maximum load should not exceed 480w.

Beam angle

UNIT:mm

Color
Berlin black

Beam angle




24°



V23ZN-LED12RT
Folding grille module

2055



Beam angle




120°




V23ZB-LED12RT
Folding grille module

2055




V23ZN-LED12R
Folding flood module

2055



V23ZB-LED12R
Folding flood module

2055



Input voltage
AC220V/48V

Electrical connection
On/Off

Light source
LED COB/ SMD


CRI
Ra>90

Material
Aluminium

Product Parameter

Name	Model	Power	Dimension	Installation
V23ZN Folding grille module	V23ZN-LED12RT	12W	44*23*123.5mm	Embedded
	V23ZB-LED12RT	12W	44*23*123.5mm	Embedded
V23ZN Folding flood module	V23ZN-LED12R	12W	44*23*123.5mm	Embedded
	V23ZB-LED12R	12W	44*23*123.5mm	Embedded

CCT



Light distributions




MAGNETIC TRACK LIGHT


V23 FLOODLIGHT MODULE · MAGNETIC LAMP

UNIT:mm

Color
Berlin black

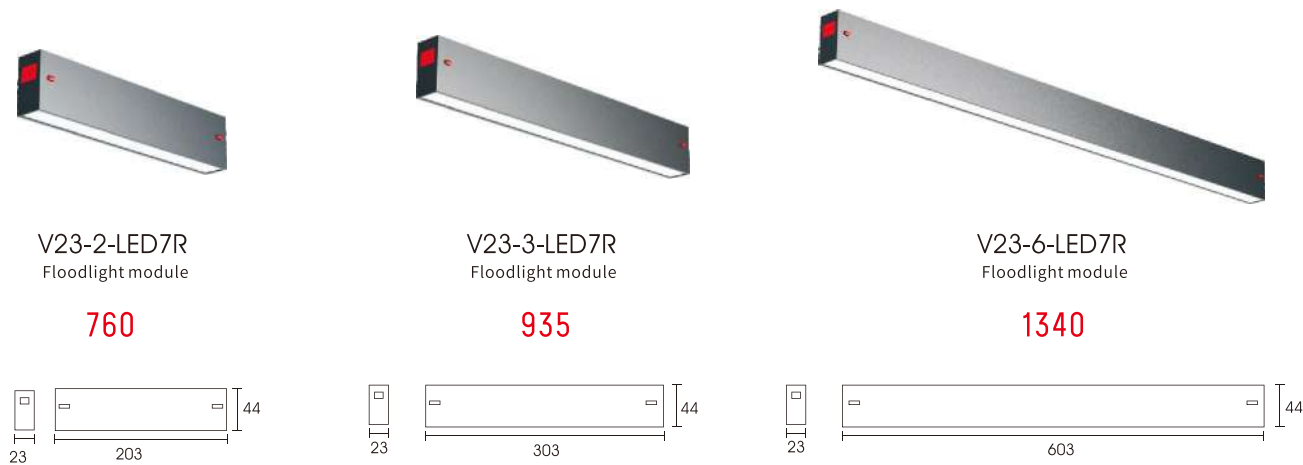

Beam angle



Input voltage
AC220V/48V

Electrical connection
On/Off

Light source
LED COB/ SMD


CRI
Ra>90

Material
Aluminium

Product Parameter

Name	Model	Power	Dimension	Installation
V23- Floodlight module	V23-2-LED7R	7W	203*23*44mm	Embedded
	V23-3-LED7R	12W	303*23*44mm	Embedded
	V23-6-LED7R	18W	603*23*44mm	Embedded

CCT




Light distributions




V23 GRILLE MODULE · MAGNETIC LAMP

UNIT:mm

Color
Berlin black

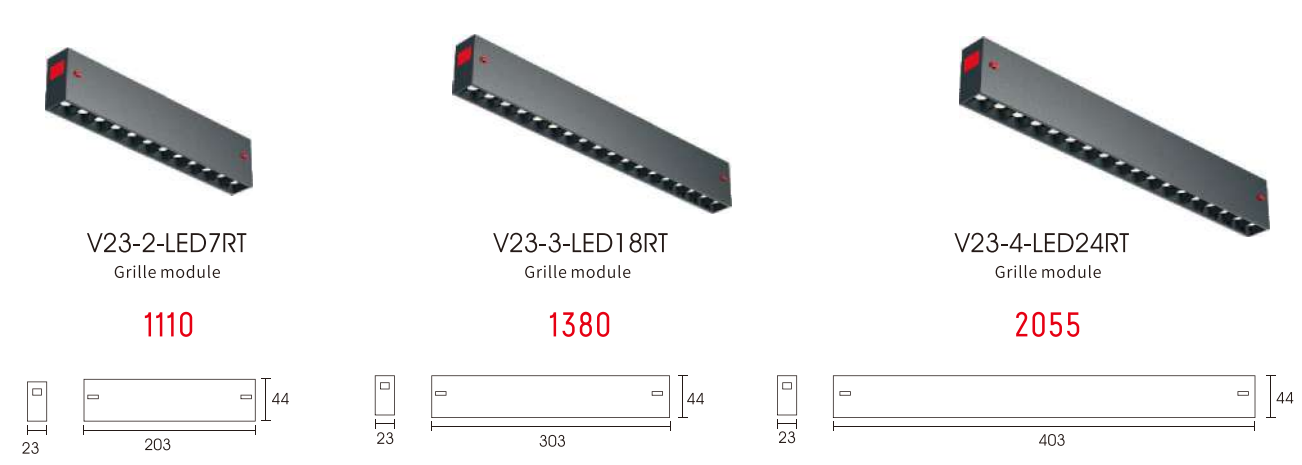

Beam angle



Input voltage
AC220V/48V

Electrical connection
On/Off

Light source
LED COB/ SMD


CRI
Ra>90

Material
Aluminium

Product Parameter

Name	Model	Power	Dimension	Installation
V23- Grille module (Lens type)	V23-2-LED7RT	12W	203*23*44mm	Embedded
	V23-3-LED7RT	18W	303*23*44mm	Embedded
	V23-4-LED7RT	24W	403*23*44mm	Embedded

CCT



Light distributions



MAGNETIC TRACK LIGHT


V23 RAIL TYPE MAGNETIC LIGHT

Color
Matte Black




V23-H289S1
Grille module

1030




V23-H289BMN
Grille module

1540



V23-H289BM
Grille module

1610



Beam angle



Input voltage
AC220V/48V

Electrical connection
On/Off

Light source
LED COB/ SMD


CRI
Ra>90

Material
Aluminium

Product Parameter

Name	Model	Power	Dimension	Installation
V23N-H289 Guide rail model	V23N-H289	12W	Φ41*115mm	Embedded
	V23N-H289	18W	Φ65*130mm	Embedded
	V23N-H289	30W	Φ65*145mm	Embedded

CCT



Light distributions




V23 HANGING WIRE STYLE · MAGNETIC SUCTION LAMP

Color
Matte black/sandy white/yellow/red/blue




V23-V522
Crane module

1435




V23-V523
Crane module

2080




V23 Apple light
Crane module

3730



Beam angle



Input voltage
AC220V/48V

Electrical connection
On/Off

Light source
LED COB/ SMD


CRI
Ra>90

Material
Aluminium

Product Parameter

Name	Model	Power	Dimension	Installation
V23- Cable light	V23-DX522	7W	Φ45*H1300mm	Embedded
	V23-DX523	7W	Φ45*H286mm	Embedded
	V23 Apple light	12W	Φ90*H124mm	Embedded

CCT




Light distributions



MAGNETIC TRACK LIGHT

V3 RAIL TYPE · MAGNETIC SUCTION LAMP

UNIT:mm

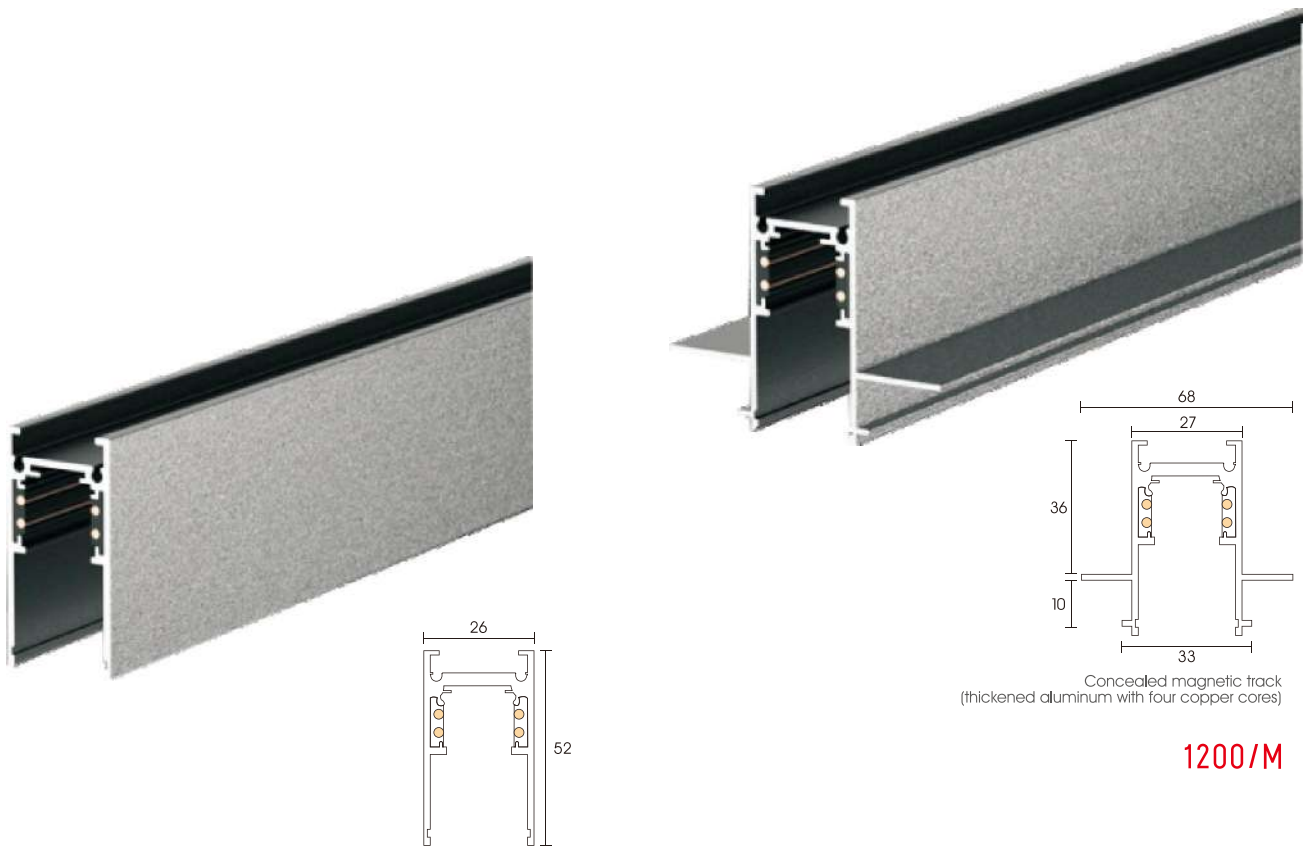

Open/suspended magnetic track
(thickened aluminum four copper core)

1000/M


Concealed magnetic track
(thickened aluminum with four copper cores)

1200/M

V3 two mounting tracks - fittings



V3 two mounting tracks - fittings

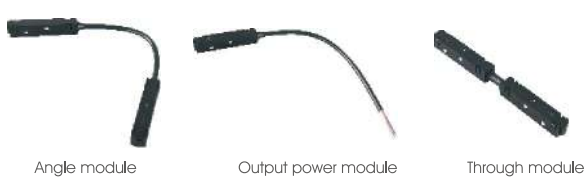

POWER SUPPLY

MAGNETIC LAMP INTEGRATED DRIVE POWER SUPPLY

Low voltage 48V linear lamp

V3 Built-in power supply

Hidden fanless silent power supply
Plug and play, no need for embedment, easy installation



MAGNETIC TRACK LIGHT

V3 FLOODLIGHT · MAGNETIC LIGHT

UNIT:mm

Color
Matte Black



V3-30-LED12R
Magnetic flood light module

490



V3-60-LED20R
Magnetic flood light module

810

Beam angle



150°

CCT



2700K 3000K 4000K 6000K

Input voltage

AC220V/48V

Electrical connection

On/Off

Light source

LED COB/ SMD



CRI

Ra>90

Material

Aluminium

Light distributions



Product Parameter

Name	Model	Power	Dimension	Installation
V3 Magnetic flood light module	V3-30-LED12R	12W	25*22*300mm	Embedded
	V3-30-LED20R	20W	25*22*600mm	Embedded

V3 LENS STYLE · MAGNETIC SUCTION LAMP

UNIT:mm

Color
Matte Black



V3-10-LED6RT
Magnetic lens module

405



V3-20-LED12RT
Magnetic lens module

580



V3-30-LED15RT
Magnetic lens module

810



V3-40-LED20RT
Magnetic lens module

985

Beam angle



24°

CCT



2700K 3000K 4000K 6000K

Input voltage

AC220V/48V

Electrical connection

On/Off

Light source

LED COB/ SMD





CRI

Ra>90

Material

Aluminium

Light distributions



Product Parameter

Name	Model	Power	Dimension	Installation
V3 Magnetic lens module	V3-10	6W	25*22*100mm	Embedded
	V3-20	12W	25*22*200mm	Embedded
V3 Magnetic lens module	V3-30	15W	25*22*300mm	Embedded
	V3-40	20W	25*22*400mm	Embedded

MAGNETIC TRACK LIGHT

V3 FOLDING STYLE · MAGNETIC SUCTION LAMP


UNIT:mm

Color
Matte Black




V3Z-10-LED
Magnetic folding module

540




V3Z-20-LED
Magnetic folding module

810




V3Z-30-LED
Magnetic folding module

1150



V3Z-40-LED
Magnetic folding module

1460



Beam angle



24°

CCT



2700K

3000K

4000K

6000K

Product Parameter

Name	Model	Power	Dimension	Installation
V3Z Magnetic folding module	V3Z-10	6W	53.9*22*100mm	Magnetic attraction
	V3Z-20	12W	53.9*22*200mm	Magnetic attraction
	V3Z-30	15W	53.9*22*300mm	Magnetic attraction
	V3Z-40	20W	53.9*22*400mm	Magnetic attraction

Input voltage
AC220V/48V

Electrical connection
On/Off

Light source
LED COB/ SMD

CRI
Ra>90

Material
Aluminium

Light distributions



V3 RAIL TYPE · MAGNETIC SUCTION LAMP


UNIT:mm

Color
Sand black




V3-H03-COB7
Magnetic guide rail module

745




V3-H03-COB12
Magnetic guide rail module

745



V3-H03-COB18
Magnetic guide rail module

800



Beam angle



24°

CCT



2700K

3000K

4000K

6000K

Product Parameter

Name	Model	Power	Dimension	Installation
V3 Magnetic guide rail module	V3-H03-COB7	7W	Φ50*H103mm	Magnetic attraction
	V3-H03-COB12	12W	Φ65*H103mm	Magnetic attraction
	V3-H03-CO18	18W	Φ75*H103mm	Magnetic attraction

Input voltage
AC220V/48V

Electrical connection
On/Off

Light source
LED COB/ SMD

CRI
Ra>90

Material
Aluminium

Light distributions




MAGNETIC TRACK LIGHT

V20 LENS STYLE · MAGNETIC SUCTION LAMP

UNIT:mm

Color
Black/White



Beam angle



CCT



Input voltage
DC48V

Electrical connection
On/Off

Light source
LED COB

CRI
Ra>90

Material
Aluminium

Product Parameter

Name	Model	Power	Dimension	Installation
V20-Magnetic lens module	V20L-2-LED12RT	12W	216.6*22.5*62mm	Magnetic attraction

2055

Light distributions




V11 FLOOD LIGHT · MAGNETIC SUCTION LIGHT

UNIT:mm

Color
Black/White



V11-L-LED20E
Magnetic flood light module



Beam angle



CCT



Input voltage
DC48V

Electrical connection
On/Off

Light source
SMD

CRI
Ra>90

Material
Aluminium

Product Parameter

Name	Model	Power	Dimension	Installation
V11-Magnetic flood light module	V11-L-LED20E	20W	303*22*43mm	Magnetic attraction

2135

Light distributions




MAGNETIC TRACK LIGHT

V06


Family design
According to lighting effect and facial rings, various styles and light effects can be selected.
Each kind of facial ring has its own unique light effect.








Rotate 90°, lock the lamp

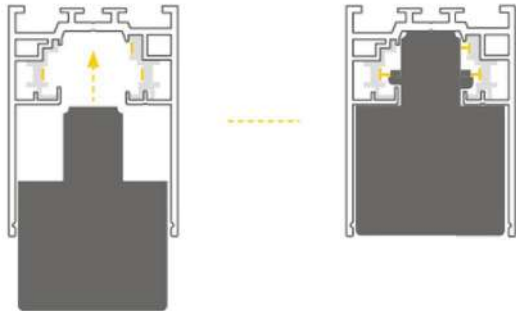

Left physical fixed clasp

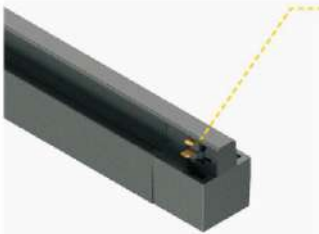

Right conductive copper clip

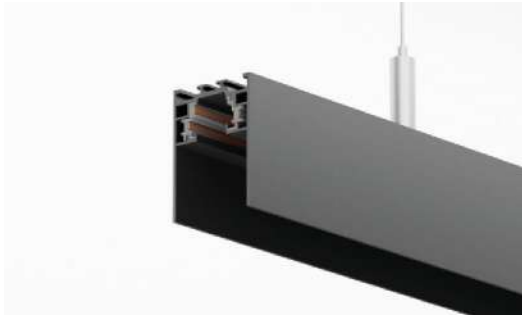

Product details
Specification: 500/1000/1500mm
PRODUCT DETAILS
Length specification: 500/1000/1500mm

945/M

End caps (pair)
Size01(WxHxD) : 38x52x3mm
Size02(WxHxD) : 38x52x8mm



Surface suction fixture
Size01(WxHxD) : 38x52x3mm
Size02(WxHxD) : 38x52x8mm



Suspended suction fixture
Size01(WxHxD) : 38x52x3mm
Size02(WxHxD) : 38x52x8mm

975/M



Direct conductive connector set
Size(LxWxH) : 80x40x18mm



Universal conductive connector set
Size(LxWxH) : 80x40x18mm



TRACK Light



Circular appearance minimalist design, track Light arm and Light body radian consistent; Using the best cold forged aluminum radiator in the industry, the Light front and rear convection design to ensure the built-in glue drive and the Light body heat quickly exported.




TRACK Light

H279



Color
Black/White

Beam angle



Material
Aluminium


Input voltage
AC220V

CRI
Ra>90

Light source
LED COB

Electrical connection
On/Off

CCT



Product Parameter

Model	Power	Dimension
H279A	12W	Φ 71*H115mm
H279B	18W	Φ 75*H145mm
H279C	30W	Φ 75*H145mm
H279CL	35W	Φ 75*H173mm

Light distributions




UNIT:mm




H279A-12W

650




H279B-18W

1055




H279C-30W

1435



H279CL-35W

1515



... .. Supports multiple intelligent linking methods

IP20



TRACK Light

H258



FREE ZOOM

AAdjustable focus · Wide exposure · Focusing point

10°-40°

One lamp has many uses

The focus function solves the choice of the Angle range of your spotlights, bringing you a new scene lighting experience, gently push Pull the lamp head, the light changes with the Angle of light, showing different sizes of aperture and brightness

TRACK Light
H289

UNIT:mm



H258A-COB7CT
Focusing model

1070



H258B-COB12CT
Focusing model

1405



H258C-COB18CT
Focusing model

1620



H258D-COB30CT
Focusing model

2135



Material
Aluminium

Input voltage
AC220V

CRI
Ra>90


Light source
LED COB

Electrical connection
On/Off

Light distributions



CCT



Product Parameter

Model	Power	Dimension	Angle
H258A Focusing model	7W	Φ50*L110mm	10°~40°
H258B Focusing model	12W	Φ64*L117mm	10°~40°
H258C Focusing model	18W	Φ74*L122mm	10°~40°
H258D Focusing model	30W	Φ92*L163mm	10°~40°



... .. Supports multiple intelligent linking methods




... .. Supports multiple intelligent linking methods




UNIT:mm




H289AM
Fixed focus style



H289BMN
Fixed focus style



H289BM
Fixed focus style



H289
Focusing model

Material
Aluminium

Input voltage
AC220V

CRI
Ra>90


Light source
LED COB

Electrical connection
On/Off

Light distributions



CCT



Product Parameter

Model	Type	Power	Dimension	Angle
H289A	Fixed focus style	12W	Φ50*L115mm	15°/24°/36°/50°
H289B	Fixed focus style	12W	Φ66*L135mm	15°/24°/36°/50°
	Focusing model	18W	Φ66*L135mm	10°~50°
H289C	Fixed focus style	30W	Φ74*L145mm	15°/24°/36°/50°
	Focusing model	30W	Φ74*L145mm	10°~50°

1380
1705
2025
1985
2540


TRACK Light

H803



Color
Black/White

Beam angle



Material
Aluminium


Input voltage
AC220V

CRI
Ra>90

Light source
LED COB

Electrical connection
On/Off

CCT



Product Parameter

Model	Power	Dimension	Angle
H803-50	12W	Φ50*103*190mm	15°/24°/36°
H803-18W	18W	Φ65*103*203mm	15°/24°/36°
H803-75	30W	Φ75*103*214mm	15°/24°/36°


Light distributions






H803-50
Fixed focus style

490




H803-65
Fixed focus style

675






H803-75
Fixed focus style

810



TRACK Light



H262-COB

Model	Power	Dimension	Angle	
H262-COB18RD	18W	147*147*226mm	15°/24°/36°	11070

H251-COB

Model	Power	Dimension	Angle	
H251B-COB	18W	Φ94*L72mm	24°	2675
H251C-COB	30W	Φ130,4*L57,8mm	24°	3945

Regular Light blocking Four leaf Focusing



H252-COB

Model	Power	Dimension	Angle	
H252C-COB	35W	Φ130*L58mm	15°/24°/36°	3145

Cellular Network Light blocking Four leaf



CCT



Light distributions



Material
Aluminium

Input voltage
AC220V


CRI
Ra>90

Light source
LED COB

Electrical connection
On/Off




UNIT:mm




H253C-COB

Model	Power	Dimension	Angle
H253C-COB	35W	Φ 130*L57.8mm	24° 3080



H254C-COB

Model	Power	Dimension	Angle
H254C-COB	35W	Φ 130*L47mm	24° 3835



H255-COB

Model	Power	Dimension	Angle
H255-COB	35W	Φ 130.4xL67.8mm	15°/24°/36°

Cellular Network Light blocking Four leaf



3000

3055

3190

CCT



3000K 4000K 6000K

Light distributions



Material
Aluminium

Input voltage
AC220V

CRI
Ra>90

Light source
LED COB


Electrical connection
On/Off



... Supports multiple intelligent linking methods




TRACK Light




H6202B-COB

Model	Power	Dimension	Angle
H6202B-COB	50W	Φ 110xL140xH208mm	15°/24°/36° 3240



H5201-COB

Model	Power	Dimension	Angle
H5201-COB	50W	Φ 105.5*L145.5*H215mm	15°/24°/36° 3730
H5201B-COB35ST	35W	Φ 96*L124*H202mm	15°/24°/36° 2785



H5202-COB

Model	Power	Dimension	Angle
H5202-COB	50W	Φ 108xL180mm	24° 2920

CCT



3000K 4000K 6000K

Light distributions



Material
Aluminium

Input voltage
AC220V

CRI
Ra>90

Light source
LED COB


Electrical connection
On/Off



... Supports multiple intelligent linking methods



LINE Light
XT4550

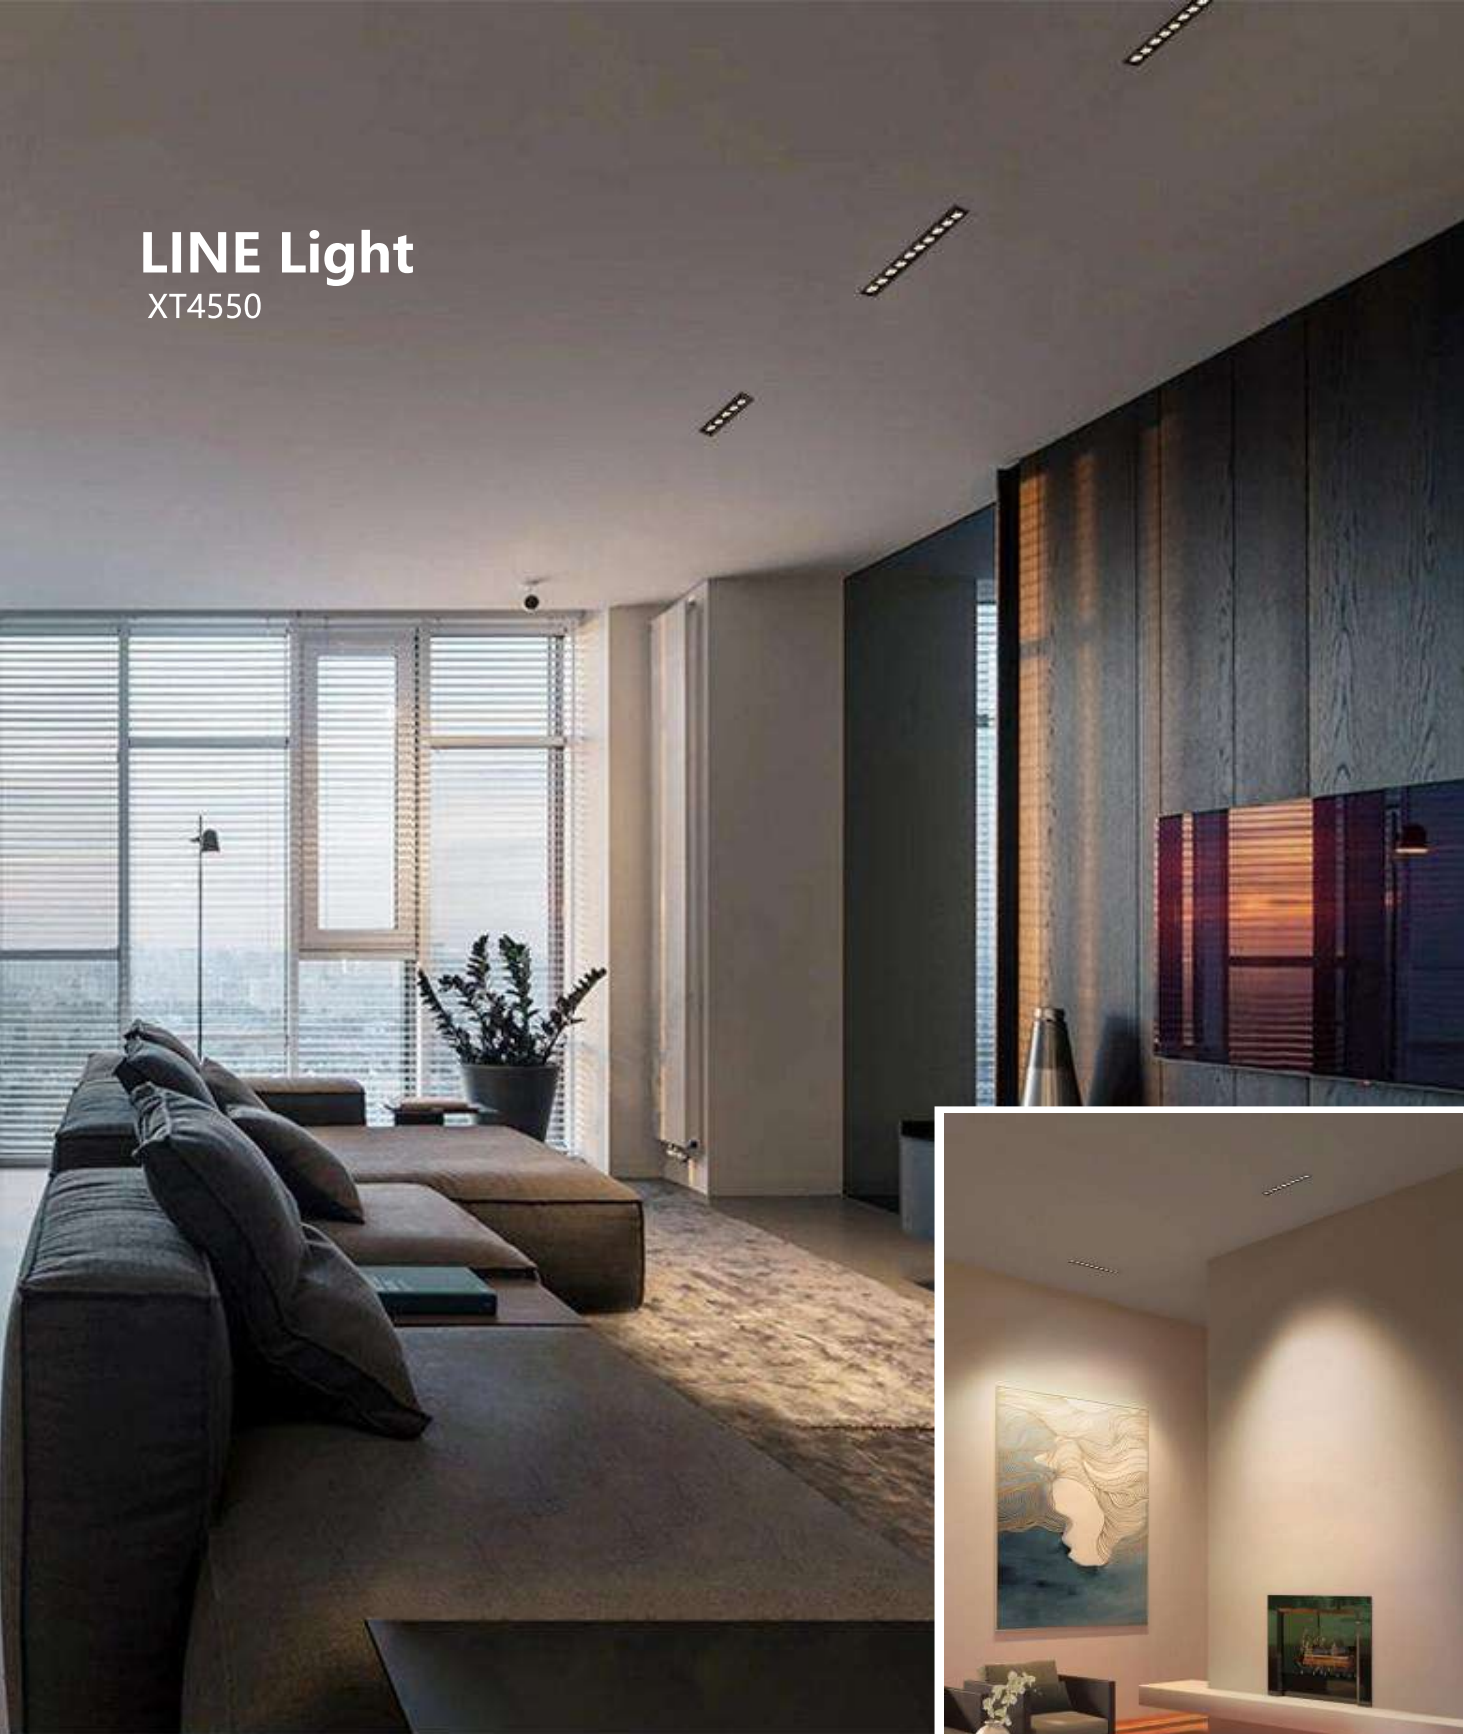

Small size and large light domain
Side-by-side light source concentrated projection, effectively improve the brightness of the regional space, basic lighting or key lighting are applicable

LINE Light
X2312E EDGE STYLE · LINE LIGHT



Material
Aluminium

Input voltage
AC220V



CRI
Ra>90

Light source
LED COB

Electrical connection
On/Off

Color
Black/White

Beam angle





Product Parameter

Model	Power	Dimension	Hole size	
X2312E-1-LED	7W	126x38x39mm	118x30mm	1030
X2312E-2-LED	12W	234x38x39mm	220x30mm	1540
X2312E-4-LED	25W	450x38x39mm	442x30mm	2675
X2312E-6-LED	30W	666x38x39mm	658x30mm	3620
X3312E-1-LED	7W	150.5x49x48mm	143x42mm	1325
X3312E-2-LED	10W	283x49x48mm	275x42mm	1985
X3312E-4-LED	20W	548x49x48mm	540x42mm	3430
X3312E-6-LED	30W	813x49x48mm	805x42mm	4780
X3312E-10-LED	45W	1343x49x48mm	1335x42mm	7425
X4312E-1-LED	15W	207x57.4x58mm	195x50mm	2175
X4312E-2-LED	30W	397x57.4x58mm	385x50mm	3525
X4312E-3-LED	45W	587x57.4x58mm	575x50mm	5200

Light distributions



UNIT:mm

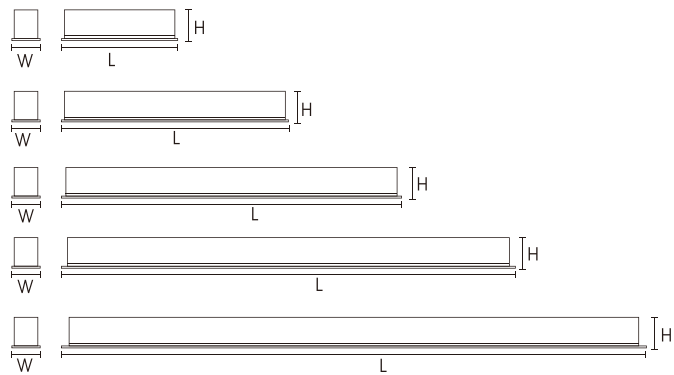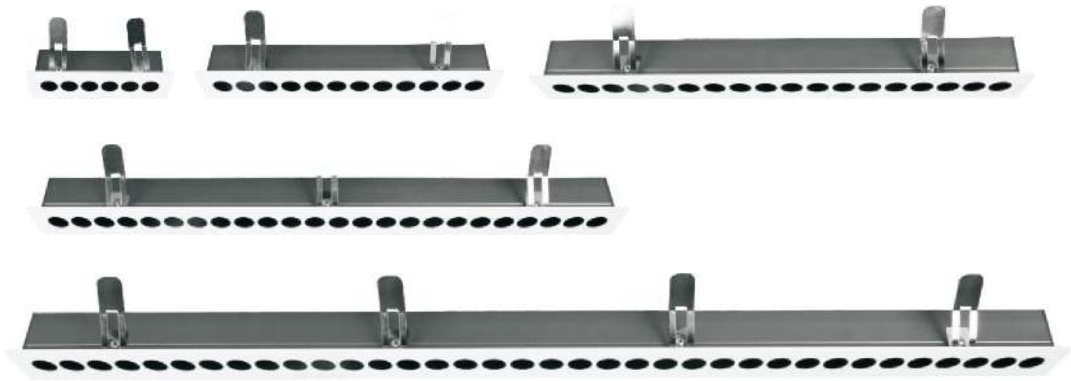

... .. Supports multiple intelligent linking methods



LINE Light

X2312E EDGE STYLE · LINE LIGHT



Material
Aluminium

Input voltage
AC220V


CRI
Ra>90

Light source
LED COB


Electrical connection
On/Off

Color
Sha Bai

Beam angle



CCT





Product Parameter

Model	Power	Dimension	Hole size	
X2312E-1-LED- Endless model	7W	114x69x44mm	116x32mm	1165
X2312E-2-LED- Endless model	12W	222x69x44mm	224x32mm	1865
X2312E-3-LED- Endless model	18W	330x69x44mm	332x32mm	2515
X2312E-4-LED- Endless model	25W	438x69x44mm	440x32mm	3310
X2312E-6-LED- Endless model	30W	654x69x44mm	656x32mm	4565
X3312E-1-LED- Endless model	7W	139x80x48mm	141x45mm	1485
X3312E-2-LED- Endless model	10W	271.4x80x48mm	273.5x45mm	2295
X3312E-3-LED- Endless model	15W	404x80x48mm	406x45mm	3460
X3312E-4-LED- Endless model	20W	536.4x80x48mm	538.5x45mm	4065
X4312E-1-LED- Endless model	15W	194x88.3x62mm	196x52mm	2485
X4312E-2-LED- Endless model	30W	384x88.3x62mm	386x52mm	4160
X4312E-3-LED- Endless model	45W	574x88.3x62mm	576x52mm	6130

Light distributions



UNIT:mm

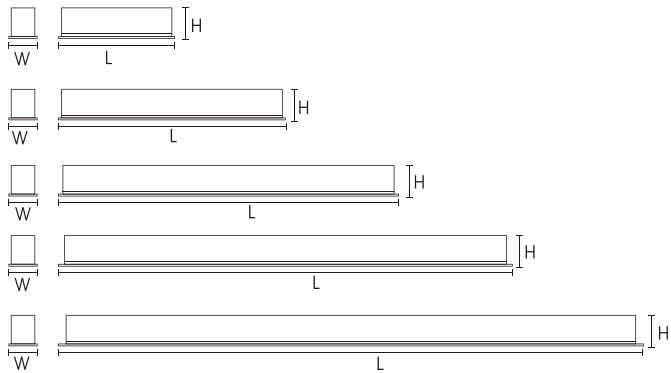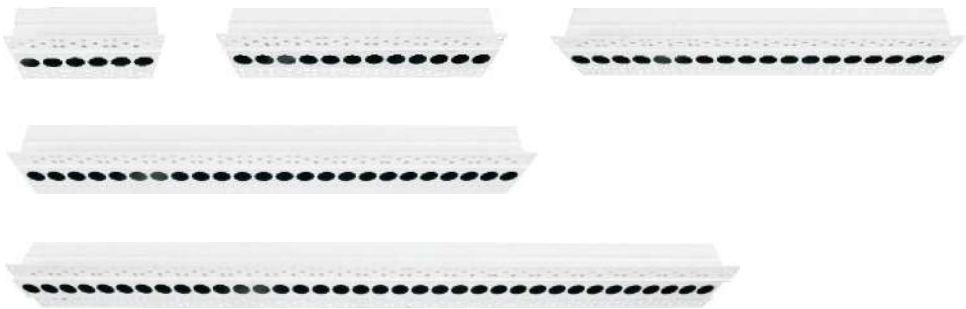

LINE Light

X2312E EDGE STYLE · LINE LIGHT



Material
Aluminium

Input voltage
AC220V



CRI
Ra>90

Light source
LED COB

Electrical connection
On/Off

Color
Sha Bai

Beam angle




Product Parameter

Model	Power	Dimension	Hole size	
XT2312E-1-LED	7W	112x24x66.5mm	/	1000
XI2312E-2-LED	12W	220x24x66.5mm	/	1540
XT2312E-4-LED	25W	436x24x66.5mm	/	2675
XT2312E-6-LED	30W	652x24x66.5mm	/	3460
XT2312E-11-LED	38W	1192x24x66.5mm	/	5835
XT3312E-1-LED	7W	136.5x34.4x70mm	/	1325
/XT3312E-2-LED	14W	269x34.4x70mm	/	1985
XT3312E-4-LED	25W	534x34.4x70mm	/	3430
XT3312E-6-LED	30W	799x34.4x70mm	/	4970
XT3312E-9-LED	45W	1196.5x34.4x70mm	/	7075
XT4312E-1-LED	15W	192x44.7x79.5mm	/	2175
XT4312E-2-LED	30W	382x44.7x79.5mm	/	3525
XT312E-3-LED	45W	572x44.7x79.5mm	/	6455

Light distributions



UNIT:mm

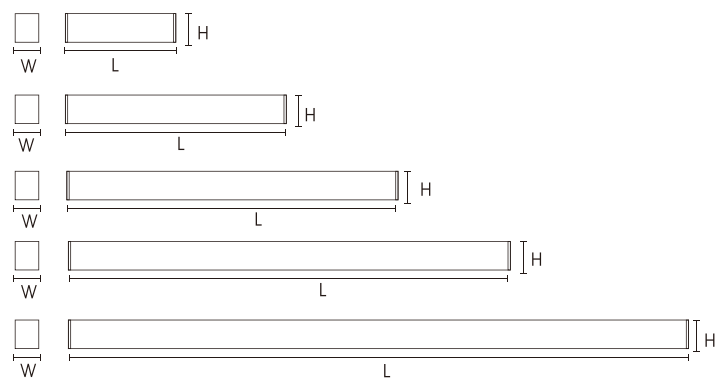


LINE Light

XT3312






PANEL Light

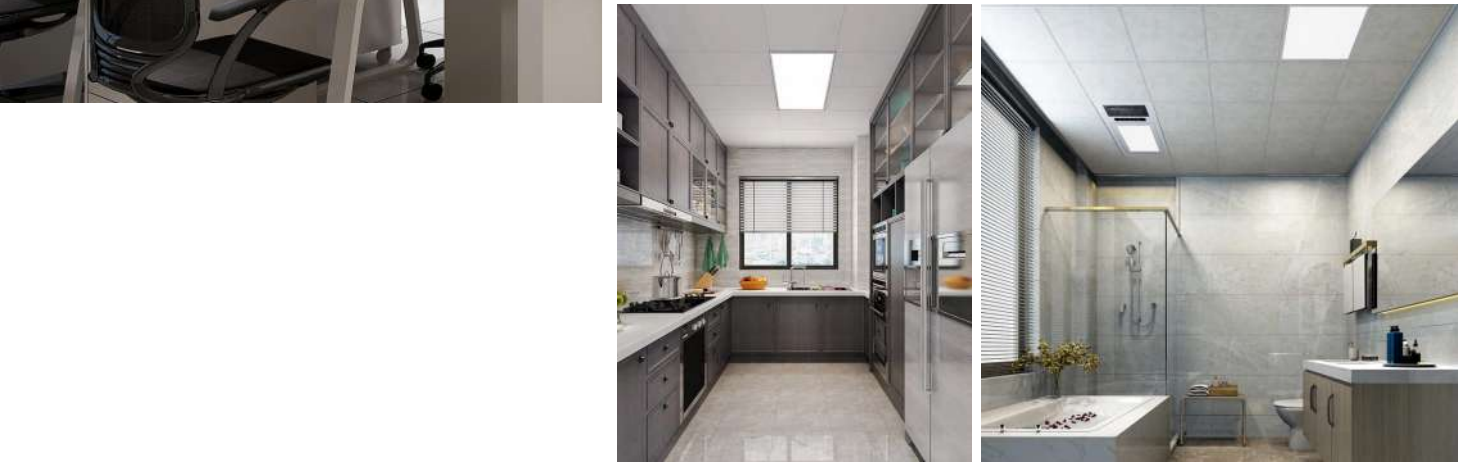

PANEL LIGHT
LARGE SPACE LIGHTING
Angle180°


Simple design,Durable and durable,The light is comfortable and bright,Moisture and smoke proof,Easy to clean
Suitable for: warehouse, office, hospital, supermarket and other large space lighting, as well as home decoration kitchen, bathroom, aisle lighting.

UNIT:mm



Model	Power	Dimension	Hole size	Angle	
X6060H	48W	595x595x30mm	/	180°	1055
X6060H	48W	600x600x30mm	/	180°	1055
X3012F	45W	295x1195x30mm	/	180°	2080
X6012F	100W	595x1195x30mm	/	180°	4590

CCT



Light distributions



Material
Aluminium

Input voltage
AC220V

CRI
Ra>90

Light source
LED COB




Electrical connection
On/Off






Product Parameter


	MODEL NO.	LUMINAIRE MATERIAL & COLOR	Power	LENGTH	NOLED	INPUT VOLTAGE	LUMINOUS FLUX	CRI	IP	BEAM ANGLE
A	5050-12V-14.4W-IP20	WW/CL/WH	14.4W/m	5m	60/m	12V	1100/m	80	20	180
B	5050-24V-14.4W-IP20	RGB	14.4W/m	10m	60/m	24V	1100/m	80	20	180
C	5050-24V-14.4W-IP68	WW/CL/WH	14.4W/m	50m	60/m	24V	900/m	80	68	180
D	5050-24V-14.4W-IP68	RGB	14.4W/m	50m	60/m	24V		80	68	180
E	5050-220V-14.4W-IP65	WW/CL/WH	14.4W/m	100M	60L/M	220V		80	65	180
F	3535-24V-14.4-IP20	RGB	14.4W/m	10m	120/m	24V	1100/m	80	20	180

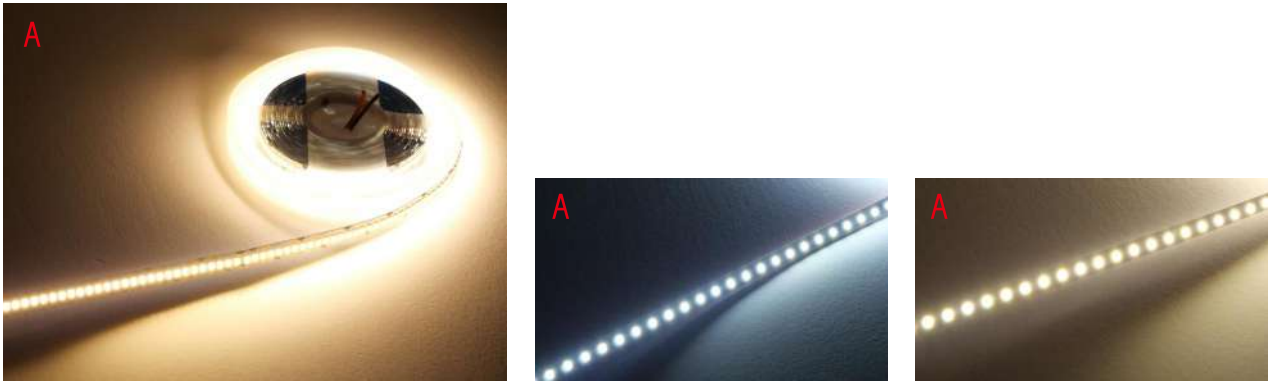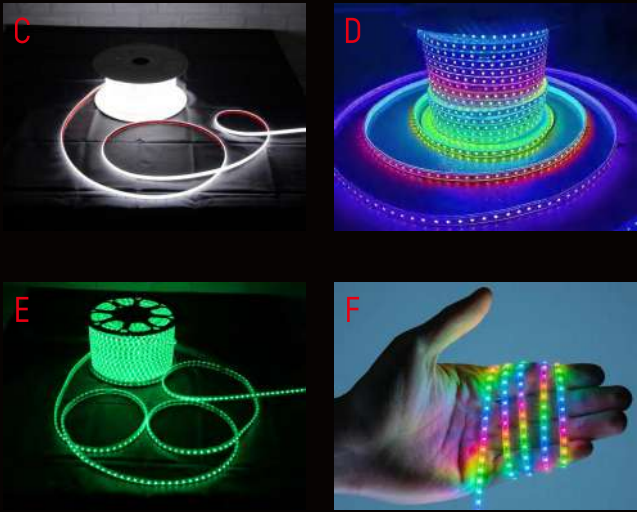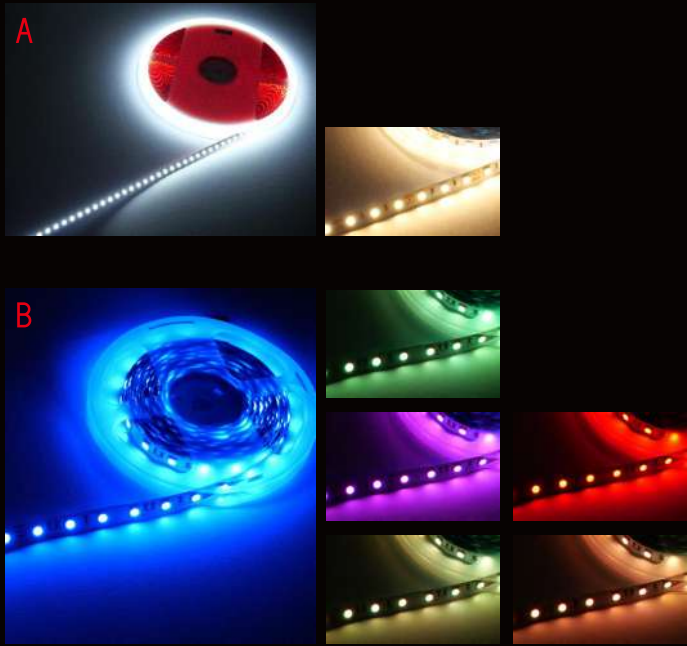

Product Parameter


	MODEL NO.	LUMINAIRE MATERIAL & COLOR	Power	LENGTH	NOLED	INPUT VOLTAGE	LUMINOUS FLUX	CRI	IP	BEAM ANGLE
A	2835R-24V-5W-IP20	WW/CL/WH	5W/m	20m	120/m	24V	500/m	80	20	180
A	2835R-24V-14W-IP20	WW/CL/WH	14.4W/m	10m	120/m	24V	1000/m	80	20	180
A	2835R-12V-21W-IP20	WW/CL/WH	21W/m	5m	240/m	12V	1600/m	80	20	180
B	2835R-24V-14W-IP68	WW/CL/WH	14.4W/m	100m	120/m	24V	750/m	80	68	180

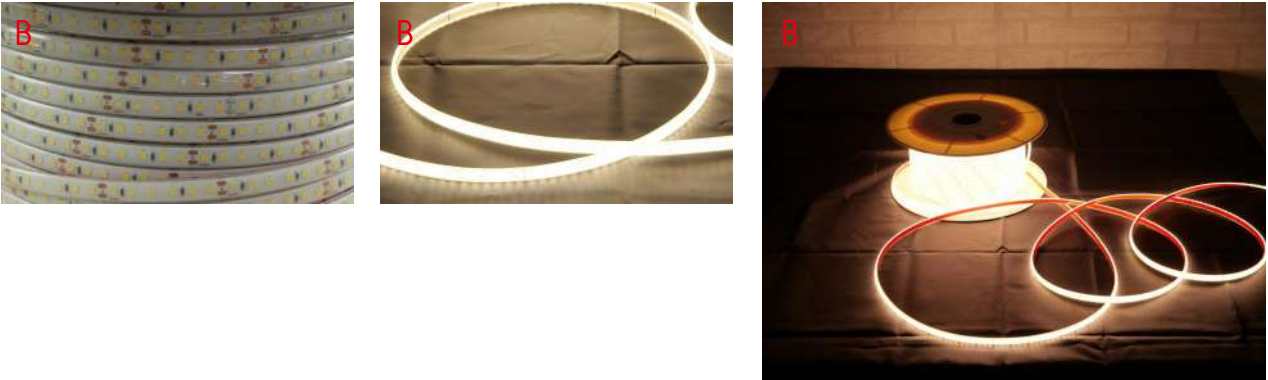

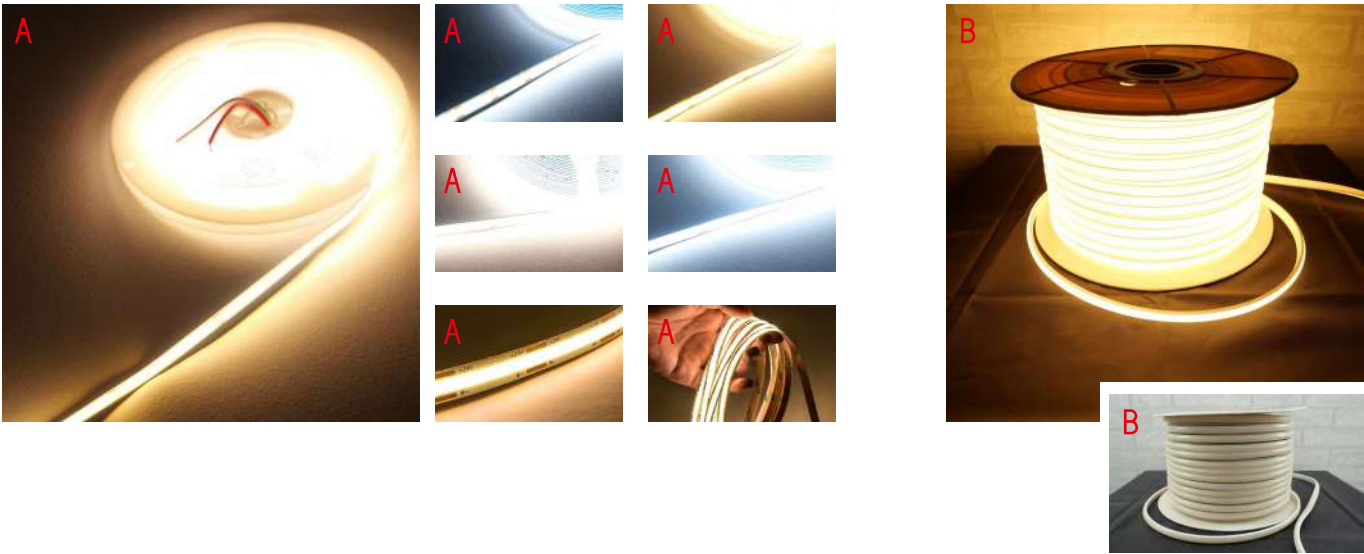



Product Parameter

	MODEL NO.	LUMINAIRE MATERIAL & COLOR	Power	LENGTH	NOLED	INPUT VOLTAGE	CRI	IP	BEAM ANGLE
A	COB320L-24V-12W-IP20-8mm	WW/CL/WH	12W/m	10m	320/m	24V	80	20	180
A	COB320L-12V-12W-IP20-8mm	WW/CL/WH	12W/m	5m	320/m	12V	80	20	180
A	COB480L-24V-12W-IP20-8mm	WW/CL/WH	12W/m	10m	480/m	24V	80	20	180
A	COB480L-24V-12W-IP20-5mm	WW/CL/WH	12W/m	10m	480/m	24V	80	20	180
B	COB288L-220V-12W-IP65	WW/CL/WH	12W/m	100M	488/m	220V	80	65	180
B	COB480L-24V-12W-IP68	WW/CL/WH	12W/m	100m	480/m	24V	80	68	180

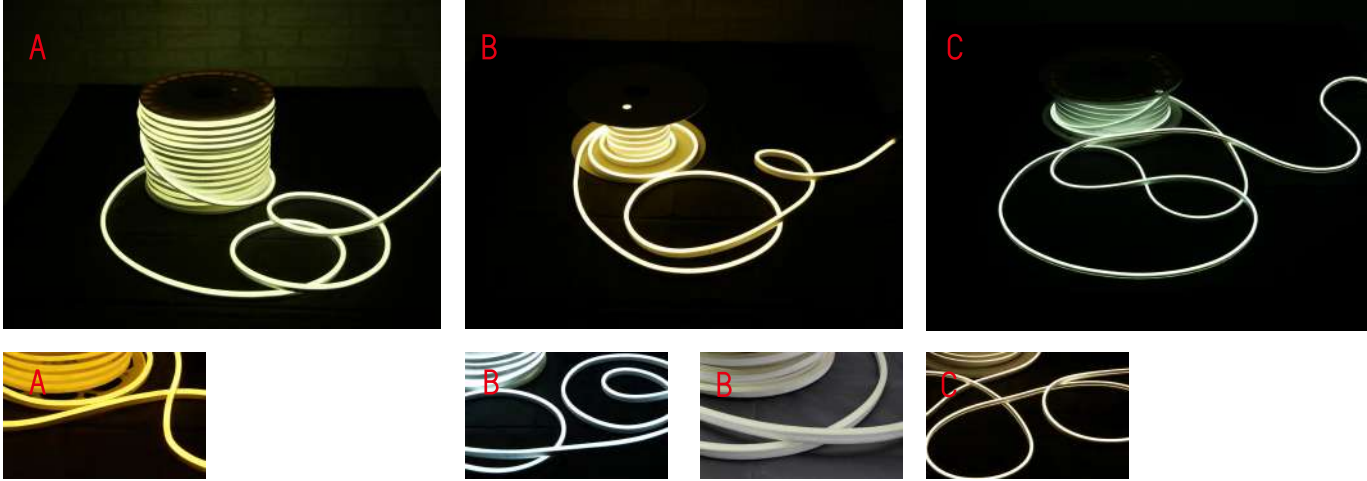



Product Parameter

	MODEL NO.	LUMINAIRE MATERIAL & COLOR	Power	LENGTH	NOLED	INPUT VOLTAGE	LUMINOUS FLUX	CRI	IP	BEAM ANGLE
A	2835-24V-IP65-8*16MM.-120L-12W	WW/CL/WH	12W/m	100m	120/m	24V	110/m	80	65	180
B	2835-220V-12W-IP65	WW/CL/WH	12W/m	100m	120/m	220V	130/m	80	65	180
C	2835-12V-12W-IP65	WW/CL/WH	12W/m	100m	120/m	12V	230/m	80	65	180

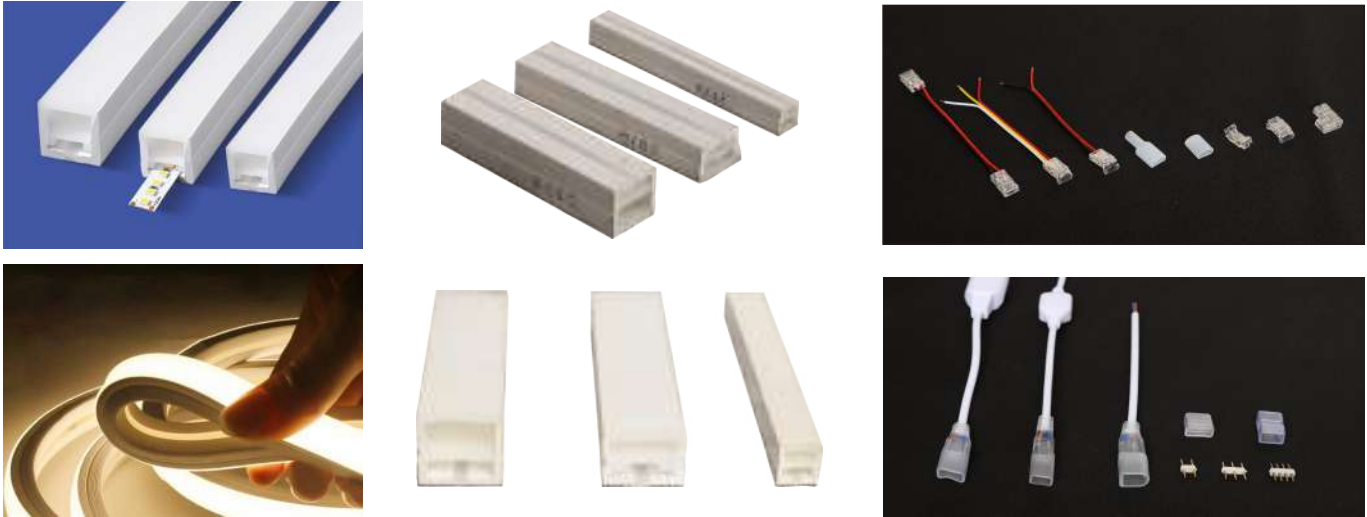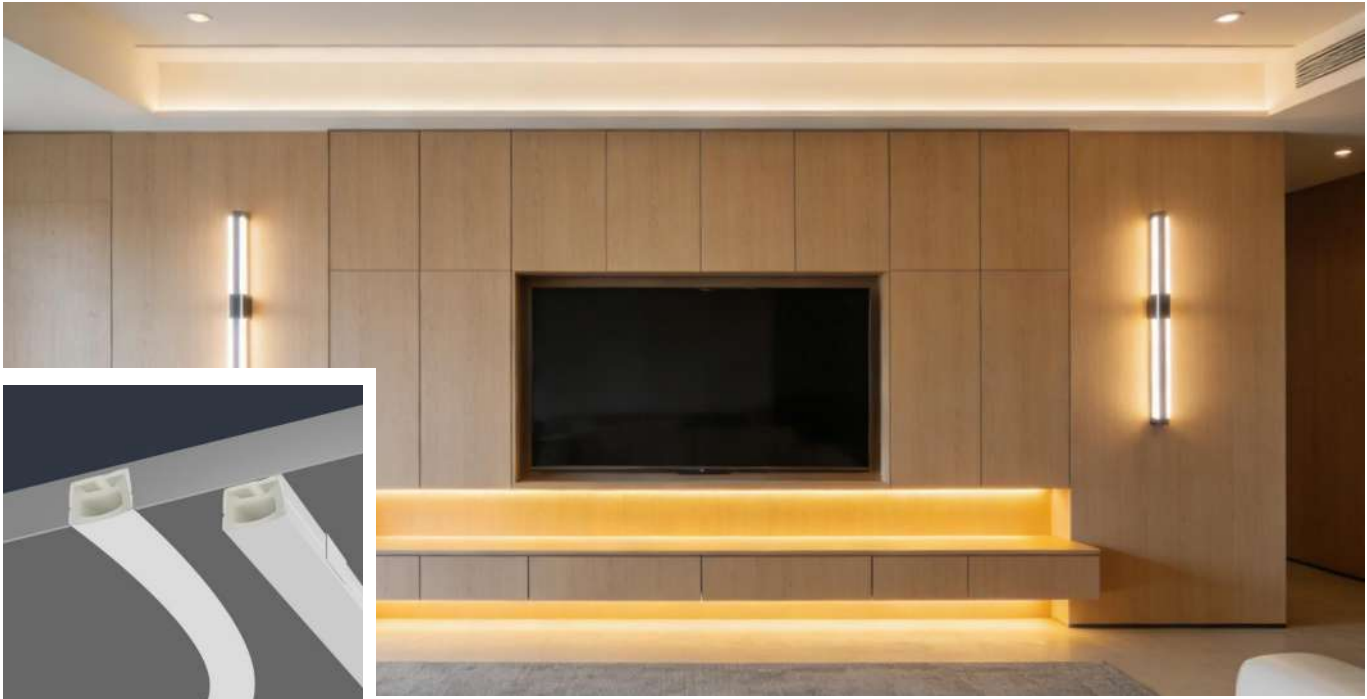

Product Parameter

MODEL	INPUT	OUTUP	IP
CB-45W-24V	170-265V AC 0.5A	24V DC 2.5A	20
CB-60W-24V	170-265V AC 0.5A	24V DC 2.5A	20
CB-100W-24V	170-265V AC 0.8A	24V DC 4.2A	20
CB-200W-24V	170-265V AC 1.6A	24V DC 8.3A	20
CB-300W-24V	170-265V AC 2.2A	24V DC 12.5A	20
CB-500W-24V	170-265V AC 3.6A	24V DC 20.8A	20
CB-45W-12V	100-265V AC 0.5A	12V DC 4A	20
CB-60W-12V	100-265V AC 0.5A	12V DC 5A	20
CB-100W-12V	100-265V AC 0.8A	12V DC 8.3A	20
CB-120W-12V	100-265V AC 0.8A	12V DC 10A	20
CB-150W-12V	100-265V AC 1.2A	12V DC 12A	20
CB-200W-12V	100-265V AC 1.6A	12V DC 16.6A	20
CB-250W-12V	100-265V AC 2.0A	12V DC 20A	20
CB-400W-12V	170-265V AC 2.8A	12V DC 33A	20
LED CONTROLLER	DC12-24V	30A	20
RPE-400W24V	180-240VAC 50/60HZ 4.2A	24V DC 16.6A	
ILED AMPLIFIER	DC5V-24V	10A*3	



A-DL1101-WH 520

- ø70*W90*L90*H65 mm
- Metal
- Gu10



A-H-7865/L-WH 280

- ø70*W90*H38 mm
- Metal
- GU5.3



A-H-7865/L-SN 380

- ø70*W90*H38 mm
- Metal
- GU5.3




A-H81601-BK 240

- ø86*W105*H55 mm
- Metal
- GU5.3



AMT-220712A-BK 600

- ø100*W120*H60 mm
- Metal
- Ar111

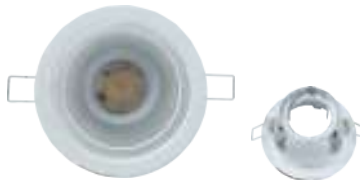

A-DL1102-WH 520

- ø110*W140*H80 mm
- Metal
- GU5.3



A-H1315-WH 280

- ø75*W95*H35 mm
- Metal
- GU5.3



A-DL240506D-1-WH 800

- ø110*W190*L160 mm
- Metal
- Ar111



A-DL240506D-2-WH 1600

- ø190*W375*L160 mm
- Metal
- Ar111



DC-TL-001A-D-BK

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-001A-D-W

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-002A-D-BK

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-001A-T-WH

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-002A-T-BK

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-002A-T-WH

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-003A-T-WH

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-049-T-BK

190

- ก:115 ม:140 ส:180
- Metal E27*1



DC-TL-049-T-WH

190

- ก:115 ม:140 ส:180
- Metal E27*1



DC-TL-048-T-BK

225

- ก:115 ม:140 ส:180
- Metal E27*1



DC-TL-048-T-WH

225

- ก:115 ม:140 ส:180
- Metal E27*1



DC-TL-003A-D-WH

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-003A-T-BK

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-003A-T-WH

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-002A-D-WH

300

- ก:60 ม:70 มม
- Metal
- MR16/220V



DC-TL-073-D-BK

400

- ก:55 ม:100 ส:135
- Metal MR16 220V



DC-TL-073-D-WH

400

- ก:55 ม:100 ส:135
- Metal MR16 220V



DC-TL-073-T-BK

400

- ก:55 ม:100 ส:135
- Metal MR16 220V



DC-TL-073-T-WH

400

- ก:55 ม:100 ส:135
- Metal MR16 220V



A-D3095-1-GD
6000

- W150*L450*H110mm
- Metal & Glass / Gold E14*1



A-D-B6768-1B
2300

- W150 MM* L430 MM* H250 MM
- Metal / Gold G9



A-D-B7013-1-GD
1900

- W 550 MM.* L310 MM.
- Metal / Gold E27*1




A-D6013-1-GD
2200

- W70 L80 H120-ปรับได้3สั WH,WW,CL
- Metal / Gold LED-7W


A-D6013-1-BK
2200

- W70 L80 H120-ปรับได้3สั WH,WW,CL
- Metal / Gold LED-7W

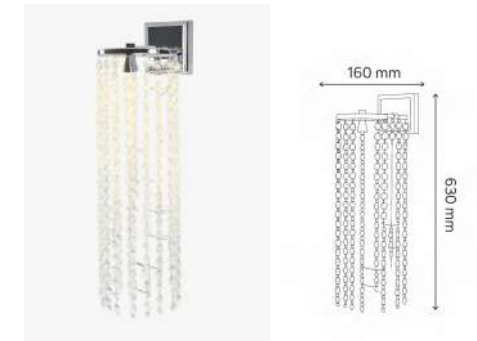


A-D-B7015-1
2200

- W160* L630* H200 mm
- Metal / Silver LED

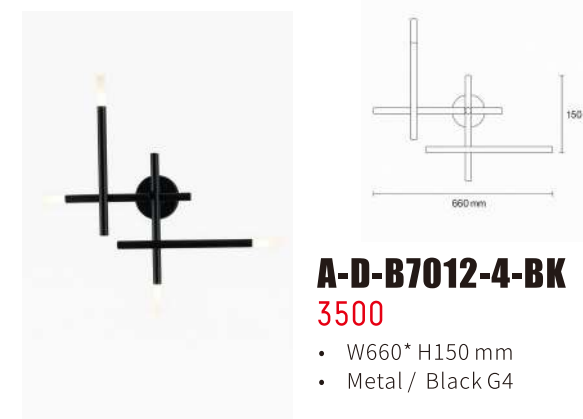

A-D-B7012-4-BK
3500

- W660* H150 mm
- Metal / Black G4

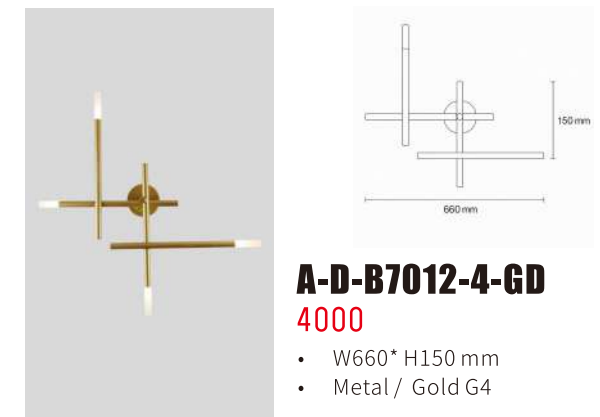

A-D-B7012-4-GD
4000

- W660* H150 mm
- Metal / Gold G4





A-D-B7048-1
2600

- W180* L360* H 250mm
- Metal / Black
- E27




A-D-B7018-1
2800

- D140* W300* L180 mm
- Acrylic / Black E27*1

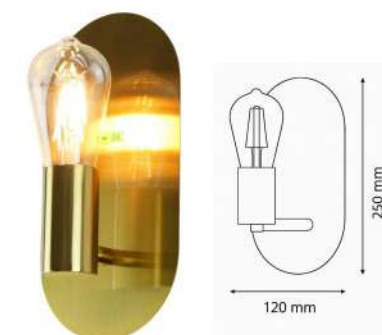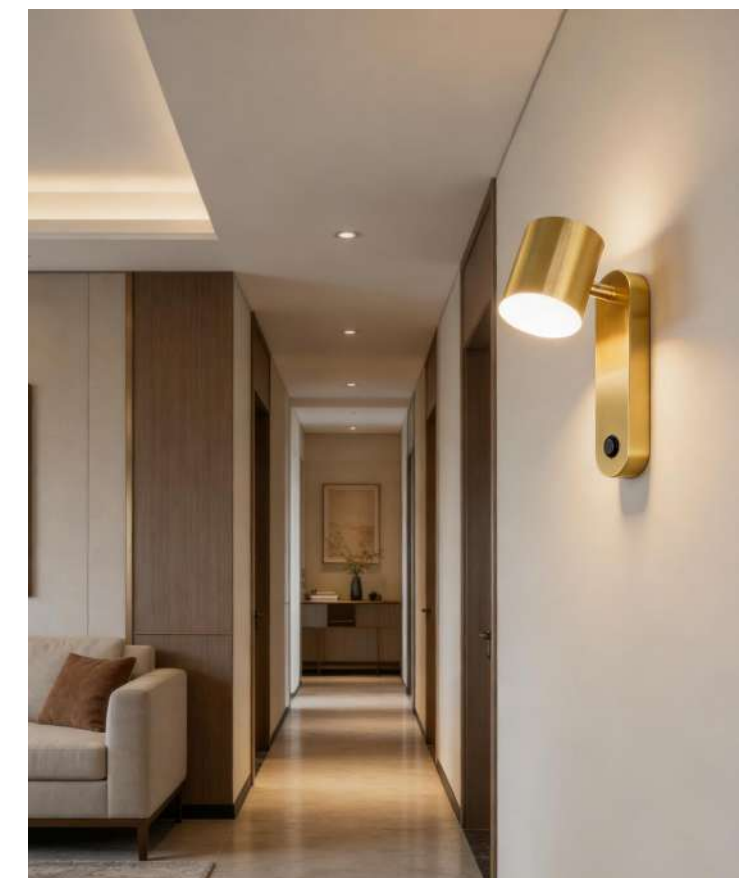


A-D-B7017-1
2600

- W120 MM*L 250 MM* H110 MM.
- Metal / Gold E27*1

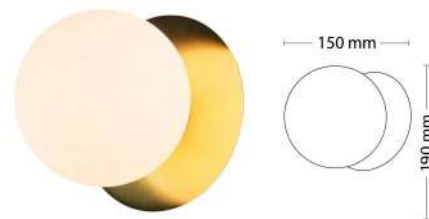

A-D-B6756-1B
1800

- W150 MM* H 190 MM
- Metal&Glass / Gold G9

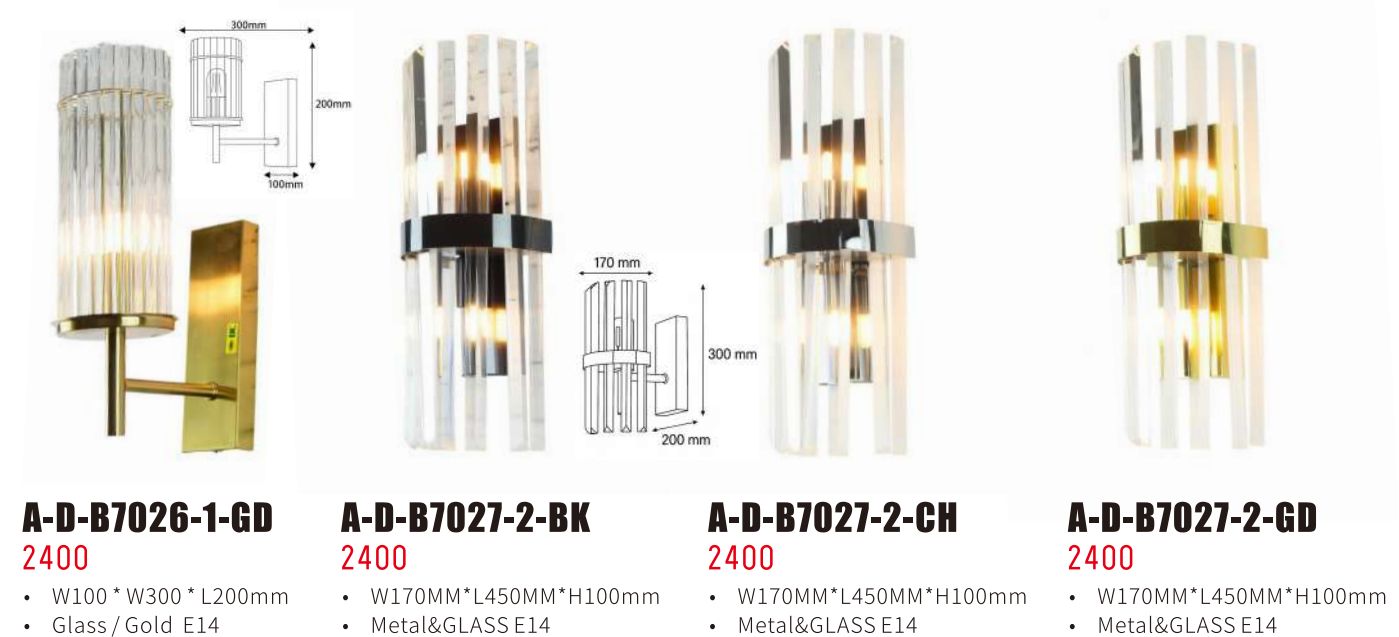




A-BD7077-1
2400

- W160* L400* H 210mm
- Metal / Gold G9




A-D-B7029-1-GD
1200

- W150 *L330 *H380mm
- Metal / Gold G9

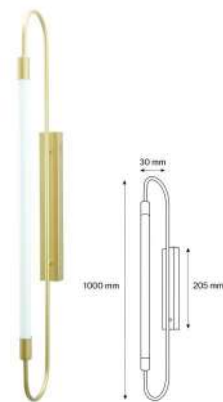


A-D-B7030-1-GD
5200

- W 30* L000 * H205mm
- Metal / Gold LED

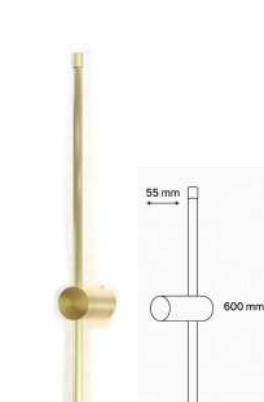

A-D-B7031-1-GD
1500

- W 55* L600 * H100 mm
- Metal / Gold LED

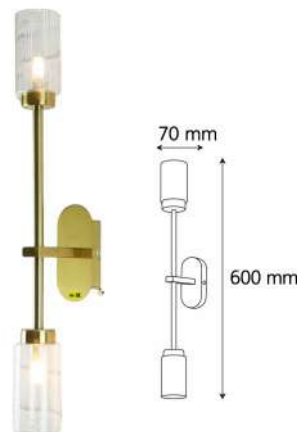


A-D-B7020-2
1600

- W 70 * L 600 * H 150 mm
- Metal / Gold
- G9




A-D-B7020-4
3200

- W 70 * L 700 * H 130 mm
- Metal/ Gold
- G9

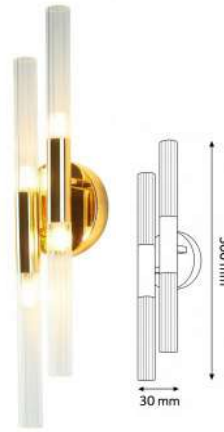

A-D-B7022-4-GD
4200

- W 100 * L 500 * H 90 mm
- Metal / Gold
- G9

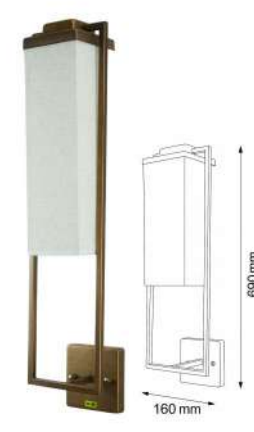

A-D-B7096-1
3200

- W160* L690* H 180 mm
- Metal / Gold
- E27



A-D-B7039-1
3200

- W 250* L350* H320mm
- Glass E27



A-D-B7043-1-BK
6000

- W 130* L280* H150mm
- Metal / Black E14




A-D-B7047-2
1900

- W 220* L130* H140mm
- Metal/ Black E14



A-D-B8039-1
16800

- W140* L330* H200 mm
- Brass& Metal /Gold
- G9

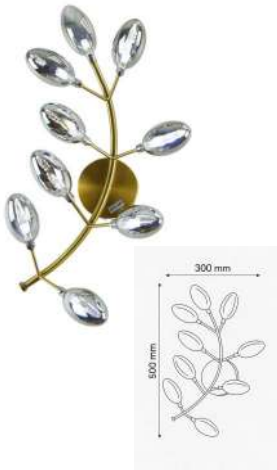


A-D-DY202-9L
3800

- W300* L500* H140mm
- Metal / Gold
- G4



A-D-GM-3028B-1-T-M
5400

- W200* L400* H270 mm
- Glass / Gold
- LED

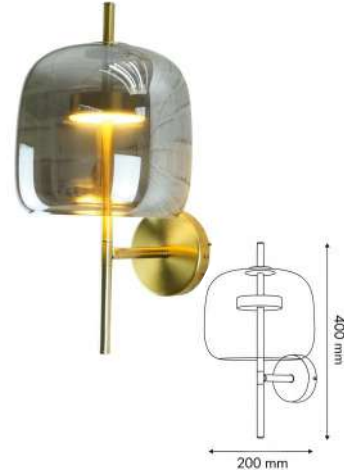

A-D-GM-3028B-1-Y-H
5400

- W200* L400* H270 mm
- Glass / Gold
- LED



A-D-B7043-3-BK
17400

- W 130* L830* H150mm
- Metal / Black E14




A-D-B7043-2-BK
11600

- W 130* L560* H150mm
- Metal / Black E14



A-D-B7049-1
5600

- Wood / Black
- E27

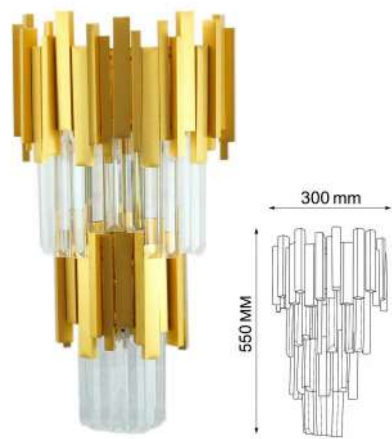

A-D-X1001-1
2400

- W300* L550* H180mm
- Metal/ Gold
- E14




A-D-X1002-1
2000

- W150* L300 mm
- Metal/ Black
- E27




A-D-X1002-2
2800

- W90 * L460 * H150 mm
- Metal&GLASS
- E27

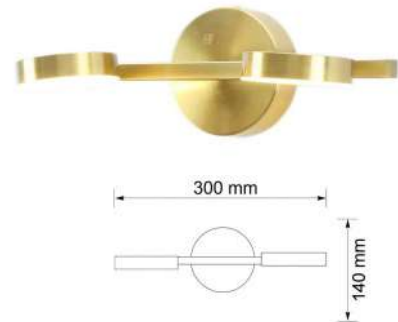


A-D-JQ8031-2
2800

- L300* H140mm
- Metal/ Gold
- LED

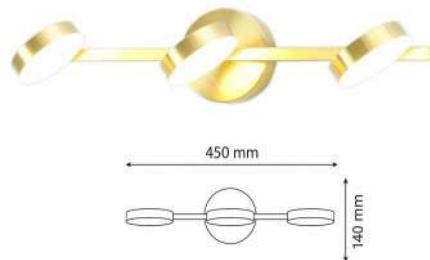


A-D-JQ8031-3
3400

- L450* H140mm
- Metal/ Gold
- LED

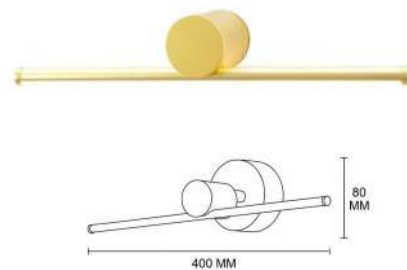

A-D-JQ8032-8
2400

- L400* H80mm
- Metal/ Gold
- LED

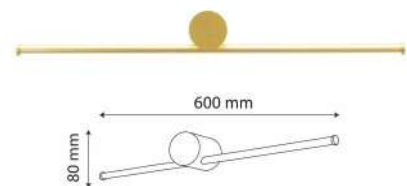

A-D-JQ8032-12
2800

- L600* H80mm
- Metal/ Gold
- LED




A-D230529-BK
5000

- W125*L650*H200mm
- Metal LED 14 W



A-D230529-SN
5000

- W125*L650*H200mm
- Metal LED 14 W



250524G



3500 3800

- W50*L630mm
- W50*L840mm
- Metal&Acrylic LED




A-D250521A
8400 10000

- W400*L750*H550mm
- W600*L1400*H900mm
- Metal&Glass G9

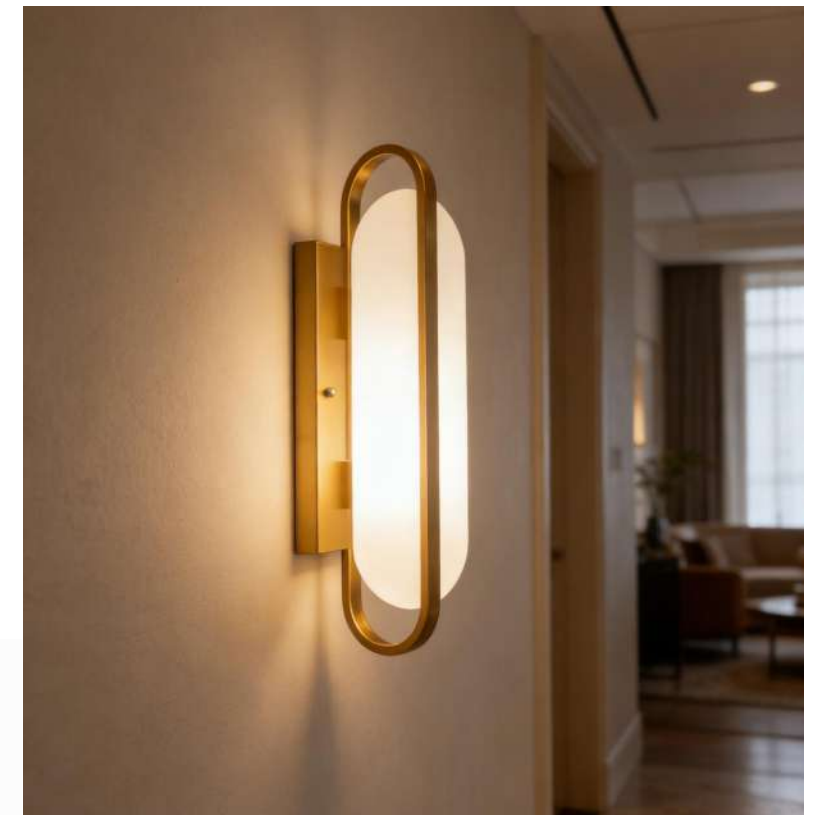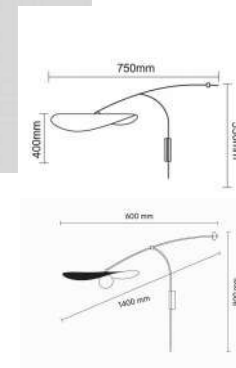


A-D231124F
7200

- W130*H600mm
- Metal & Glass E14*2

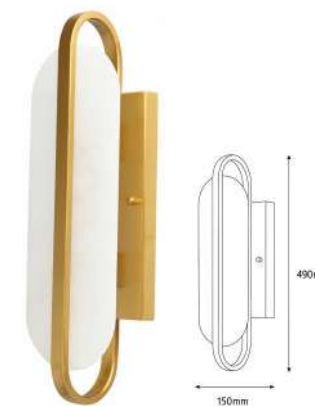

A-D241002A-2-GD
4400

- W150*L490*H100 mm
- Metal&Marble G9

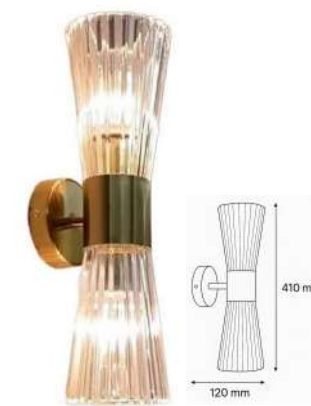

A-D241030D
4000

- W120*L410
- Metal & Glass E14



A-D250506Q
4800

- W120*H450mm
- Metal & Glass G9



A-D241016C
5400

- หน้ากว้าง 200mm.
- Metal & Mirror LED 8W



A-D241108A-BK
1380

- W100*L250mm
- Metal G9



A-D250813A
2500

- L300mm
- Metal LED12W




A-D250621C
1980



A-D250716A
980

- W125*L170*H230mm
- Metal&Wood E27

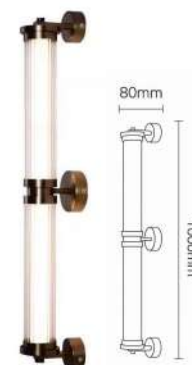

A-D250806E
10920

- W80*H1000mm
- Metal&Acrylic LED12W



A-D-B6757-GD
2200

- W55*L155*H45mm
- Metal LED3w



A-D250507B
2600

- W100*L300MM.
- Metal&Glass E27*2




A-D250325A-GD
2200

- W70*L420MM
- Metal&Acrylic E27*2



A-D250512A-BK
1140

- W210*H190 MM
- Metal&Glass G9*1

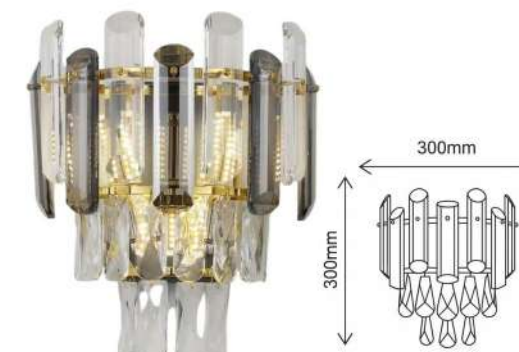

A-D240514D
3800

- W300*H300 mm
- Metal&Glass E14



A-D241030C
5400

- W230*L500mm
- Metal&Glass E14



A-D250524C
5000

- W250*H420 mm
- Metal&Glass E14



A-D-BX6082-600GD
A-D-BX6082-800GD

- W180* L600* H 240 mm
- W180* L1000* H240 mm
- Brass& Metal / Gold
- E14




A-D250621D
2800




A-D250808B
7000



250217D
9000
• W450*L450*H260 mm
• Metal&Glass E27



250305C
4400
• W230*L230*H350 mm
• Metal&Glass E27



250305D
4600
• W230*H600 mm
• Metal E27




250506E
9600
• W400*H580 mm
• Marble&Glass LED




250506G
9600
• W300*H500 mm
• Metal&Resin LED



250506H
4800
• H400 mm
• Resin&Glass LED



250506L
5500
• H400 mm
• Metal LED



250521B **8580**
• Dia.240*H250 mm
• Metal&Glass LED




250521C **4600**
• Metal&Glass E27



250506B
9000
• W450*H720 mm
• Cristal&fabric E27



250506C
9600
• W380*H620 mm
• Marble&Leather LED



250506D
9800
• W440*H420 mm
• Metal&Glass LED



250519D
4200
• W400*L400*H140 mm
• Metal LED



250521F **11800**
• Metal&Glass E27



250521G **5800**
• Metal&Glass E27





A-C240604C-800 15360



250218L
1980



A-C-5027A-1-WH
3600

- W 120 * H 340 mm
- Metal&GLASS / Black
- LED



A-C-5027A-BK
3600

- W 120 * H 340 mm
- Metal&GLASS / Black
- LED



A-C18157-2
3100

- ลูกเล็ก:100 ลูกใหญ่:130
- W:250 H:1200
- Metal /Black
- G9



A-C240612A-G9-25 25000



A-C241022B 116000

A-C240618A-6-GD
27600
20+40+60+80+100+120mm

A-C240618A-6-RG
27600
20+40+60+80+100+120mm




A-C250113A 58000



A-C-18123-1B
1400

- W 200 * L 1000 * H 480 mm
- Metal /Gold
- G9

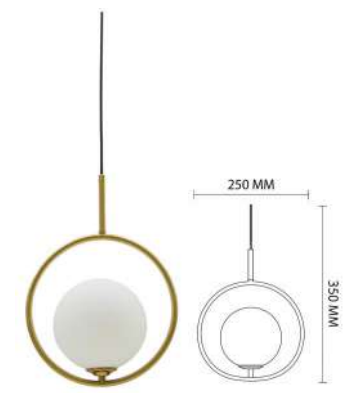

A-C-18123-1-GD
1400

- W250 * H 350 mm
- Metal /Gold
- G9




A-C18123-2B-GD
1800

- W200 * H 570 mm
- Metal /Gold
- G9



A-C-8018-6
16400

- D200 * W 20 * L 300 mm
- Metal / Silver
- LED

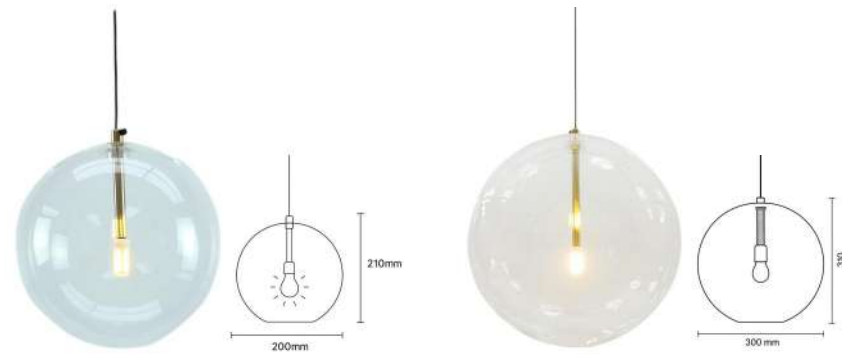

A-C-18170-1-200
1200

- W 200 H 210 mm
- Glass / Gold
- G4

A-C-18170-1-300
2500

- W 300 * H 310 mm
- Glass / Gold
- G4



A-C18331-1BK
1580


- W50 *H 440 mm
- Acrylic / Black
- LED

A-C18331-1GY
1580

- W50 *H 440 mm
- Acrylic / Black
- LED

A-C-18331-1-WH
1580

- W50 *H 440 mm
- Acrylic / Black
- LED

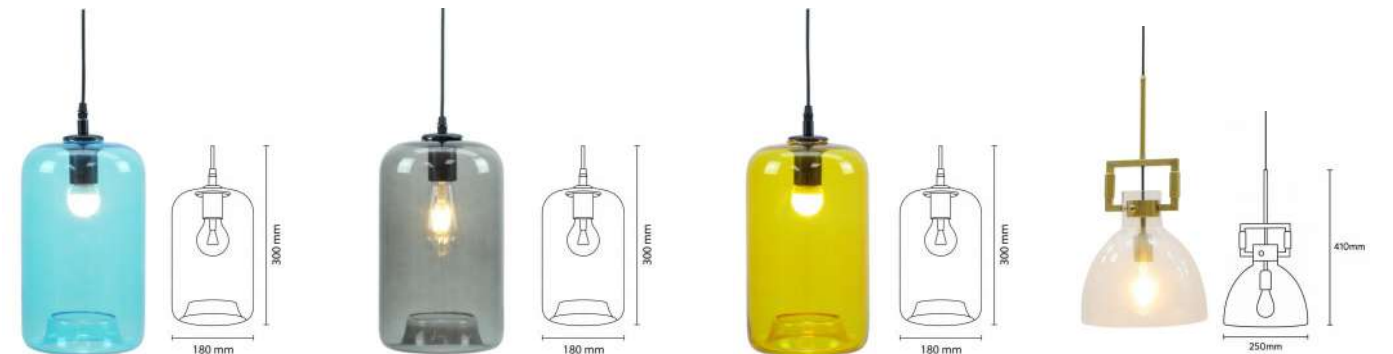

A-C-1911-1-BL
1800

- W180* L300 mm
- Acrylic / Blue
- E27

A-C1911-1-GY
1800

- W180* L300 mm
- Acrylic / Blue
- E27

A-C-1911-1-YW
1800

- W180* L300 mm
- Acrylic / Blue
- E27

A-C-18290-1A
4200

- W250*H410 mm
- Metal
- E27



A-C-18689-1
7600

- W90 H 290 mm
- Metal
- E27



A-C-18691-1-BK
1800

- W30 * L 360 mm
- Metal / Black
- LED



A-C-18168-4
3600

- W300 * H 330 mm
- Metal&Acrylic / blk&white
- G9



A-C18290-1B
4200

- W250*H500 mm
- Metal&Acrylic/Gold
- E27



A-C-18290-1C
4200

- W250*H540 mm
- Metal&Acrylic/Gold
- E27



A-C-18690-1A
5200

- W 270*H 230 mm
- Glass / Light Brown
- E27



A-C-18690-1B
4000

- W190*H400 mm
- Glass / Light Brown
- E27



A-C-18690-1C
5200

- W180*H250 mm
- Glass / Black&White
- E27



A-C-18696-1A
6000

- W200*H 600 mm
- Glass / Light Brown
- E27



A-C-18696-1B
4000

- W170*H 250 mm
- Glass / Light Brown
- E27



A-GM-3049H-A
3200

- W 300 * H 250 mm
- Glass / Gray
- LED



A-GM-3049H-B
2600

- W 160 * H 250 mm
- Glass / Gray
- LED




A-GM-3049H-C
2600

- W 170 * H 250 mm
- Glass / Gray
- LED



A-GM-3049H-D
2600

- W 300 * H 150 mm
- Glass / Black
- LED

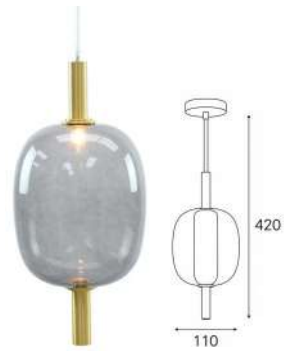

A-C18706-1A
5000

- W 250*H 600 mm
- Glass / Gray
- E14




A-C18706-1B
5000

- W 250*H 600 mm
- Glass / Gray
- E14



A-C18706-1C
5000

- W 250*H 600 mm
- Glass / Gray
- E14

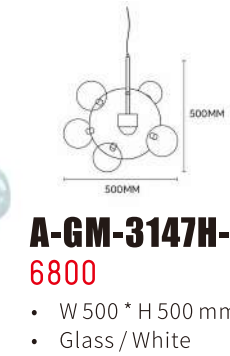

A-GM-3147H-6
6800

- W 500 * H 500 mm
- Glass / White



A-JH-5902-1A
2400

- W230 *H270 mm
- Wood
- E27



A-JH-5902-1B
2200

- W230 *H270 mm
- Wood
- E27



A-C-18705-4
7700

- W180* H200 mm
- Glass / Black&Pink&Yellow
- E27



A-JH-5902-1C
1800

- W150 * H270 mm
- Wood
- E27



A-JH-5902-1D
1800

- W100 *H220 mm
- Wood
- E27



A-C-18712-48
56000

- W970 * H160 mm
- Metal / Gold
- E14




A-C19147-6-BK
13800

- W500 * L 1200 * H300 mm
- Metal / Gold
- G9



A-C-88349-600
19800 30000

- W600 * H240 mm
- W800 * H240 mm
- Metal&Clear glass / Pink Gold
- E14




C-T6908-1
7800

- W 500 * H 300 mm
- Metal&GLASS / Gold
- E14




C-ZT0009-1
3800

- W 230 * H 230 mm
- Metal&GLASS / Black
- LED

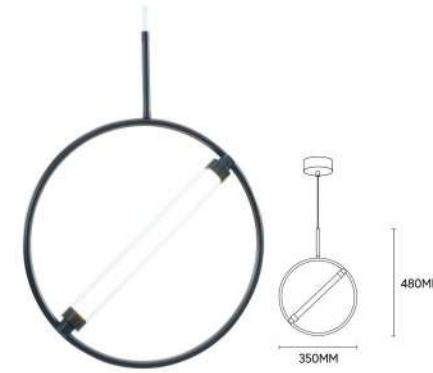


C-ZT142-350-BK
4000

- W 350 * H 480 mm
- Metal / Black
- LED

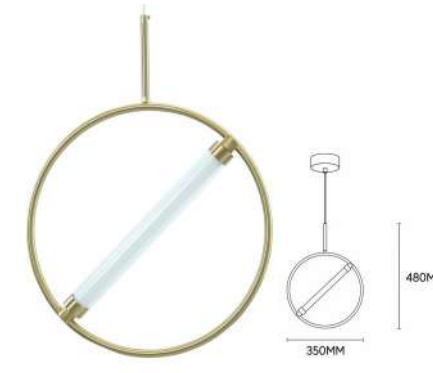

C-ZT142-350-GD
4000

- W 350 * H 480 mm
- Metal / Black
- LED

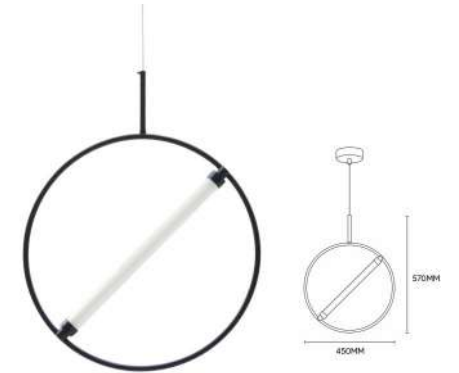

C-ZT142-450
4800

- W 450 * H 570 mm
- Metal / Black
- LED




DC-852
3400

- วงเล็ก: 400-80mm
- วงกลาง: 600-80mm
- วงใหญ่: 800-80mm
- Metal / Gold
- LED



DC-19426-5
14000

- W 400 * H 800 mm
- Metal / Gold
- LED



DC-BX-D6028-400
17000

- W 400 * H 500 mm
- Metal&Clear glass / Gold
- E14



DC-BX-D6031-350
10400

- W 330 * H 400 mm
- Metal&Clear glass / Gold
- E14





A-C-18707-2
3400

- W110 * H420 mm
- Metal / Pink Gold
- LED



A-C-18707-3
4400

- W110 * H600 mm
- Metal / Pink Gold
- LED




A-C-18710-1
2400

- W150 * L350 mm
- Glass
- G4



A-C-18716-1
2300

- W230 * L460 mm
- Metal / Black
- E27

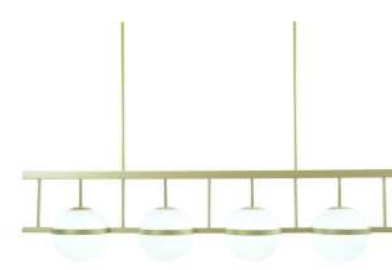

A-C-18717-4-GD
10000

- D400 * W 850 * L 270 mm
- Metal / Glold
- E27



A-C-19143-1
6000

- W 800 * H500 mm
- Metal&GLASS / Gold
- E27



A-C-18711-1A
4800

- W80 * L180 mm
- Metal / Gold
- E14




A-C-18711-1B
4800

- W250 * L200 mm
- Metal / Gold
- E14



A-C-18711-1C
4200

- W280 * L200 mm
- Metal / Gold
- E14

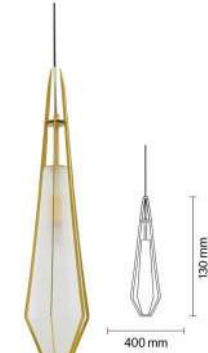

A-C-18711-1D
5600

- W400 * H130 mm
- Metal / Gold
- E14



A-C-18750-4GD
7600

- W300 * H500 mm
- Glass / Gold
- E14



A-C-18753-1GD
2400

- W220 * H 440 mm
- Metal&GLASS /Gold
- G9



A-C-19140-1
1800

- W200 * H880 mm
- Metal / Gold
- E27



A-C-19146-3
3600

- W140 * H730 mm
- Metal / Black
- G9




A-C-18708-7
12000

- H3000mm
- Glass / Black
- LED



A-C-18756-4
11200

- W180 * L 780 mm
- Metal /Silver
- LED

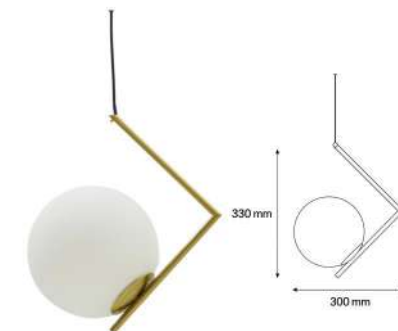

A-C-19145-1
1780

- W300 * H 330 mm
- Metal / Gold
- E27



A-C19417-6

13000


- W600*H900 mm
- Metal / Black
- G9



A-C-19428-8

23000

- W1000*H1050 mm
- Metal&GLASS / Gold
- G4

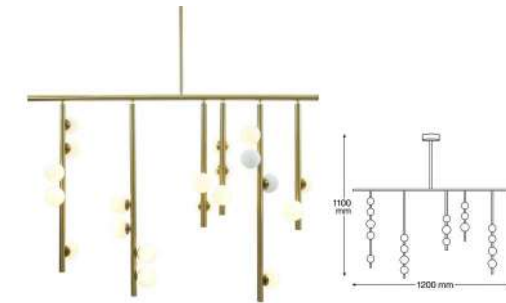

A-C-19430-20

24000

- W1200 * H 1100 mm
- Metal / Gold
- G9



A-C-250708B


3200



A-C-18276-3A

5800


- W 1300 * H 1100 mm
- Metal&GLASS / Black
- G9

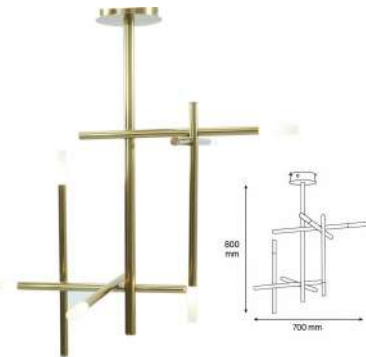

A-C-19413-6

12000

- W700*H800 mm
- Metal / Gold
- G4

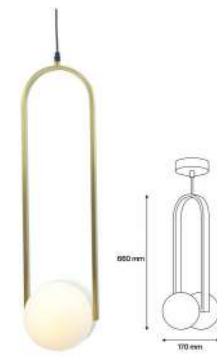

A-C-19415-1

3200

- W170*H660 mm
- Metal / Gold
- G9



A-C-19416-10

28000

- W40*H620 mm
- Metal / Gold
- LED



A-C-19431-5

12400


- W1300 * H850 mm
- Metal&GLASS / Black
- E14



A-C-19435-5-BK

5800


- W 70 * H1200 mm
- Metal / Black
- Gu10

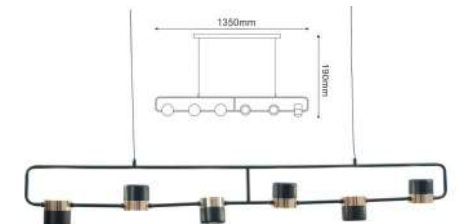

A-C-D39-6L

17000

- D80 * W 190 * L 1350 mm
- Metal / Black
- LED

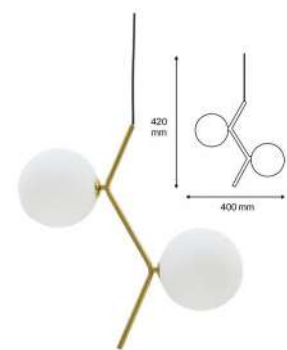

A-C-19427-2

2200


- W400* H420 mm
- Metal / Gold
- G9



A-C19429-1

2600


- W200*H 380 mm
- Glass
- E27

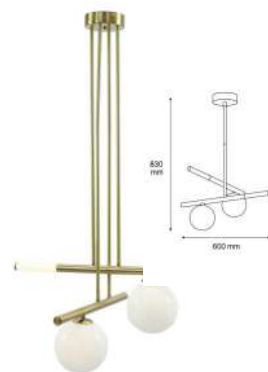

A-C-19436-4

7900

- W600*H830 mm
- Metal / Gold
- G9

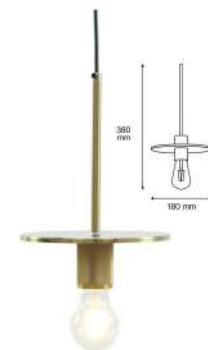

A-C-19449-1

1580

- W180 * H380 mm
- Metal / Gold
- E27






A-C-6883-1000
38000

- W290 * L 1000 * H 800 mm
- Metal&GLASS Black
- E27



A-C-18718-4+6
33000

- D400 * W 850 * L 270 mm
- Metal / Gold
- E27

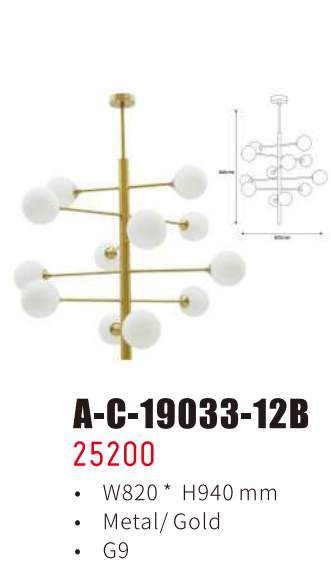

A-C-19033-12B
25200

- W820 * H940 mm
- Metal / Gold
- G9



A-C-19418-8
16800

- W1000 * H1200mm
- Metal / Gold
- LED




A-C19437-19
39000

- L1080 * H 780 mm
- Metal / Gold
- G9



DC-JH-7019-7
23040

- W 700 * L 1000 * H 200 mm
- Metal&Clear glass /Gold
- E14

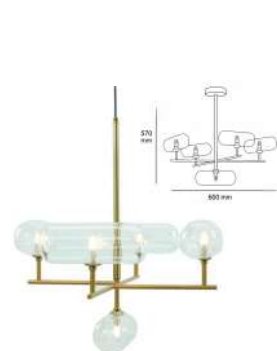


A-C-19421-5
19600

- W600 * H570 mm
- Metal / Gold
- G9




A-C-19422-8
15800

- W 950 * H 340 mm
- Metal / Gold
- G9

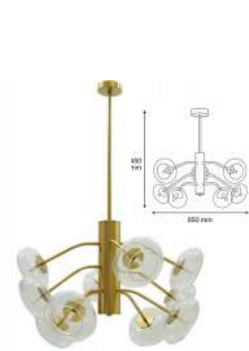

A-C-19425-10
19600

- W 650 * H 450 mm
- Metal / Gold
- G4

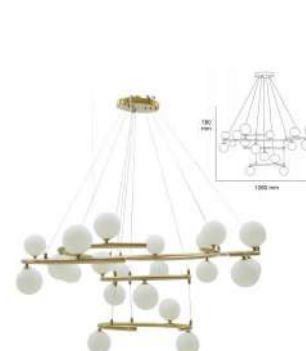

A-C-19437-19
39000

- L 1080 * H 780 mm
- Metal / Gold
- G9




C-ZT082-6
90000

- W1000 * H 1290 mm
- Metal+Glass/White&Gold
- E14




DC-1155-800-1300
94000

- W800*H1300 mm
- Metal / Gold
- E14X32

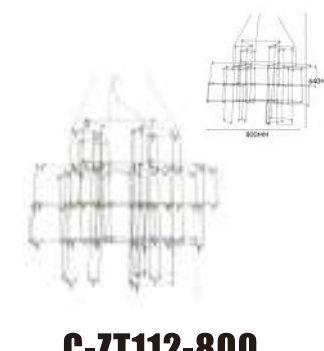

C-ZT112-800
38000

- W800 * H640 mm
- Metal / Silver
- E14

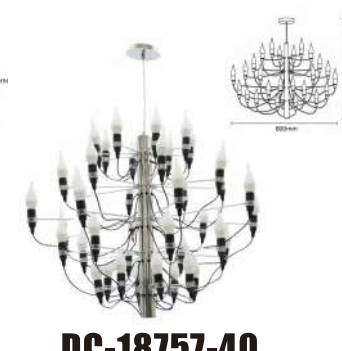

DC-18757-40
29800

- W800 * H600 mm
- Metal / Black
- E14



A-C-19400-8-5
25000

- W520*H250mm / W820*H250 mm
- Metal&GLASS / PinkGold
- E14



A-C-19419-6
12000

- W600 * H400 mm
- Metal / Black
- E27



A-C-19147-6
13800

- W600 * H400 mm
- Metal / Black
- E27




A-DC-ZT069-600
11800

- W600 * H800 mm
- Metal&Clear glass / Gold
- LED




DC-ZT0018-12
90000

- W510 * L900 * H 530 mm
- Glass / Gold
- LED

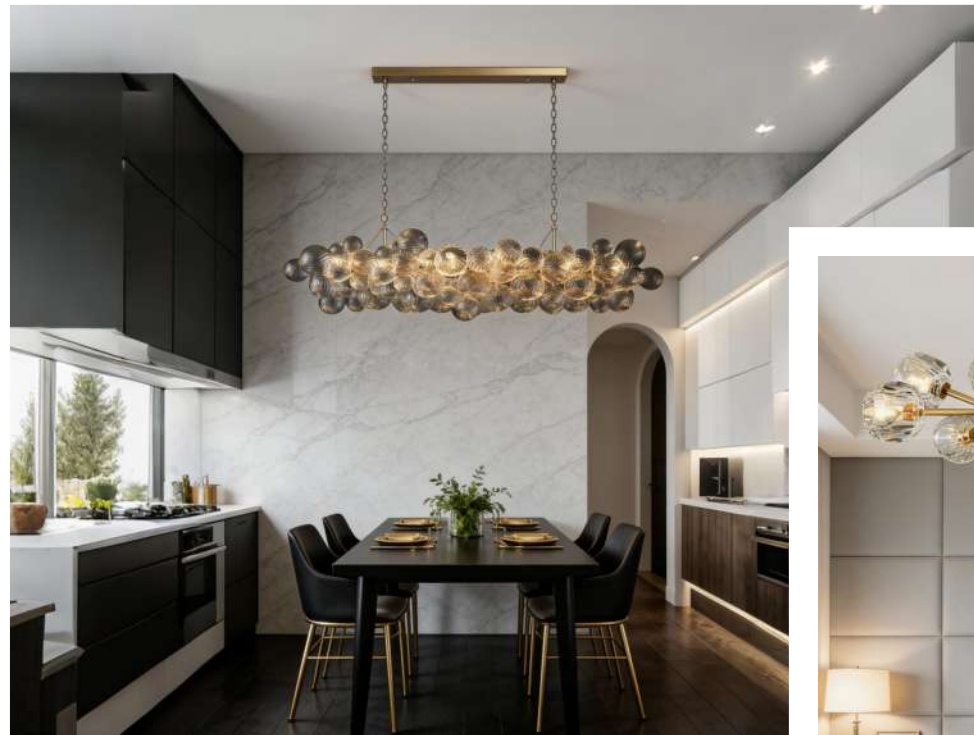

250304E
351000

- Metal & Glass
- G4



250327A
18600

- H1000mm
- Metal & Pendant
- E27




250113C
63000

- H 1600mm
- Metal&Glass
- E27*8



250218P
13300

- W1300*L1200 mm
- Metal&Acrylic
- LED



250219K
31800

- Metal & crystal
- G4*16




250304A
54000

- W1000 * L1400 mm
- Metal & Glass
- LED



250308J
15800

- W600 * L400mm
- Metal & Acrylic
- G9



250327A
18600

- W1500 * 3000mm
- Metal&Glass
- E27




250428FA
48000 34000

- W400 * L1450
- Metal&Acrylic
- LED



250506F
9600


- W600*H550mm
- Metal&GLASS
- E14



250219H

28000 23800 20200 15800 18600 10400


- 2.2m / 2m / 1.8m / 1.5m / 1.2m / 1m
- 72w / 68w / 62w / 52w / 43w / 36w
- Metal & Acrylic
- LED



250301A

2400 2700 3200


- มี3ขนาด (150) (200) (250)
- Acrylic & resin / white
- E27



250522

23800


- W875*L510
- Metal&Glass



250301C

4400 3400

- มี3ขนาด (600) (400)
- Metal&Fabric
- E27



250609A

10500


- W600*L400*H1500mm
- Metal
- LED



250604A

10500


- H800mm
- Metal&Fabric
- E14



250516C

2100 2760 6400



- 300*200*150 / 400*230*160 / 800*350*280
- Fabric
- E27



250506P

44000

- W600*500mm
- Metal & Glass fiber
- E14

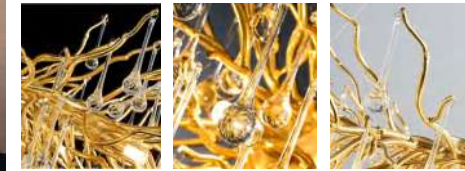

250618E

28000


- 120*60*50cm
- Metal & Glass
- G9



250722E

129000



- 900*300mm
- Metal&Glass
- G9



250620A

32000


- W1100*L950mm
- Glass
- E14

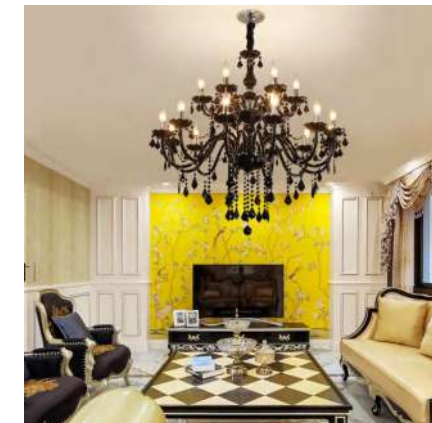

250620B

25800


- Glass
- E14



250701A

80500


- Metal&GLASS
- G9



250705G

99000

- w400*L1700*H650mm
- Metal&Glass
- G9




250722C

32400

- 800*350mm
- Glass
- E14



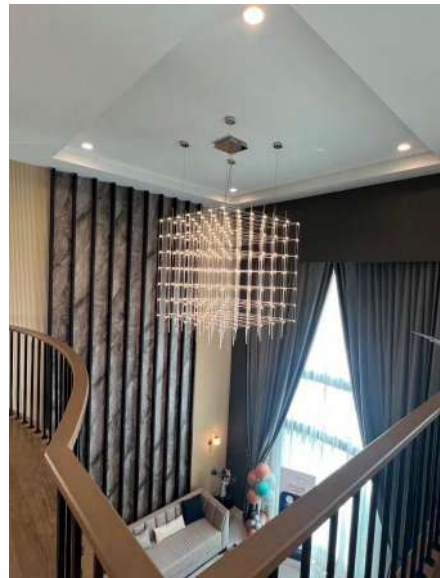

A-C230926M



A-C240327A.1



A-C240327A



A-C250617A



A-C240510A



A-C250530A




A-C240511C



A-C241213E



A-C250301U



A-C220920A

ST-0426-3W-A
3 W [GRAY]


990

3^W

Color temperature
3000K

Dimension
86 universal bottom box

Input voltage: AC85 * 265



ST-0426-3W-B
3 W [GRAY]


990

3^W

Color temperature
3000K

Dimension
86 universal bottom box

Input voltage: AC85 * 265



ST-0426-3W-C
3 W [GRAY]

990

3^W

Color temperature
3000K

Dimension
86 universal bottom box

Input voltage: AC85 * 265



ST-0426-3W-D
3 W [BLACK]

990

3^W

Color temperature
3000K

Dimension
86 universal bottom box

Input voltage: AC85 * 265



ST-0426-3W-E
3 W [BODY RESPONSE]


970

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-A
5 W [BODY RESPONSE]

1380

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-B
5 W [BODY RESPONSE]

1380

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-C
3-5 W [BODY RESPONSE]

1335

3-5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-D
5 W [BODY RESPONSE]

1380

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-E

5 W [BODY RESPONSE]

1380



ST-0426-5W-F

5 W [BODY RESPONSE]

1840



ST-0426-3W-F

3 W [BODY RESPONSE]

1380



ST-0426-3W-L

3 W [BLACK]

645



ST-0426-3W-M

3 W [BLACK]

645



ST-0426-5W-J

5 W [BLACK]

1035



ST-0426-3W-G

3 W [BODY RESPONSE]

1380



ST-0426-5W-G

5 W [BODY RESPONSE]

1315



ST-0426-5W-H

5 W [BODY RESPONSE]


1380



ST-0426-5W-K

5 W [BLACK]

875

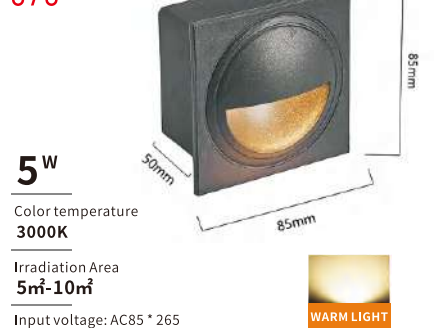

ST-0426-5W-L

5 W [BLACK]

1035



ST-0426-5W-M

5 W [BLACK]

1335



ST-0426-3W-H

3 W [BODY RESPONSE]

1380



ST-0426-3W-J

3 W [BODY RESPONSE]

1430



ST-0426-3W-K

3 W [BODY RESPONSE]

1380



ST-0426-3W-N

3 W [BLACK]

690



ST-0426-3W-P

3 W [BLACK]

690



ST-0426-5W-N

3-5 W [BLACK]

970



ST-0426-3W-Q
3 W [BLACK]

690


3^W

Color temperat
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
50*60



ST-0426-3W-R
3 W [BLACK]

690


3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
68*68*48



ST-0426-5W-P
5 W [BLACK]

970


5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
105*50



ST-0426-3W-Y
3 W [BLACK]

990


3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
97*50*52



ST-0426-5W-C
5 W [BLACK]

1035

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
162*60*50



ST-0426-5W-R
5 W [BLACK]

1105

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
202*58*60



ST-0426-3W-S
3 W [BLACK]

LEFT

690

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
45*48*46



ST-0426-3W-T
3 W [BLACK]

RIGHT

690


3^W

Color temperatur
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
48*48*46



ST-0426-3W-U
3 W [BLACK]

600


3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
48*48*46



ST-0426-10W-A
5-10 W [BLACK]

Iron alloy embedded parts

1495


5-10^W

Color temperature
3000K

Hole size
270*50*45mm

Input voltage: AC85 * 265

Hole size
97*50*50



ST-0426-3W-Z
3 W [BLACK]

670


3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
97*50*50



ST-0426-5W-S
5 W [BLACK]

970


5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
104*104*65



ST-0426-3W-V
3 W [BLACK]

LEFT

740

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
68*68*48



ST-0426-3W-W
3 W [BLACK]

RIGHT

740


3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
65*65



ST-0426-3W-X
3 W [BLACK]

670


3-5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
50*50



ST-0426-3W-AA
3 W [BLACK]

805


3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
136*68*53



ST-0426-5W-T
5 W [BLACK]

970


5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
153*94*56



ST-0426-3W-AB
3 W [BLACK]

920

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
202*68*20



ST-0426-3W-AC
3 W [BLACK]

920

3^W

Color temperature
3000K

Dimension
86 universal bottom box

Input voltage: AC85 * 265



ST-0426-3W-AD
3 W [BLACK]

920

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-U
5 W [BLACK]


575

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-15W-A
15 W [BLACK]

2760

15^W

Color temperature
3000K

Hole size
216*232*56mm

Input voltage: AC85 * 265



ST-0426-10W-C
10 W [BLACK]

1840

10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-10W-D
10 W [BLACK]

1380

10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-AE
3 W [BLACK]

670

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-AF
3 W [NO PRE-BURIED]

740

3^W

Color temperatur
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-V
3-5 W [BLACK]


1105

3-5^W

Color temperature
3000K

Hole size
104*104*65mm

Input voltage: AC85 * 265



ST-0426-3W-AG
3 W [BLACK]


1035

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-AH
3 W [BLACK]


1085

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-AJ
3 W [BLACK]


690

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-10W-B
10 W [BLACK]


1380

10^W

Color temperature
3000K

Hole size
148*148*56mm

Input voltage: AC85 * 265



ST-0426-12W-A
12 W [BLACK]


1955

12^W

Color temperature
3000K

Hole size
202*202*56mm

Input voltage: AC85 * 265



ST-0426-15W-B
15 W [BLACK]


2760

15^W

Color temperature
3000K

Hole size
216*232*56mm

Input voltage: AC85 * 265



ST-0426-3W-AK
3 W [BLACK]

920

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-W
5 W [BLACK]


805

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-X
5 W [BLACK]

805

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-Y
5 W [BLACK]

875

5^W

Color temperature
3000K

Hole size
162*60*50mm

Input voltage: AC85 * 265

No steps



ST-0426-5W-Z
5 W [BLACK]

920


5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
188*70*50



ST-0426-5W-AA
5 W [BLACK]

875


5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
162*60*50



ST-0426-10W-F
10 W [BLACK]

1495


10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
250*68*58



ST-0426-5W-AG
5 W [BLACK]

1265

5^W

Color temperature
3000K

Hole size
202*58*60mm

Input voltage: AC85 * 265

No steps



ST-0426-10W-G
10 W [BLACK]

1495

10^W

Color temperature
3000K

Hole size
207*112*58mm

Input voltage: AC85 * 265

No steps



ST-0426-5W-AB
5 W [BLACK]

875


5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
160*70*50



ST-0426-5W-AC
5 W [BLACK]

1105


5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
188*75*60



ST-0426-5W-AD
5 W [BLACK]

1035


5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
202*58*60



ST-0426-10W-H
10 W [BLACK]

1495


10^W

Color temperature
3000K

Hole size
207*56*45mm

Input voltage: AC85 * 265

No steps



ST-0426-10W-J
10 W [BLACK]

1495


10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
240*80*58



ST-0426-10W-K
10 W [BLACK]

1565

10^W

Color temperature
3000K

Hole size
241*80*54mm

Input voltage: AC85 * 265

No steps



ST-0426-5W-AE
5 W [BLACK]

990


5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
202*58*60



ST-0426-5W-AF
5 W [BLACK]

1150


5^W

Color temperature
3000K

Hole size
188*70*50mm

Input voltage: AC85 * 265

No steps



ST-0426-10W-E
10 W [BLACK]

1495


10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
207*112*58



ST-0426-10W-L
10 W [BLACK]

1565


10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265

Hole size
250*68*58



ST-0426-10W-M
10 W [BLACK]

1725


10^W

Color temperature
3000K

Hole size
188*70*50mm

Input voltage: AC85 * 265

No steps



ST-0426-10W-N
10 W [BLACK]

1840


10^W

Color temperature
3000K

Hole size
300*87*52mm

Input voltage: AC85 * 265

There are steps



ST-0426-10W-P
10 W [BLACK]
1840



ST-0426-15W-C
15 W [BLACK]
2070



ST-0426-15W-D
15 W [BLACK]
2070



ST-0426-3W-AM
3 W [BLACK]
690



ST-0426-3W-AN
3 W [BLACK]
690



ST-0426-3W-AP
3 W [BLACK]
875



ST-0426-3W-AK
3 W [BLACK]
805



ST-0426-3W-AL
3 W [BLACK]
875



ST-0426-5W-AH
5 W [BLACK]
970



ST-0426-3W-AQ
3 W [BLACK]
740



ST-0426-3W-AR
3 W [BLACK]
875



ST-0426-3W-AS
3 W [BLACK]
875



ST-0426-3W-AT
3 W [BLACK]
970



ST-0426-3W-AU
3 W [BLACK]
970



ST-0426-3W-AV
3 W [BLACK]
970



ST-0426-3W-AW
3 W [BLACK]

830

3^W

Color temperature
3000K

Hole size
83*83*26mm

Input voltage: AC85 * 265



ST-0426-3W-AX
3 W [BLACK]

920

3^W

Color temperature
3000K

Hole size
83*83*26mm

Input voltage: AC85 * 265



ST-0426-3W-AY
3 W [BLACK]


830

3^W

Color temperature
3000K

Hole size
83*83*26mm

Input voltage: AC85 * 265



ST-0426-10W-Q
10 W [BLACK]

1335

10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-8W-A
8 W [BLACK]

1565

8^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-8W-B
8 W [BLACK]


1565

8^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-AZ
3 W [BLACK]


920

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BA
3 W [BLACK]

920

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BB
3 W [BLACK]


920

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BE
3 W [BLACK]


830

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BF
3 W [BLACK]


970

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BG
3 W [BLACK]


920

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BC
3 W [BODY RESPONSE]


970

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-AJ
5 W [BLACK]

920

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BD
3 [BLACK]


1035

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BH
3 W [BLACK]


805

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BJ
3 W [BLACK]

875

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BK
3 W [BLACK]

875

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-AK
5 W [BLACK]

920

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-AL
5 W [BLACK]

920

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-AM
5 W [BLACK]


1035

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-4W-A
4 W [BLACK]


970

4^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-7W-A
7 W [BLACK]

1150

7^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-3W-BL
3 W [BLACK]

920

3^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-AN
5 W [BLACK]


1035

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-10W-R
10 W [BLACK]


1565

10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-10W-S
10 W [BLACK]


1565

10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-5W-AP
5 W [BLACK]


1035

5^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-6W-A
6 W [BLACK]

1105

6^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-10W-V
10 W [BLACK]

1335

10^W

Color temperature
3000K

Hole size
260*85*42mm

Input voltage: AC85 * 265



ST-0426-8W-C
8 W [BLACK]


1105

8^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-10W-T
10 W [BLACK]


1565

10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-10W-U
10 W [BLACK]


1660

10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265



ST-0426-10W-W
10 W [BLACK]

1565


10^W

Color temperature
3000K

Irradiation Area
5m²-10m²

Input voltage: AC85 * 265




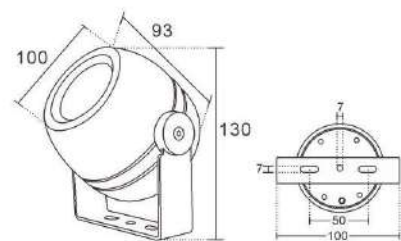

NO:YF-DOTG-01

10W 2120 15W 2255


Shell material: die cast aluminum
Product size: 100x93x130MM
Aluminum substrate size: 62MM
Power: COB 10-15W
Single grain 3/5x3W
Power box size: 80x35xH42MM

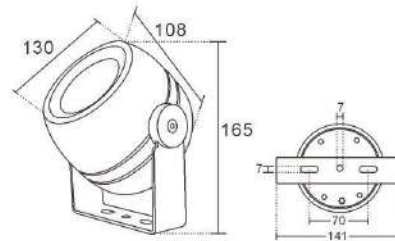

NO:YF-DOTG-02

15W 3335 20W 3680


Shell material: die cast aluminum
Product size: 130x108x165MM
Aluminum substrate size: 90MM
Power: COB 20-25W
Single grain 9/12x2W
Power box size: 94x55xH40MM

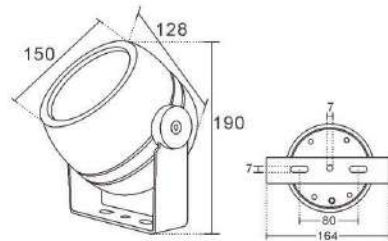

NO:YF-DOTG-03

30W 4025


Shell material: die cast aluminum
Product size: 150x128x190MM
Aluminum substrate size: 112MM
Power: COB 30W
Single grain 12x3W/18x1.5W
Power box size: 116x60xH40MM

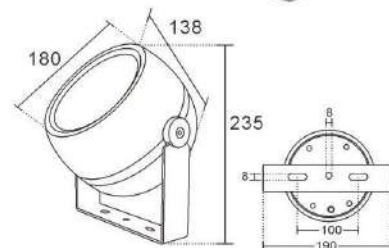

NO:YF-DOTG-04

40W 5060


Shell material: die cast aluminum
Product size: 180x138x235MM
Aluminum substrate size: 142MM
Power: COB 40W
Single grain 18x2W/24x1.5W
Power box size: 130x85xH45MM

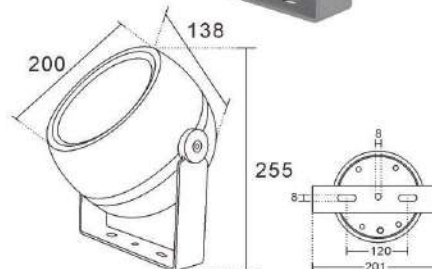

NO:YF-DOTG-05

48W 7130


Shell material: die cast aluminum
Product size: 200x138x255MM
Aluminum substrate size: 160MM
Power: COB 50W
Single grain 24x2W/36x1.5W
Power box size: 150x95xH45MM

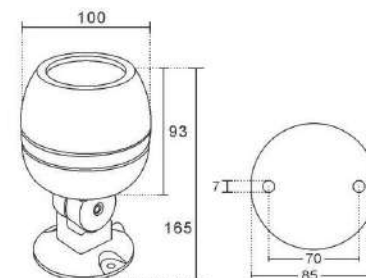

NO:YF-JBDZ-01

10W 2645 15W 2750


Shell material: die cast aluminum
Product size: 100x93x165MM
Aluminum substrate size: 62MM
Power: COB 10-15W
Single grain 3/5x3W
Power box size: 80x35xH42MM

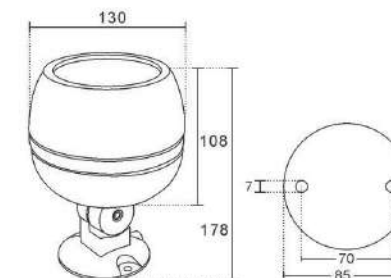

NO:YF-JBDZ-02

20W 3105 25W 3290


Shell material: die cast aluminum
Product size: 130x108x178MM
Aluminum substrate size: 90MM
Power: COB 20-25W
Single grain 9/12x2W
Power box size: 94x55xH40MM

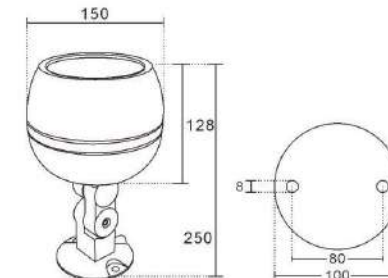

NO:YF-JBDZ-03

30W 4140


Shell material: die cast aluminum
Product size: 150x128x250MM
Aluminum substrate size: 112MM
Power: COB 30W
Single grain 12x3W/18x1.5W
Power box size: 116x60xH40MM

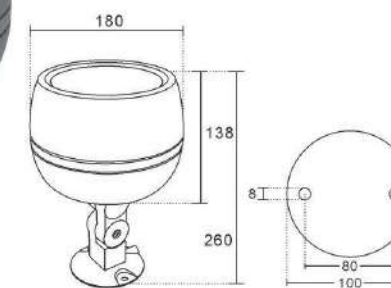

NO:YF-JBDZ-04

40W 5175

Shell material: die cast aluminum
Product size: 180x138x260MM
Aluminum substrate size: 142MM
Power: COB 40W
Single grain 18x2W/24x1.5W
Power box size: 130x85xH45MM

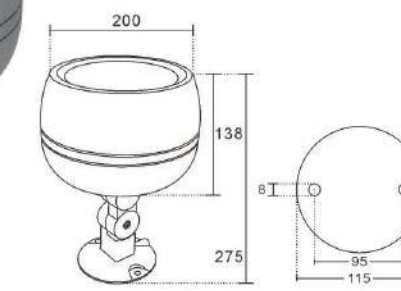


NO:YF-JBDZ-05

50W 6210


Shell material: die cast aluminum
Product size: 200x138x275MM
Aluminum substrate size: 160MM
Power: COB 50W
Single grain 24x2W/36x1.5W
Power box size: 150x95xH45MM





NO:YF-JBBG-01
10W 2645 15W 2760

Shell material: die cast aluminum
Product size: 100x93x70MM
Aluminum substrate size: 62MM
Power: COB 10-15W
Single grain 3/5x3W
Power box size: 80x35xH42MM




NO:YF-JBBG-02
20W 3565 25W 3750

Shell material: die cast aluminum
Product size: 130x108x70MM
Aluminum substrate size: 90MM
Power: COB 20-25W
Single grain 9/12x2W
Power box size: 94x55xH40MM




NO:YF-JBBG-03
30W 4600

Shell material: die cast aluminum
Product size: 150x128x110MM
Aluminum substrate size: 112MM
Power: COB 30W
Single grain 12x3W/18x1.5W
Power box size: 116x60xH40MM




NO:YF-JBBG-11
10W 2645 15W 2760

Shell material: die cast aluminum
Product size: 100x93x130MM
Aluminum substrate size: 62MM
Power: COB 10-15W
Single grain 3/5x3W
Power box size: 80x35xH42MM




NO:YF-JBBG-12
20W 3680 25W 3860

Shell material: die cast aluminum
Product size: 130x108x130MM
Aluminum substrate size: 90MM
Power: COB 20-25W
Single grain 9/12x2W
Power box size: 94x55xH40MM




NO:YF-JBBG-13
30W 4715

Shell material: die cast aluminum
Product size: 150x128x170MM
Aluminum substrate size: 112MM
Power: COB 30W
Single grain 12x3W/18x1.5W
Power box size: 116x60xH40MM




NO:YF-JBBG-14
40W 5750

Shell material: die cast aluminum
Product size: 180x138x190MM
Aluminum substrate size: 142MM
Power: COB 40W
Single grain 18x2W/24x1.5W
Power box size: 130x85xH45MM



NO:YF-JBBG-15
50W 6785

Shell material: die cast aluminum
Product size: 200x138x190MM
Aluminum substrate size: 160MM
Power: COB 50W
Single grain 24x2W/36x1.5W
Power box size: 150x95xH45MM



NO:YF-JBBG-04
40W 4600

Shell material: die cast aluminum
Product size: 180x138x130MM
Aluminum substrate size: 142MM
Power: COB 40W
Single grain 18x2W/24x1.5W
Power box size: 18x2W/24x1.5W



NO:YF-JBBG-05
50W 6670

Shell material: die cast aluminum
Product size: 200x138x130MM
Aluminum substrate size: 160MM
Power: COB 50W
Single grain 24x2W/36x1.5W
Power box size: 150x95xH45MM





NO:YF-xHDC-01
18W 3175 24W 3520
 Shell material: die cast aluminum
 Product size: 130x65x390MM
 Aluminum substrate size: 90MM
 Power: 9/12x2W
 Power box size: 90x40xH30MM



NO:YF-xHDC-02
24W 3795 36W 4535
 Shell material: die cast aluminum
 Product size: 160x73x480MM
 Aluminum substrate size: 120MM
 Power: 12/18x2W
 Power box size: 123x50xH40MM



NO:YF-xHDC-03
48W 5635 54W 6555
 Shell material: die cast aluminum
 Product size: 190x80x520MM
 Aluminum substrate size: 150MM
 Power: 24x2W/36x1.5W
 Power box size: 135x70xH47MM



NO:YF-xHDC-04
72W 7705 80W 8050
 Shell material: die cast aluminum
 Product size: 230x86x550MM
 Aluminum substrate size: 190MM
 Power: 36x2W/54x1.5W
 Power box size: 135x70xH47MM



NO:YF-xHDC-05
18W 3220 24W 3565
 Shell material: die cast aluminum
 Product size: 130x100x410MM
 Aluminum substrate size: 90MM
 Power: 9/12x2W
 Power box size: 90x40xH30MM



NO:YF-xHDC-06
24W 3960 36W 4650
 Shell material: die cast aluminum
 Product size: 160x105x510MM
 Aluminum substrate size: 120MM
 Power: 12/18x2W
 Power box size: 123x50xH40MM



NO:YF-xHDC-07
48W 5750 54W 6670
 Shell material: die cast aluminum
 Product size: 190x115x550MM
 Aluminum substrate size: 150MM
 Power: 24x2W/36x1.5W
 Power box size: 135x70xH47MM



NO:YF-xHDC-08
72W 7820 80W 8165
 Shell material: die cast aluminum
 Product size: 230x120x580MM
 Aluminum substrate size: 190MM
 Power: 36x2W/54x1.5W
 Power box size: 135x70xH47MM



NO:YF-xHDZ-01
18W 3175 24W 3520
 Shell material: die cast aluminum
 Product size: 130x65x185MM
 Aluminum substrate size: 90MM
 Power: 9/12x2W
 Power box size: 90x40xH30MM



NO:YF-xHDZ-02
24W 3795 36W 4535
 Shell material: die cast aluminum
 Product size: 160x73x225MM
 Aluminum substrate size: 120MM
 Power: 12/18x2W
 Power box size: 123x50xH40MM



NO:YF-xHDZ-03
48W 5635 54W 6555
 Shell material: die cast aluminum
 Product size: 190x80x260MM
 Aluminum substrate size: 150MM
 Power: 24x2W/36x1.5W
 Power box size: 135x70xH47MM



NO:YF-xHDZ-04
72W 7705 80W 8050
 Shell material: die cast aluminum
 Product size: 230x85x285MM
 Aluminum substrate size: 190MM
 Power: 36x2W/54x1.5W
 Power box size: 135x70xH47MM



NO:YF-xHDZ-05
18W 3220 24W 3565
 Shell material: die cast aluminum
 Product size: 130x100x205MM
 Aluminum substrate size: 90MM
 Power: 9/12x2W
 Power box size: 90x40xH30MM



NO:YF-xHDZ-06
24W 3960 36W 4650
 Shell material: die cast aluminum
 Product size: 160x105x255MM
 Aluminum substrate size: 120MM
 Power: 12/18x2W
 Power box size: 123x50xH40MM



NO:YF-xHDZ-07
48W 5750 54W 6670
 Shell material: die cast aluminum
 Product size: 190x115x290MM
 Aluminum substrate size: 150MM
 Power: 24x2W/36x1.5W
 Power box size: 135x70xH47MM



NO:YF-xHDZ-08
72W 7820 80W 8165
 Shell material: die cast aluminum
 Product size: 230x120x305MM
 Aluminum substrate size: 190MM
 Power: 36x2W/54x1.5W
 Power box size: 135x70xH47MM



NO:YF-xHBG-01

18W 3335 24W 3680

Shell material: die cast aluminum
Product size: 130x100x315MM
Aluminum substrate size: 90MM
Power: 9/12x2W
Power box size: 90x40xH30MM



NO:YF-xHBG-02

24W 4025 36W 4715

Shell material: die cast aluminum
Product size: 160x105x345MM
Aluminum substrate size: 120MM
Power: 12/18x2W
Power box size: 123x50xH40MM



NO:YF-xHBG-03

48W 5865 54W 6785

Shell material: die cast aluminum
Product size: 190x115x370MM
Aluminum substrate size: 150MM
Power: 24x2W/36x1.5W
Power box size: 135x70xH47MM



NO:YF-xHBG-04

72W 7935 80W 8280

Shell material: die cast aluminum
Product size: 230x120x395MM
Aluminum substrate size: 190MM
Power: 36x2W/54x1.5W
Power box size: 135x70xH47MM



NO:YF-xHBG-05

18W 3220 24W 3560

Shell material: die cast aluminum
Product size: 130x65x235MM
Aluminum substrate size: 90MM
Power: 9/12x2W
Power box size: 90x40xH30MM



NO:YF-xHBG-06

24W 3910 36W 4600

Shell material: die cast aluminum
Product size: 160x73x265MM
Aluminum substrate size: 120MM
Power: 12/18x2W
Power box size: 123x50xH40MM



NO:YF-xHBG-07

48W 5635 54W 6555

Shell material: die cast aluminum
Product size: 190x80x290MM
Aluminum substrate size: 150MM
Power: 24x2W/36x1.5W
Power box size: 135x70xH47MM



NO:YF-xHBG-08

72W 7590 80W 7935

Shell material: die cast aluminum
Product size: 230x85x315MM
Aluminum substrate size: 190MM
Power: 36x2W/54x1.5W
Power box size: 135x70xH47MM



NO:YF-xHBG-09

18W 3270 24W 3615

Shell material: die cast aluminum
Product size: 130x100x255MM
Aluminum substrate size: 90MM
Power: 9/12x2W
Power box size: 90x40xH30MM



NO:YF-xHBG-10

24W 3960 36W 4650

Shell material: die cast aluminum
Product size: 160x105x295MM
Aluminum substrate size: 120MM
Power: 12/18x2W
Power box size: 123x50xH40MM



NO:YF-xHBG-11

48W 5750 54W 6670


Shell material: die cast aluminum
Product size: 190x115x310MM
Aluminum substrate size: 150MM
Power: 24x2W/36x1.5W
Power box size: 135x70xH47MM



NO:YF-xHBG-12

72W 7820 80W 8165

Shell material: die cast aluminum
Product size: 230x120x335MM
Aluminum substrate size: 190MM
Power: 36x2W/54x1.5W
Power box size: 135x70xH47MM

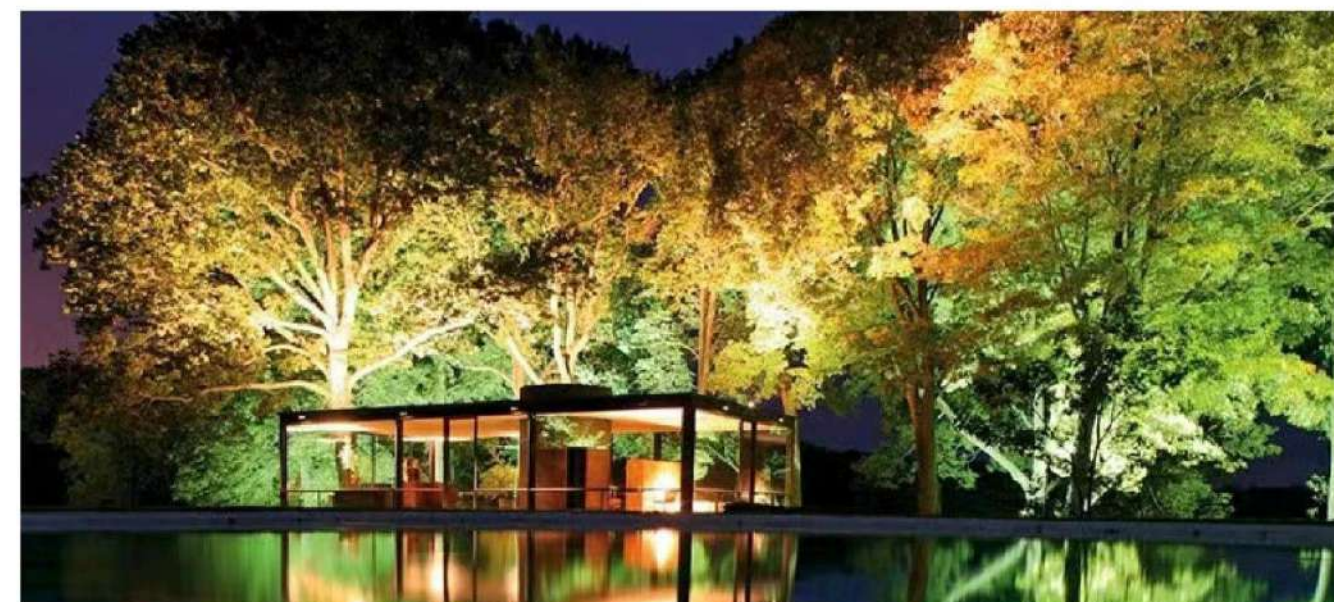



NO:YF-TGD-01

18W 3105 24W 3335

Size: 130x116x175MM
Inner diameter: 90mm
Power: 9/12x2W
Shell material: die cast aluminum

NO:YF-TGD-02

30W 4025 36W 4485

Size: 160x125x205MM
Inner diameter: 120mm
Power: 12x3W/18x2W
Shell material: die cast aluminum

NO:YF-TGD-03

48W 6095 72W 7590

Size: 190x130x245MM
Inner diameter: 150MM
Power: 24x2W/36x2W
Shell material: die cast aluminum

NO:YF-TGD-04

72W 8085 108W 9660

Size: 230x140x280MM
Inner diameter: 190MM
Power: 24x2W/54x2W
Shell material: die cast aluminum



NO:YF-TGD-05

18W 3175 24W 3405

Size: 130x146x175MM
Inner diameter: 90mm
Power: 9/12x2W
Shell material: die cast aluminum

NO:YF-TGD-06

30W 4140 36W 4600

Size: 160x158x205MM
Inner diameter: 120mm
Power: 12x3W/18x2W
Shell material: die cast aluminum

NO:YF-TGD-07


48W 6210 72W 7705

Size: 190x165x245MM
Inner diameter: 150MM
Power: 24x2W/36x2W
Shell material: die cast aluminum

NO:YF-TGD-08

72W 8280 108W 9890

Size: 230x175x280MM
Inner diameter: 190MM
Power: 24x2W/54x2W
Shell material: die cast aluminum

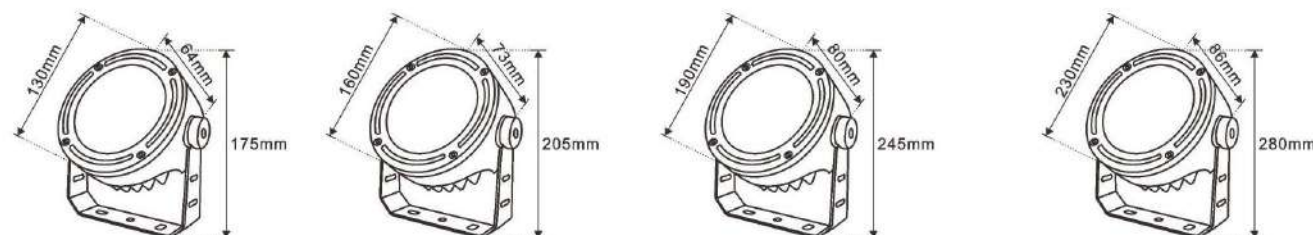

NO:YF-TGD-09

9W 2140 24W 2875

Size: 130x64x175MM
Inner diameter: 90mm
Power: 9/12x2W
Shell material: die cast aluminum
Power box size: 90x40xH25MM

NO:YF-TGD-10

24W 3335 36W 3795

Size: 160x73x205MM
Inner diameter: 120mm
Power: 12x3W/18x2W
Shell material: die cast aluminum
Power box size: 123x50xH40MM

NO:YF-TGD-11


48W 4715 54W 5865

Size: 190x80x245MM
Inner diameter: 150MM
Power: 24x2W/36x1.5W
Shell material: die cast aluminum
Power box size: 135x70xH47MM

NO:YF-TGD-12

72W 7130 80W 7705

Size: 230x86x280MM
Inner diameter: 190MM
Power: 36x2W/54x1.5W
Shell material: die cast aluminum
Power box size: 135x70xH47MM

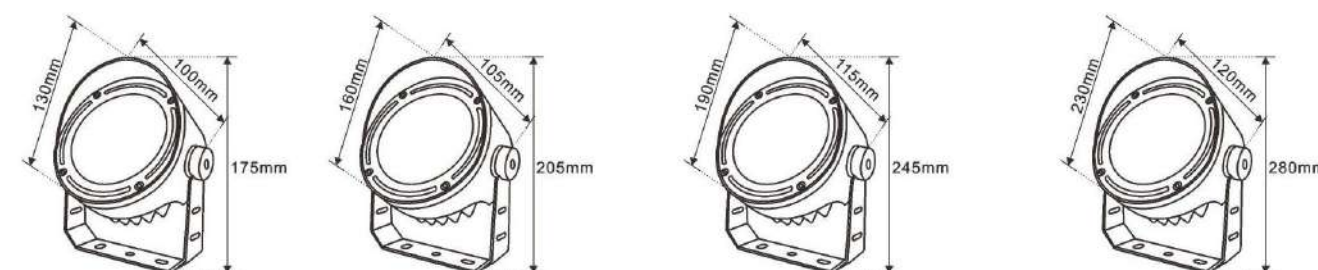

NO:YF-TGD-13

9W 2210 24W 2945

Size: 130x100x175MM
Inner diameter: 90mm
Power: 9/12x2W
Shell material: die cast aluminum
Power box size: 90x40xH30MM

NO:YF-TGD-14

24W 3405 36W 3865

Size: 160x105x205MM
Inner diameter: 120mm
Power: 12x3W/18x2W
Shell material: die cast aluminum
Power box size: 123x50xH40MM

NO:YF-TGD-15



48W 4830 54W 5980

Size: 190x115x245MM
Inner diameter: 150MM
Power: 24x2W/36x1.5W
Shell material: die cast aluminum
Power box size: 135x70xH47MM

NO:YF-TGD-16

72W 7245 80W 7820

Size: 230x120x280MM
Inner diameter: 190MM
Power: 36x2W/54x1.5W
Shell material: die cast aluminum
Power box size: 135x70xH47MM



NO:YF-TGD-17

9W 2005 12W 2120

Shell material: die cast aluminum
Product size: 110x110xH160MM
Aluminum substrate size: 85x85MM
Power: 9/12x2W
Power box size: 90x40xH25MM

NO:YF-TGD-18

24W 3335 36W 3795

Shell material: die cast aluminum
Product size: 135x135xH180MM
Aluminum substrate size: 100x100MM
Power: 12/18x2W
Power box size: 90x40xH30MM

NO:YF-TGD-19

30W 3795 48W 4485

Shell material: die cast aluminum
Product size: 165x165xH210MM
Aluminum substrate size: 125x125MM
Power: 24x2W/30W
Power box size: 123x50xH40MM

NO:YF-TGD-20

48W 5865 72W 6785

Shell material: die cast aluminum
Product size: 195x195xH250MM
Aluminum substrate size: 155x155MM
Power: 36x2W/48W
Power box size: 135x70xH47MM



NO:YF-TGD-21

9W 2070 12W 2185

Shell material: die cast aluminum
Product size: 110x110xH180MM
Aluminum substrate size: 85x85MM
Power: 9/12x2W
Power box size: 90x40xH25MM

NO:YF-TGD-22

24W 3450 36W 3910

Shell material: die cast aluminum
Product size: 135x135xH180MM
Aluminum substrate size: 100x100MM
Power: 12/18x2W
Power box size: 90x40xH30MM

NO:YF-TGD-23





30W 3910 48W 4600

Shell material: die cast aluminum
Product size: 165x165xH210MM
Aluminum substrate size: 125x125MM
Power: 24x2W/30W
Power box size: 123x50xH40MM

NO:YF-TGD-24

48W 5980 72W 6900

Shell material: die cast aluminum
Product size: 195x195xH250MM
Aluminum substrate size: 155x155MM
Power: 36x2W/48W
Power box size: 135x70xH47MM



NO:YF-TGD-30

9W 2945 18W 3405

Outer diameter size: Φ170MM
Inner diameter: Φ116mm
Power: 9W/18W
Shell material: die cast aluminum

NO:YF-TGD-31

24W 4945 36W 5060

Outer diameter size: Φ206MM
Inner diameter: Φ148mm
Power: 24W/36W
Shell material: die cast aluminum

NO:YF-TGD-32





36W 7360 54W 8510

Outer diameter size: Φ240MM
Inner diameter: Φ184mm
Power: 36W/54W
Shell material: die cast aluminum

NO:YF-TGD-33

60W 12190 72W 13110

Outer diameter size: Φ280MM
Inner diameter: Φ216mm
Power: 60W/72W
Shell material: die cast aluminum



NO:YF-TGD-34

9W 2990 18W 3450

Outer diameter size: Φ170MM
Inner diameter: Φ116mm
Power: 9W/18W
Shell material: die cast aluminum

NO:YF-TGD-35

24W 5060 36W 5170

Outer diameter size: Φ206MM
Inner diameter: Φ148mm
Power: 24W/36W
Shell material: die cast aluminum

NO:YF-TGD-36

36W 7475 54W 8625

Outer diameter size: Φ240MM
Inner diameter: Φ184mm
Power: 36W/54W
Shell material: die cast aluminum

NO:YF-TGD-37

60W 12420 72W 13340


Outer diameter size: Φ280MM
Inner diameter: Φ216mm
Power: 60W/72W
Shell material: die cast aluminum



NO:YF-PZDZ-01

**5W 1610 7W 1680
10W 1795**


Shell material: die cast aluminum
Product size: 65x90x160MM
Aluminum substrate size: 47MM
Power: COB 5W/7W/10W
Power box size: 50x30xH45MM



NO:YF-PZDZ-02

12W 2005 15W 2120


Shell material: die cast aluminum
Product size: 80x105x170MM
Inner diameter: 62MM
Power: COB 12W/15W
Power box size: 60x25xH50MM



NO:YF-PZDZ-03

20W 2760

Shell material: die cast aluminum
Product size: 95x115x190MM
Inner diameter: 75MM
Power: COB 18W/20W
Power box size: 60x25xH50MM



NO:YF-PZDZ-04

**3W 1795 5W 1890
10W 2070**


Shell material: die cast aluminum
Product size: 80x105x170MM
Inner diameter: 62MM
Power: 3W/5W/6x2W
Power box size: 60x25xH50MM



NO:YF-PZDZ-09

**5W 1660 7W 1725
10W 1840**


Shell material: die cast aluminum
Product size: 65x120x175MM
Inner diameter: 47MM
Power: COB 5W/7W/10W
Power box size: 50x30xH45MM



NO:YF-PZDZ-10

12W 2070 15W 2185


Shell material: die cast aluminum
Product size: 80x145x170MM
Inner diameter: 62MM
Power: COB 12W/15W
Power box size: 60x25xH50MM



NO:YF-PZDZ-11

20W 2830


Shell material: die cast aluminum
Product size: 95x160x215MM
Inner diameter: 75MM
Power: COB 18W/20W
Power box size: 70x38xH60MM



NO:YF-PZDZ-12

30W 3450


Shell material: die cast aluminum
Product size: 110x170x240MM
Inner diameter: 90MM
Power: COB 24W/30W
Power box size: 78x46xH68MM



NO:YF-PZDZ-05

18W 2875


Shell material: die cast aluminum
Product size: 95x115x190MM
Aluminum substrate size: 75MM
Power: COB 20W/6x3W/9x2W
Power box size: 70x38xH60MM



NO:YF-PZDZ-06

**3W 1840 5W 1935
10W 2120**


Shell material: die cast aluminum
Product size: 80x145x170MM
Inner diameter: 62MM
Power: 3W/5W/6Wx2



NO:YF-PZDZ-07

18W 3105 24W 3565


Shell material: die cast aluminum
Product size: 110x170x240MM
Inner diameter: 90MM
Power: 9x2W/12x2W



NO:YF-PZDZ-08

18W 2945


Shell material: die cast aluminum
Product size: 95x160x215MM
Inner diameter: 75MM
Power: COB 20W/6x3W/9x2W
Power box size: 70x38xH60MM



NO:YF-PZDZ-13

12W 2760


Outer diameter size: $\Phi 105$ MM
Inner diameter: $\Phi 68$ mm
Power: 3W/6Wx2
Shell material: die cast aluminum



NO:YF-PZDZ-14

12W 2830


Outer diameter size: $\Phi 105$ MM
Inner diameter: $\Phi 68$ mm
Power: 3W/5W/6Wx2
Shell material: die cast aluminum



NO:YF-PZDZ-15

30W 4830

Outer diameter size: $\Phi 150$ MM
Inner diameter: $\Phi 116$ mm
Power: 9W/12W/15W/18Wx2
Shell material: die cast aluminum



NO:YF-PZDZ-16

45W 6785

Outer diameter size: $\Phi 180$ MM
Inner diameter: $\Phi 146$ mm
Power: 18W/24Wx2
Shell material: die cast aluminum



NO:YF-PZDC-01
5W 1565 7W 1610 10W 1725
 Shell material: die cast aluminum
 Product size: 65x90xH280MM
 Aluminum substrate size: 47MM
 Power: COB 5W/7W/10W
 Power box size: 50x30xH45MM



NO:YF-PZDC-02
12W 1955 15W 2070
 Shell material: die cast aluminum
 Product size: 80x105xH290MM
 Aluminum substrate size: 62MM
 Power: COB 12W/15W
 Power box size: 60x25xH50MM



NO:YF-PZDC-03
20W 2715
 Shell material: die cast aluminum
 Product size: 95x115xH310MM
 Aluminum substrate size: 75MM
 Power: COB 18W/20W
 Power box size: 70x38xH60MM



NO:YF-PZDC-08
18W 2875
 Shell material: die cast aluminum
 Product size: 95x115xH310MM
 Aluminum substrate size: 75MM
 Power: 6x3W/9x2W
 Power box size: 70x38xH60MM



NO:YF-PZDC-09
3W 1795 5W 1890 10W 2070
 Shell material: die cast aluminum
 Product size: 80x145xH290MM
 Aluminum substrate size: 62MM
 Power: 3W/5W/6Wx2
 Power box size: 60x25xH50MM



NO:YF-PZDC-10
18W 2900
 Shell material: die cast aluminum
 Product size: 95x160xH340MM
 Aluminum substrate size: 75MM
 Power: 6x3W/9x2W
 Power box size: 70x38xH60MM



NO:YF-PZDC-11
18W 3130 24W 3565
 Shell material: die cast aluminum
 Product size: 110x170xH360MM
 Aluminum substrate size: 90MM
 Power: 9W/12Wx2
 Power box size: 78x46xH68MM



NO:YF-PZDC-04
5W 1610 7W 1680 10W 1795
 Shell material: die cast aluminum
 Product size: 65x120xH300MM
 Aluminum substrate size: 47MM
 Power: COB 5W/7W/10W
 Power box size: 50x30xH45MM



NO:YF-PZDC-05
12W 2005 15W 2120
 Shell material: die cast aluminum
 Product size: 80x145xH290MM
 Aluminum substrate size: 62MM
 Power: COB 12W/15W
 Power box size: 60x25xH50MM



NO:YF-PZDC-06
20W 2760
 Shell material: die cast aluminum
 Product size: 95x160xH340MM
 Aluminum substrate size: 75MM
 Power: COB 18W/20W
 Power box size: 70x38xH60MM



NO:YF-PZDC-07
30W 3405
 Shell material: die cast aluminum
 Product size: 110x170xH360MM
 Aluminum substrate size: 90MM
 Power: COB 24W/30W
 Power box size: 78x46xH68MM



NO:YF-PZDC-12
12W 2530
 Outer diameter size: Φ105MM
 Inner diameter: Φ68mm
 Power: 3W/6W
 Shell material: die cast aluminum




NO:YF-PZDC-13
30W 4255
 Outer diameter size: Φ150MM
 Inner diameter: Φ116mm
 Power: 9W/12W/15W/18W
 Shell material: die cast aluminum



NO:YF-PZDC-14
30W 4370
 Outer diameter size: Φ150MM
 Inner diameter: Φ116mm
 Power: 9W/12W/15W/18W
 Shell material: die cast aluminum




NO:YF-PZDC-15
30W 6325
 Outer diameter size: Φ180MM
 Inner diameter: Φ146mm
 Power: 18W/24W
 Shell material: die cast aluminum



NO:YF-MHD-01

10W 1564


Outer diameter size: Φ90x120MM
Light-emitting surface: 11MM
Power: COB 10W
Shell material: die cast aluminum



NO:YF-MHD-02

20W 2185

Outer diameter size: Φ115x175MM
Light-emitting surface: 17MM
Power: COB 20W
Shell material: die cast aluminum



NO:YF-MHD-03

20W 2875

Outer diameter size: Φ150x210MM
Light-emitting surface: 17MM
Power: COB 30W
Shell material: die cast aluminum



NO:YF-BD-01

10W 2185 15W 2645


Outer diameter size: Φ100x170MM
Light-emitting surface: 11MM
Power: COB 10W/15W
Shell material: die cast aluminum



NO:YF-BD-02

20W 3105 25W 3335

Outer diameter size: Φ130x220MM
Light-emitting surface: 17MM
Power: COB 20W/25W
Shell material: die cast aluminum



NO:YF-BD-03

30W 4255 40W 4485

Outer diameter size: Φ160x250MM
Light-emitting surface: 17MM
Power: COB 30W/40W
Shell material: die cast aluminum



NO:YF-BD-04

50W 6555

Outer diameter size: Φ200x310MM
Light-emitting surface: 23MM
Power: COB 50W
Shell material: die cast aluminum




NO:YF-BD-05


70W 8625

Outer diameter size: Φ230x345MM
Light-emitting surface: 23MM
Power: COB 280W
Shell material: die cast aluminum







NO:YF-FX-01
9W 1910 12W 2070
 Outer diameter size: 110x110MM
 Inner diameter: 85x85MM
 Power: 9W/12W
 Shell material: die cast aluminum




NO:YF-FX-02
16W 2415
 Outer diameter size: 130x130MM
 Inner diameter: 95x95MM
 Power: 16W
 Shell material: die cast aluminum




NO:YF-FX-03
18W 2875 24W 3175
 Outer diameter size: 160x160MM
 Inner diameter: 125x125MM
 Power: 18W/24W
 Shell material: die cast aluminum




NO:YF-FX-06
9W 1955 12W 2120
 Outer diameter size: 110x110x150MM
 Inner diameter: 85x85MM
 Power: 9W/12W
 Shell material: die cast aluminum




NO:YF-FX-07
16W 2485
 Outer diameter size: 130x130x170MM
 Inner diameter: 95x95MM
 Power: 16W
 Shell material: die cast aluminum




NO:YF-FX-08
18W 2945 24W 3270
 Outer diameter size: 160x160x210MM
 Inner diameter: 128x128MM
 Power: 18W/24W
 Shell material: die cast aluminum




NO:YF-FX-04
24W 3680 36W 4140
 Outer diameter size: 190x190MM
 Inner diameter: 155x155MM
 Power: 24W/36W
 Shell material: die cast aluminum



NO:YF-FX-05
48W 5865
 Outer diameter size: 230x230MM
 Inner diameter: 193x193MM
 Power: 48W
 Shell material: die cast aluminum

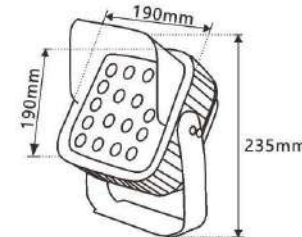

NO:YF-FX-09
24W 3795 36W 4255
 Outer diameter size: 190x190x235MM
 Inner diameter: 155x155MM
 Power: 24W/36W
 Shell material: die cast aluminum



NO:YF-FX-10
48W 6095
 Outer diameter size: 230x230x300MM
 Inner diameter: 193x193MM
 Power: 48W
 Shell material: die cast aluminum





NO:YF-FY-01

1430

Product size: 55x66x72MM
Power: 6W
Shell material: die cast aluminum



NO:YF-FY-03

12W 2530

Product size: 105x125x145MM
Power: 9W/12W
Shell material: die cast aluminum



NO:YF-FY-03

1495



Product size: 148x45x105MM
Power: 6W
Shell material: die cast aluminum



NO:YF-FY-04

9200


Product size: 250x370x80MM
Power: 6*6W
Shell material: die cast aluminum



NO:YF-BDD-01

24V 625


Outer diameter size: $\Phi 100 \times 35$ MM
Inner diameter: $\Phi 66 \times 25$ MM
Power: 2W
Shell material: die cast aluminum



NO:YF-BDD-03

24V 690


Outer diameter size: $\Phi 120 \times 38$ MM
Inner diameter: $\Phi 83 \times 29$ MM
Power: 3W
Shell material: die cast aluminum



NO:YF-BDD-03

24V 970


Outer diameter size: $\Phi 150 \times 40$ MM
Inner diameter: $\Phi 110 \times 33$ MM
Power: 4W/5W
Shell material: die cast aluminum



NO:YF-BDD-04

220V 1610

Outer diameter size: $\Phi 70 \times 150$ MM
Power: 10W — per beam/COB
Shell material: die cast aluminum
+ Tempered glass

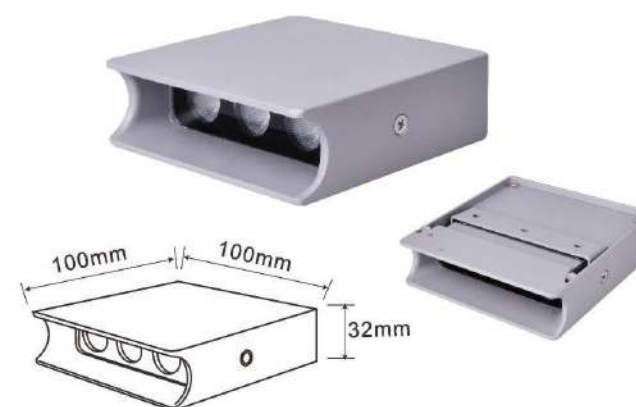

NO:YF-BDD-05

24V 920

Outer diameter size: $\Phi 100 \times 100 \times 32$ MM
Inner diameter: $\Phi 73 \times 18$ MM
Power: 3W
Shell material: die cast aluminum



NO:YF-BDD-06

24V 1150

Outer diameter size: $\Phi 120 \times 120 \times 32$ MM
Inner diameter: $\Phi 93 \times 18$ MM
Power: 4W
Shell material: die cast aluminum



NO:YF-NYD-01
2255 2645 2415
Product size: 200x185x140MM
Aluminum substrate size: 68MM
Power: 3W/5W/6W
Shell material: die cast aluminum



NO:YF-NYD-02
3335 3565
Product size: 220x205x170MM
Aluminum substrate size: 90MM
Power: 9W/12W
Shell material: die cast aluminum



NO:YF-NYD-03
4255 4485
Product size: 250x235x190MM
Aluminum substrate size: 133MM
Power: 18W/24W
Shell material: die cast aluminum



NO:YF-NYD-04
5635 5865
Product size: 300x285x230MM
Aluminum substrate size: 160MM
Power: 24W/36W
Shell material: die cast aluminum



NO:YF-NYD-05
6325 6670
Product size: 240x165x240MM
Aluminum substrate size: 160MM
Power: 24W/36W
Shell material: die cast aluminum



NO:YF-NYD-06
17825 18745
Product size: 400x220x340MM
Aluminum substrate size: 240MM
Power: 72W/100W
Shell material: die cast aluminum



NO:YF-NYD-07
1795 1955 2185
Product size: 70x140x290MM
Aluminum substrate size: 68MM
Power: 3W/5W/6W
Shell material: die cast aluminum



NO:YF-NYD-08
2760 2990
Product size: 95x170x300MM
Aluminum substrate size: 90MM
Power: 9W/12W
Shell material: die cast aluminum



NO:YF-NYD-09
3680 3910
Product size: 135x190x350MM
Aluminum substrate size: 133MM
Power: 18W/24W
Shell material: die cast aluminum



NO:YF-NYD-10
4830 5060
Product size: 165x230x405MM
Aluminum substrate size: 160MM
Power: 24W/36W
Shell material: die cast aluminum



NO:YF-DMD-01
510
Outer diameter size: Φ65x80MM
Inner diameter: Φ35MM
Hole size: Φ60MM
Power: 1W
Shell material: die cast aluminum



NO:YF-DMD-02
970
Outer diameter size: Φ80x80MM
Inner diameter: Φ50MM
Hole size: Φ75MM
Power: 3W
Shell material: die cast aluminum



NO:YF-DMD-03
1035
Outer diameter size: Φ100x80MM
Inner diameter: Φ62MM
Hole size: Φ95MM
Power: 3W
Shell material: die cast aluminum



NO:YF-DMD-04
1220
Outer diameter size: Φ120x90MM
Inner diameter: Φ83MM
Hole size: Φ115MM
Power: 6W
Shell material: die cast aluminum



NO:YF-DMD-05
1335
Outer diameter size: Φ150x90MM
Inner diameter: Φ85MM
Hole size: Φ128MM
Power: 7W
Shell material: die cast aluminum



NO:YF-DMD-06
1680 1565
Outer diameter size: Φ180x90MM
Inner diameter: Φ112MM
Hole size: Φ158MM
Power: 9W/12W
Shell material: die cast aluminum



NO:YF-DMD-07
2025 2185
Outer diameter size: Φ200x90MM
Inner diameter: Φ142MM
Hole size: Φ188MM
Power: 15W/18W
Shell material: die cast aluminum




NO:YF-DMD-08
2415 2530
Outer diameter size: Φ220x90MM
Inner diameter: Φ162MM
Hole size: Φ208MM
Power: 18W/24W
Shell material: die cast aluminum



NO:YF-DMD-09
2760 3335
Outer diameter size: Φ250x90MM
Inner diameter: Φ190MM
Hole size: Φ238MM
Power: 24W/36W
Shell material: die cast aluminum




NO:YF-DMD-10
3680 4255
Outer diameter size: Φ300x90MM
Inner diameter: Φ240MM
Hole size: Φ288MM
Power: 36W/48W
Shell material: die cast aluminum




NO:YF-PQD-01
1380

Outer diameter size: Φ115x70MM
Inner diameter: Φ32MM
Hole size: Φ90MM
Power: 6W
Shell material: die cast aluminum
+ stainless steel




NO:YF-PQD-02
1495

Outer diameter size: Φ130x85MM
Inner diameter: Φ38MM
Hole size: Φ105MM
Power: 6W
Shell material: die cast aluminum
+ stainless steel




NO:YF-PQD-03
1840 2070

Outer diameter size: Φ160x85MM
Inner diameter: Φ38MM
Hole size: Φ125MM
Power: 9W/12W
Shell material: die cast aluminum
+ stainless steel




NO:YF-PQD-04
2255

Outer diameter size: Φ180x85MM
Inner diameter: Φ50MM
Hole size: Φ150MM
Power: 18W
Shell material: die cast aluminum
+ stainless steel




NO:YF-PQD-05
3335

Outer diameter size: Φ200x85MM
Inner diameter: Φ60MM
Hole size: Φ170MM
Power: 24W
Shell material: die cast aluminum
+ stainless steel




NO:YF-PQD-06
2645

Outer diameter size: Φ130x76MM
Inner diameter: Φ82MM
Hole size: Φ23MM
Power: 6W
Shell material: stainless steel




NO:YF-PQD-07
2875

Outer diameter size: Φ150x76MM
Inner diameter: Φ95MM
Hole size: Φ27MM
Power: 6W
Shell material: stainless steel




NO:YF-PQD-08
3335

Outer diameter size: Φ170x76MM
Inner diameter: Φ110MM
Hole size: Φ36MM
Power: 9W
Shell material: stainless steel




NO:YF-PQD-09
3565

Outer diameter size: Φ180x76MM
Inner diameter: Φ120MM
Hole size: Φ42MM
Power: 12W
Shell material: stainless steel




NO:YF-PQD-10
4715

Outer diameter size: Φ210x76MM
Inner diameter: Φ138MM
Hole size: Φ51MM
Power: 15W
Shell material: stainless steel



NO:YF-PQD-11
5635

Outer diameter size: Φ230x76MM
Inner diameter: Φ162MM
Hole size: Φ65MM
Power: 18W
Shell material: stainless steel



NO:YF-PQD-12
6785

Outer diameter size: Φ250x76MM
Inner diameter: Φ183MM
Hole size: Φ78MM
Power: 24W
Shell material: stainless steel



NO:X23096-PW
8280



NO:X23097-PW
6670






NO:X23098-L-PW
4255



NO:X23098-M-PW
3565



NO:X23098-S-PW
3335

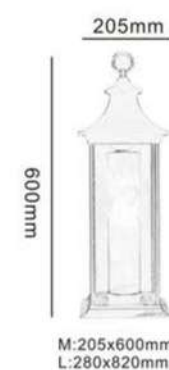



NO:X23002-WD

S:2645 M:3910



NO:X23002-WU

S:2645 M:3910



NO:X23002-H

S:2530 M:3795



NO:X23002-M-PL

8970



NO:X23002-S-PU2

10925



NO:X23002-S-PU3

13340



NO:X23002-PE

S:2530 M:3795



NO:X23002-PW

S:2645 M:3910



NO:X23002-PS

S:3565 M:4830





NO:X23003-WD

S:2645 M:3910



NO:X23003-WU

S:2645 M:3910



NO:X23003-H

S:2530 M:3795



NO:X23003-PE

S:2530 M:3795



NO:X23003-PW

S:2645 M:3910



NO:X23003-PS

S:3565 M:4930



NO:X23003-M-PL

8855




NO:X23003-S-PU2

11845



NO:X23003-S-PU3

14490

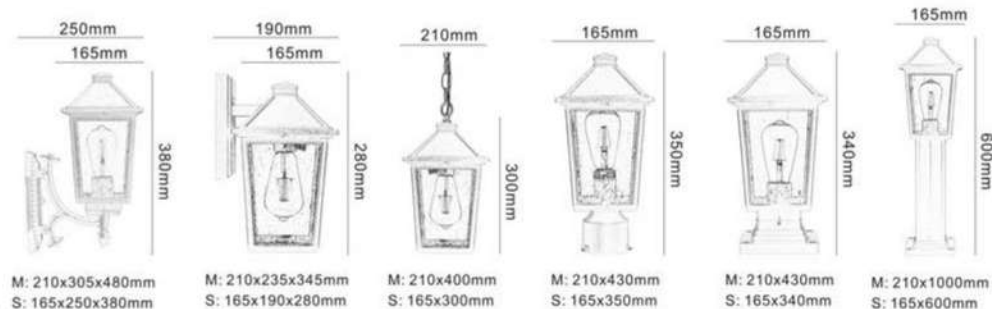



NO:X23004-WD
2645



NO:X23004-WU
2645



NO:X23004-H
2530



NO:X23004-PE
2530



NO:X23004-PW
2645



NO:X23004-PS
3565





NO:X23007-WD
S:2530 M:3910



NO:X23007-H
S:2415 M:3795



NO:X23008-WD
2530



NO:X23008-H
2255



NO:X23007-PE
S:2255 M:3865



NO:X23007-PS(B)
S:3335 M:4945



NO:X23007-PS(A)
2990



NO:X23008-PE
2255



NO:X23008-PS(B)
3350



NO:X23008-PS(A)
2990



S: 170x205x300mm
M: 215x260x370mm



S: 170x310mm
M: 215x370mm



S: 170x380mm
M: 215x440mm



S: 170x690mm



S: 170x710mm
M: 215x1000mm



205mm
170mm
300mm



170mm
310mm



170mm
380mm



170mm
690mm



170mm
710mm





NO:X23009-WD(A)
S:2530 M:3910



NO:X23009-WD(B)
S:2415 M:3795



NO:X23009-H
S:2415 M:3795




NO:X23009-PE
S:2255 M:3865



NO:X23009-PS(A)
2990



NO:X23009-PS(B)
S:3335 M:4945



S:170x195x290mm
M:215x240x380mm




S:170x210x310mm
M:215x260x380mm




S:170x315mm
M:215x390mm




S:170x400mm
M:215x490mm



S:170x690mm



S:170x730mm
M:215x1000mm

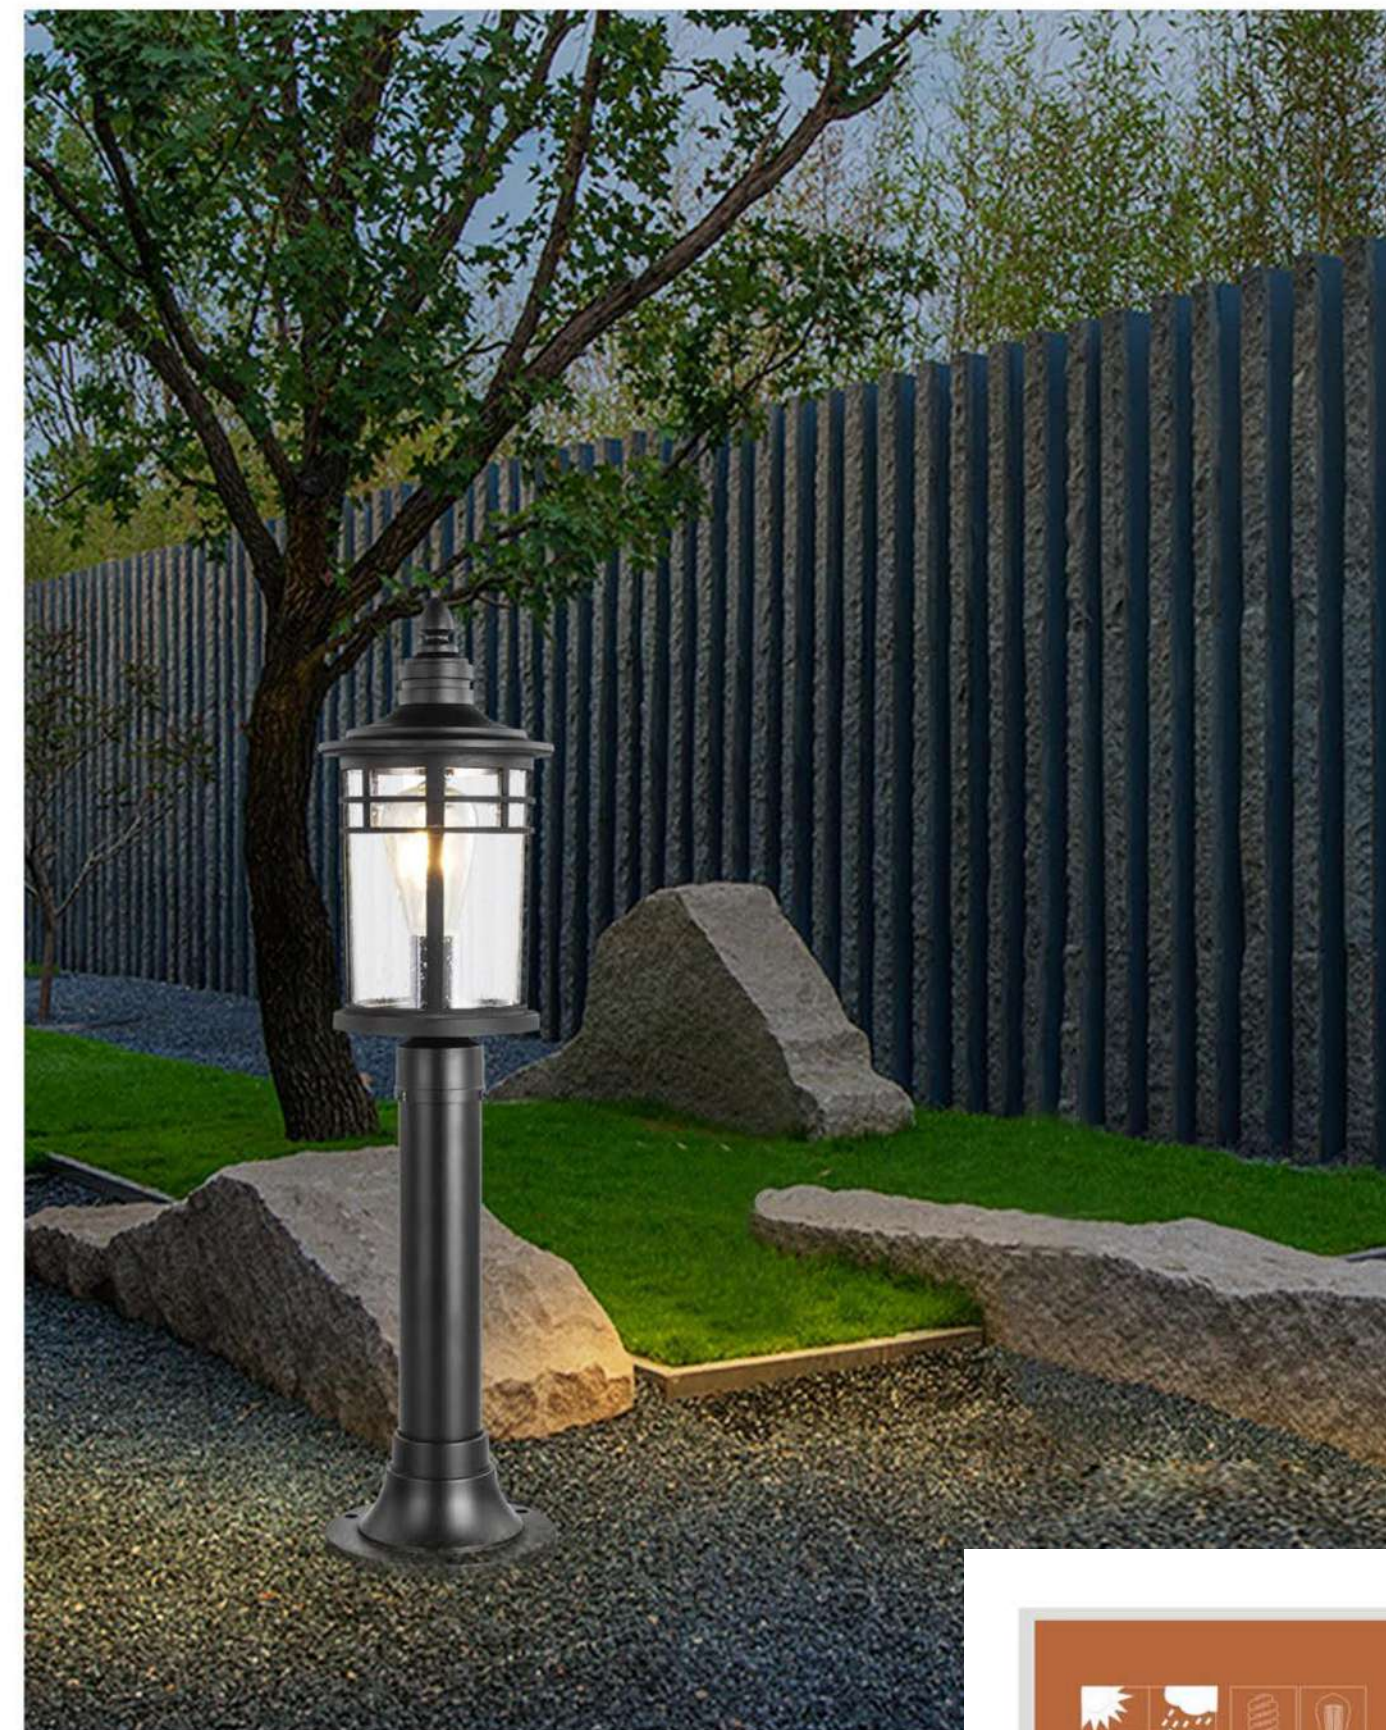



NO:X23016-WD
2255



NO:X23016-H
2025



NO:X23017-WD
2185



NO:X23017-H
1955



NO:X23016-PS
3105



NO:X23016-PF
2255








NO:X23017-PE
1955



NO:X23017-PS
3040



NO:X23017-PF
2185





NO:X23018-WD
2185



NO:X23018-H
1955



NO:X2309-WD
2255



NO:X23019-H
2025



NO:X23018-PE
1955



NO:X23018-PS
3040



NO:X23018-PF
2185





NO:X23019-PE
2025



NO:X23019-PS
3105



NO:X23019-PF
2255

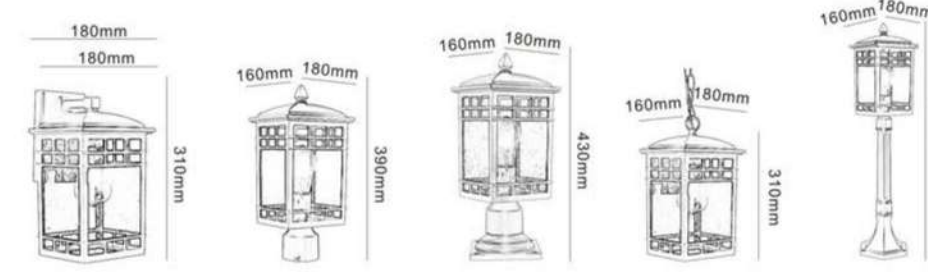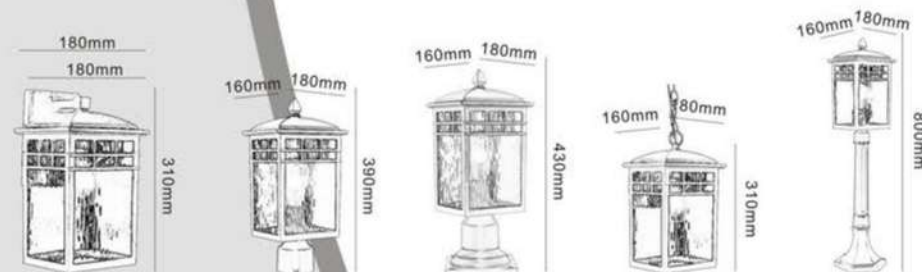



NO:X23021-WU

2185



NO:X23021-WD

2185



NO:X23021-H

1955



NO:X23021-PU2

11385



NO:X23021-PU3

13225



NO:X23021-PE

1840








NO:X23021-PW

2185



NO:X23021-PS

3105





NO:X23059-WD

S:2645 M:3335



NO:X23059-H

S:2645 M:3335



NO:X23059-PE

S:2530 M:3200



S:150x200x330mm
M:205x270x460mm
L:280x370x650mm



S:150x325mm
M:205x415mm
L:280x590mm



M:205x465mm
L:280x635mm



NO:X23060-WU

S:2255 M:2875




NO:X23060-WD

S:2255 M:2875



S:180x220x430mm
M:240x270x550mm



S:180x220x315mm
M:240x270x460mm



S:180x310mm
M:240x350mm



M:240x430mm



S:180x715mm



NO:X23060-H

S:2255 M:2875



NO:X23060-PE

S:2185 M:2875





NO:X23034-WD

S:2530 M:3450 L:4830



NO:X23034-H

S:2415 M:3335 L:4715



NO:X23034-PS

S:3335 M:4485 L:5865



NO:X23034-PW


S:2530 M:3450 L:4830



S: 135x170xH280mm
M: 180x220xH345mm
L: 205x245xH430mm




S: 135x260mm
M: 180x300mm
L: 205x400mm



S: 135x300mm
M: 180x360mm
L: 205x410mm



S: 135x305mm
M: 180x370mm
L: 205x420mm



S: 135x560mm
M: 180x720mm
L: 205x1020mm





NO:X23030-H

S:2530 M:3450 L:5520



NO:X23030-WD

S:2645 M:3565 L:5635



NO:X23030-PW

S:2645 M:3565 L:5635



NO:X23030-PS

S:3565 M:4715



NO:X23031-WD

S:2415 M:3335 L:4485



NO:X23031-PS(B)

3335



NO:X23031-PS(A)

6325




NO:X23031-PF

S:2415 M:3335




NO:X23031-PS

3795

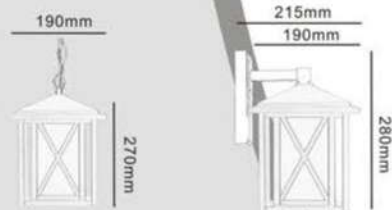

S:190x270mm
M:230x320mm
L:280x380mm



S:190x215x280mm
M:230x260x365mm
L:280x305x450mm



S:190x340mm
M:230x390mm
L:280x480mm



S:190x695mm
M:230x1000mm



S:145x175x300mm
M:170x205x370mm
L:195x240x430mm



S:145x390mm
M:170x455mm



145x720mm



145x780mm



170x1550mm





NO:X23035-WD

S:1955 M:2875 L:4485



NO:X23035-H

S:1840 M:2760 L:4370



NO:X23036-WD

S:1955 M:2875 L:4485



NO:X23036-H

S:1840 M:2760 L:4370



NO:X23035-PE

S:1840 M:2760 L:4370



NO:X23035-PS

S:2990 M:3910 L:5520



NO:X23035-PW

S:1955 M:2875 L:4485



NO:X23036-PE

S:1840 M:2760 L:4370





NO:X23036-PS

S:2990 M:3910 L:5520



NO:X23036-PW

S:1955 M:2875 L:4485

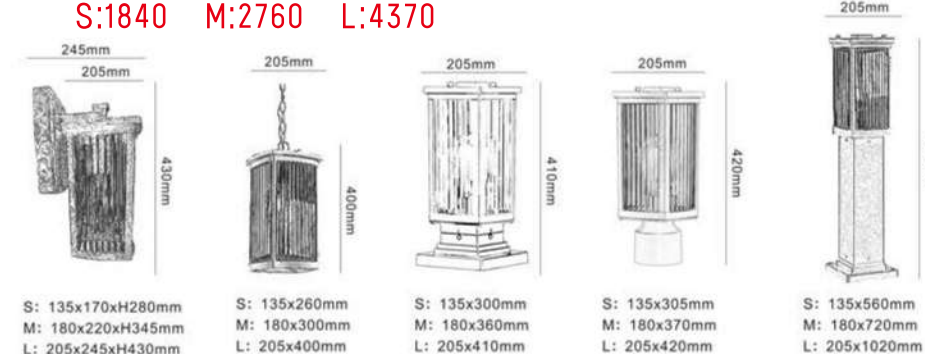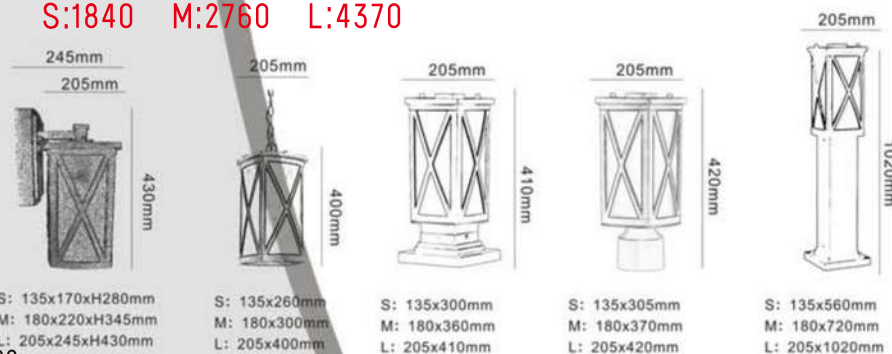



NO:X23037-PE
2645



NO:X23037-PF
3105




NO:X23037-PS
3335



NO:X23037-PL
6095



NO:X23037-PU2
10925

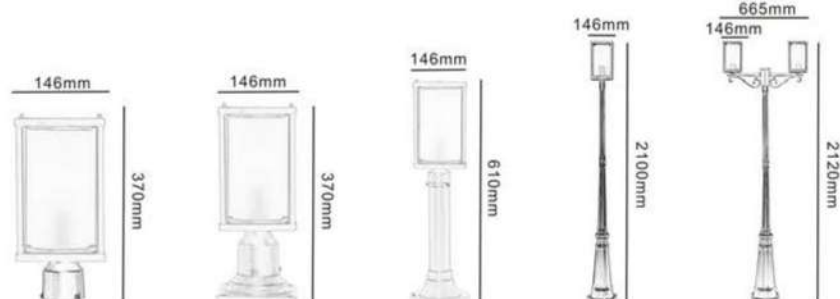

NO:X23037-WD-M
3335



NO:X23037-W-L
3335



NO:X23037-H
2875




NO:X23037-WD-S
2715



NO:X23037-W-S
2715



NO:X23037-W-M
3105

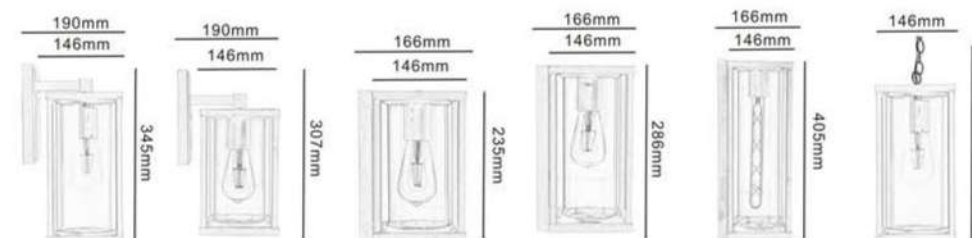



NO:X23038

1565



NO:X23039

2005




NO:X23041

1565



NO:X23040

1955

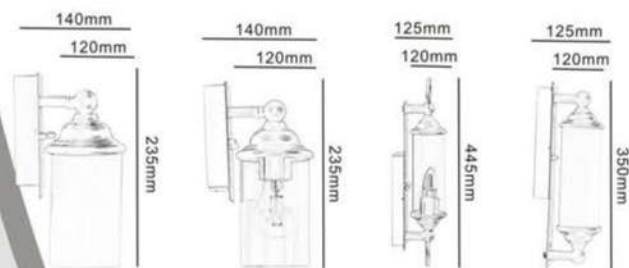

NO:X23043

2185




NO:X23042

2530



NO:X23044

1955

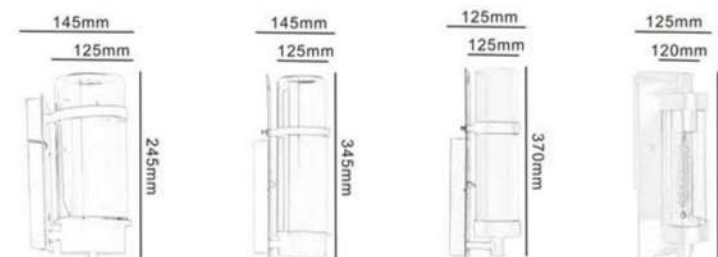

NO:X23045

2070








NO:X23049-WD
S:1725 M:2645



NO:X23049-H
S:1610 M:2530



NO:X23049-PW
S:1725 M:2645



NO:X23050-S-WD
2070



NO:X23050-S-WD
2070



NO:X23050-L-WD
2990



NO:X23050-S-PS
3105



NO:X23050-L-WD
2990





NO:X23051
2530



NO:X23052
2530



NO:X23053
2875



NO:X23054
3335



NO:X23055
3335





NO:X23068-H

2185



NO:X23068-PF

2645



NO:X23068-PS

2945



NO:X23069-H

2140



NO:X23069-PF

2600



NO:X23069-PS

2900



NO:X23068-WD

2415





NO:X23074-S-WU
5175




NO:X23074-H
S:4255 M:5865
L:10350 XL:13340



NO:X23074-M-WU
6785



NO:X23074-S-PS
5175

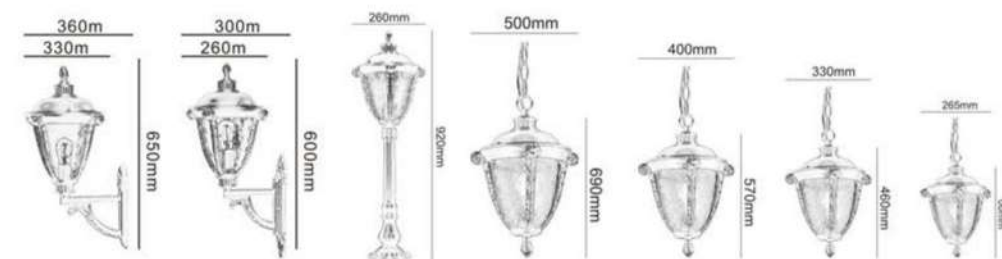



NO:X23083-WD

2235



NO:X23083-H

2185



NO:X23083-PW

2185



NO:X23083-PS

3105



NO:X23083-PD2

15640



S:155x270mm
M:230x330mm
L:280x370mm
XL:330x450mm
XXL:400x550mm



S:155x360mm
M:230x430mm
L:280x540mm
XL:330x610mm
XXL:400x730mm



S:155x220x315mm
M:230x290x400mm
L:280x450x460mm



S:155x730mm
M:230x1000mm



795xH3200~3500mm





NO:X23001-WD

S:2760 M:4025



NO:X23001-WU

S:2760 M:4025



NO:X23001-H

S:2645 M:3910



NO:X23001-M-PL

9085



NO:X23001-S-PU2

11155



NO:X23001-S-PU3

13685



NO:X23001-PE

S:2645 M:3910





NO:X23001-PW

S:2760 M:4025



NO:X23001-PS

S:3680 M:4945

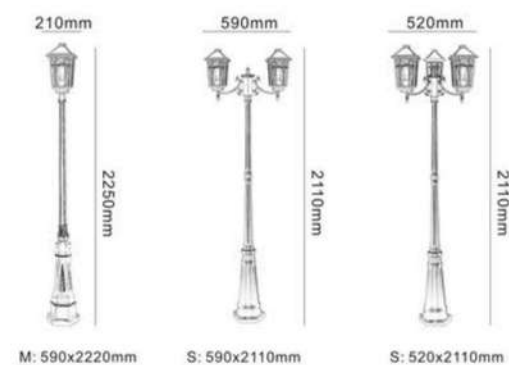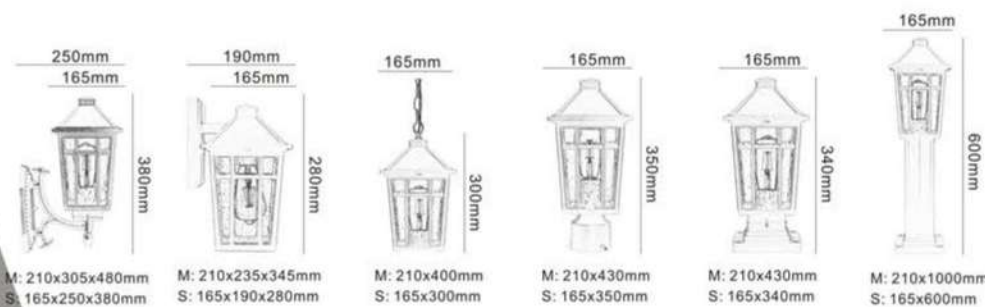



Stainless steel | Black polished gold
Dolomite | Containing light source
Including expansion screw | Foam package

60*12*10

WL-0426-A-BK 5980



Stainless steel | Imitation copper color
Dolomite | Containing light source
Including expansion screw | Foam package

60*12*10

WL-0426-A-GD 5865



Stainless steel | Black polished gold
Dolomite | Containing light source
Including expansion screw | Foam package

60*12*10

WL-0426-B-BK 5980



Stainless steel | Coffee grounds
With light source | 3000K | With expansion screws

BO-S-0426-A | BO-S-0426-A-SO

E27 solar power

25*25*13	7820	10120
30*30*15	8740	11040
40*40*20	9660	11960



Black sand | Changhong glass
With light source | With expansion screws

BO-S-0426-B | BO-S-0426-B-SO

E27 solar power

25*25*18	5635	6670
30*30*18	6095	7245
35*35*18	7360	9200
40*40*20	8280	10580



Coffee grounds | Dolomite
With light source | With expansion screws

BO-S-0426-C | BO-S-0426-C-SO

E27 solar power

25*25*17	5060	6900
30*30*20	5980	8050
35*35*23	7360	9200
40*40*26	9430	11500
45*45*30	10350	12420



Stainless steel | Imitation copper color
Dolomite | Containing light source
Including expansion screw | Foam package

60*12*10

WL-0426-B-GD 5865



Stainless steel | Black polished gold
Dolomite | Containing light source
Including expansion screw | Foam package

60*12*10

WL-0426-C-BK 5980



Stainless steel | Imitation copper color
Dolomite | Containing light source
Including expansion screw | Foam package

60*12*10

WL-0426-C-GD 5865



Coffee grounds | Dolomite
With light source | With expansion screws

BO-S-04-D | BO-S-0426-D-SO

E27 solar power

25*25*33	6440	8510
30*30*39	7360	9200
35*35*44	8050	10120



Black sand | Beige marble
With light source | With expansion screws

BO-S-0426-E | BO-S-0426-E-SO

E27 solar power

22*22*19	5980	7360
28*28*22	8280	10350
38*38*30	9200	11500
45*45*36	10350	12650



Coffee grounds | Snowflake marble
With light source | With expansion screws

BO-S-0426-F | BO-S-0426-F-SO

E27 solar power

22*22*19	5980	7360
28*28*22	8280	10350
38*38*30	9200	11500
45*45*36	10350	12650



Galvanized sheet | Black sand
Dolomite | Containing light source
Including expansion screw | Foam package

WL-0426-D-BK

60*12*11	3910
80*12*11	4600
100*15*13	5520



Stainless steel | Imitation copper color
Dolomite | Containing light source
Including expansion screw | Foam package

WL-0426-D-GD

47*12*10	5060
60*12*11	5405
80*12*11	5980
100*15*13	6900
120*20*13	8050



Black sand | White acrylic
With light source | With expansion screws

BO-S-0426-G | BO-S-0426-G-SO

E27 solar power

20*20*20	4140	5290
25*25*25	4830	5980
30*30*30	5405	6785
35*35*35	5980	7820
40*40*40	7360	9890



Solar Energy




Light Source



Ceramic lamp head



Expansion screws

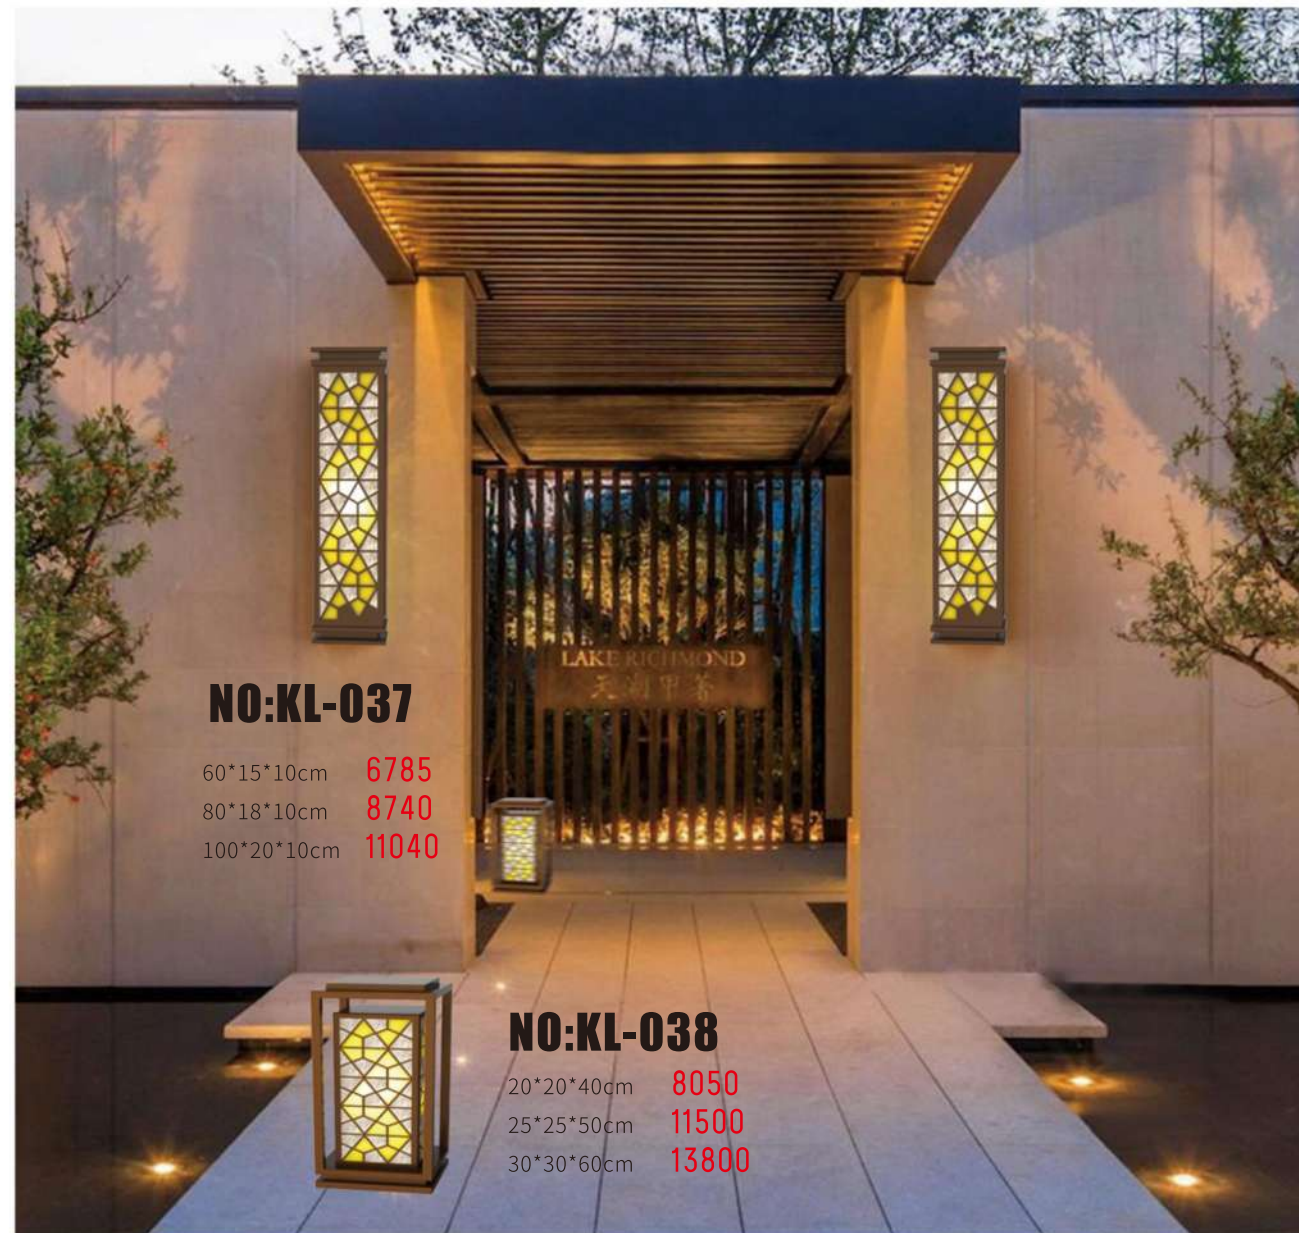

NO:KL-037

60*15*10cm 6785
80*18*10cm 8740
100*20*10cm 11040

NO:KL-038

20*20*40cm 8050
25*25*50cm 11500
30*30*60cm 13800

NO:KL-039

20*20*40cm 8740
25*25*50cm 11960
30*30*60cm 15640



NO:KL-041

20*20*40cm 8050
25*25*50cm 11500
30*30*60cm 13800



NO:KL-040

60*15*10cm 6785
80*18*10cm 8740
100*20*10cm 11040

NO:KL-042

60*15*10cm 6785
80*18*10cm 8740
100*20*10cm 11040

Steel used stainless + Scagliola + Light



NO:KL-056

40*20*350cm 80W
78200

NO:KL-057

25*25*400cm 80W
73600

NO:KL-055

40*20*350cm 80W
80500

Product description

- The lighting fixtures are made of steel and coated with polyester powder after sandblasting with pellets.
- The lamp housing is made of galvanized sheet or stainless steel, and the surface is coated with polyester powder, which has strong UV resistance.
- The lampshade is made of imitation marble.
- The fastening bolts and nuts are made of stainless steel.
- Protection level: IP55
- Electrical insulation grade: Class
- Applicable light source: LED
- Applicable places: buildings, corridors, pedestrian streets, villas, residential areas, and other places.




Steel used stainless + Scagliola + Light





Product description
BO-0426-6W-A

- Power: 6W **2875**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum + profile aluminum
- Lamp body color: Sand black/Sand gray
- Protection level: IP65



Product description
BO-0426-10W-A

- Power: 10W **8395**
- Voltage: AC100-256V
- Lamp body material: 304 stainless steel
- Lamp body color: Electroplating brushed champagne gold
- Protection level: IP65



Product description
BO-0426-7W-A

- Power: 7W **1955**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum + profile aluminum
- Lamp body color: sand black/ sand gray
- Protection level: IP65




Product description
BO-0426-12W-C

- Power: 12W **3795**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ180 x H600 mm



Product description
BO-0426-12W-A

- Power: 12W **4485**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: IP65



Product description
BO-0426-12W-B

- Power: 12W **2875**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ180 x H600 mm



Product description
BO-0426-10W-B

- Power: 10W **3335**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: IP65



Product description
BO-0426-10W-C

- Power: 10W **2875**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W90 x L90 x H600 mm





Product description

BO-0426-E27-120-A

BO-0426-E27-140-A

Φ120 * 800mm 5450
Φ140 * 800mm 6095

- Power: E27
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black
- Protection level: Ip65



Product description

BO-0426-10W-E

- Power: 10W 3795
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ100 x H700 mm



Product description

BO-0426-7W-B

- Power: 7W 3565
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black /sand ash
- Protection level: Ip65
- Φ105 x H500 mm



Product description

BO-0426-5W-A



- Power: 5W 5175
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ200 x H500 mm



Product description

BO-0426-10W-D

- Power: 10W 3335
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black /sand ash
- Protection level: IP65

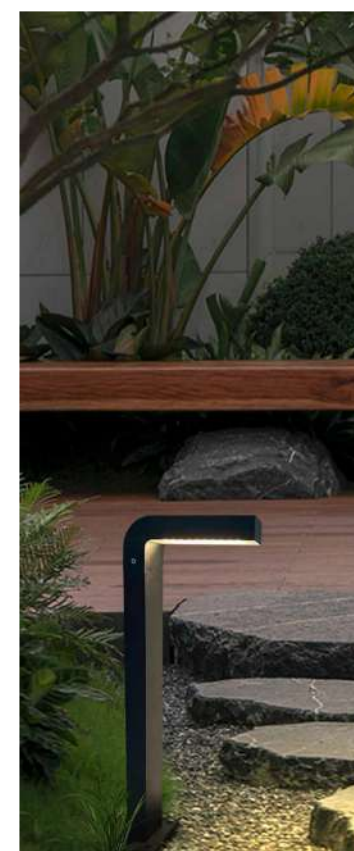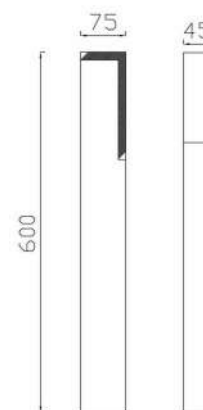

Product description

BO-0426-7W-C

- Power: 7W 3795
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black /sand ash
- Protection level: Ip65
- W90 x L200 x H600 mm



Product description

BO-0426-15W-A

- Power: 15W 7475
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W150x L200 x H700 mm.





Product description
BO-0426-7W-D

- Power: 7W **3335**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W120 x W120 x H800 mm



Product description
BO-0426-7W-E

- Power: 7W **2185**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: IP65



Product description
BO-0426-10W-F

- Power: 10W **3795**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ120 x H600 mm



Product description
BO-0426-1.5W-A

- Power: 1.5W **3335**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: IP65





Product description
BO-0426-7W-F

- Power: 7W **3795**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W78 x L103 x H600 mm



Product description
BO-0426-7W-G

- Power: 7W **3565**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: IP65




Product description
BO-0426-7W-H-SR

- Power: 7W **2875**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black /sand ash
- Protection level: Ip65
- W120 x L120 x H600 mm



Solar power **3105**

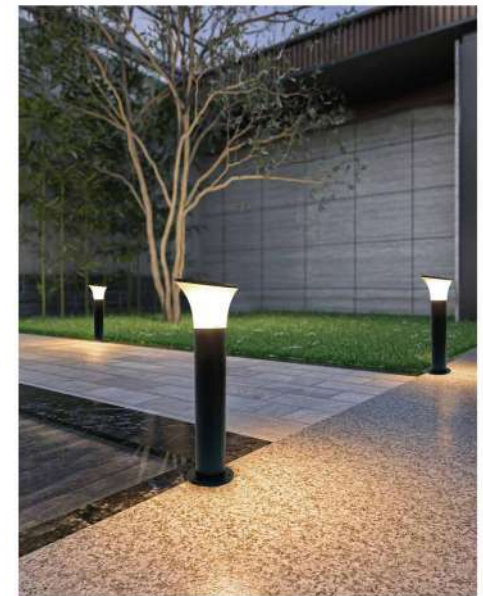

Product description
BO-0426-7W-J

- Power: 7W **3335**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ120 x H600 mm





Product description BO-0426-20W-A

- Power: 20W **3565**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand gray
- Protection level: Ip65




Product description BO-0426-7W-K

- Power: 7W **3795**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black /sand ash
- Protection level: IP65



Product description BO-0426-1.5W-B

- Power: 1.5W+ **4255**
- Voltage: 3.7V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: IP65

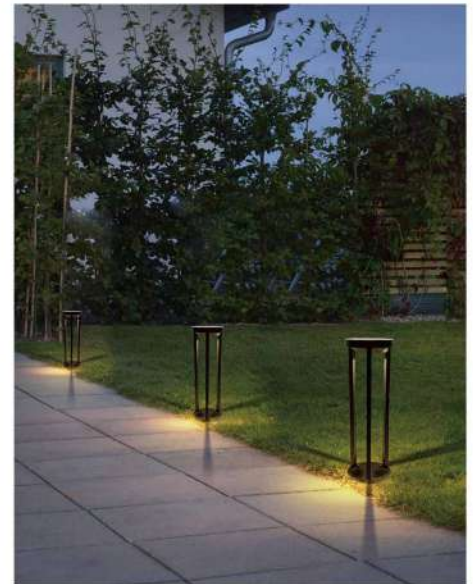

Product description BO-0426-1.5W-C

- Power: 1.5W+ **4140**
- Voltage: 3.7V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ160 x H800 mm



Product description BO-0426-7W-L

- Power: 7W **3795**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ120 x H600 mm



Product description BO-0426-7W-M

- Power: 7W **4025**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black /sand ash
- Protection level: Ip65
- W100 x L100 x H600 mm



Product description BO-0426-7W-N

- Power: 7W **2645**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: IP65



Product description BO-0426-7W-P

- Power: 7W **1725**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ90 x H480 mm





Product description BO-0426-7W-Q

- Power: 7W **3105**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: IP65




Product description BO-0426-12W-D

- Power: 12W **2875**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand gray
- Protection level: IP65



Product description BO-0426-7W-R

- Power: 7W **3335**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W120 x L160 x H700 mm



Product description BO-0426-7W-S

- Power: 7W **3335**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W90 x L90 x H600 mm



Product description BO-0426-1.5W-F

- Power: 1.5W+ **4945**
- Voltage: 3.7V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ230 x H550 mm



Product description BO-0426-6W-B

- Power: 6W+5W **4485**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black /sand ash
- Protection level: Ip65
- W90 x L90 x H700 mm



Product description BO-0426-1.5W-D

- Power: 1.5W+ **3335**
- Voltage: 3.7V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W100 x L100 x H600 mm



Product description BO-0426-7W-T

- Power: 7W **4255**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ90 x H600 mm






Product description
BO-0426-7W-U

- Power: 7W **3335**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ260 x H600 mm



Product description
BO-0426-7W-V

- Power: 7W **4485**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W110 x L130 x H600 mm

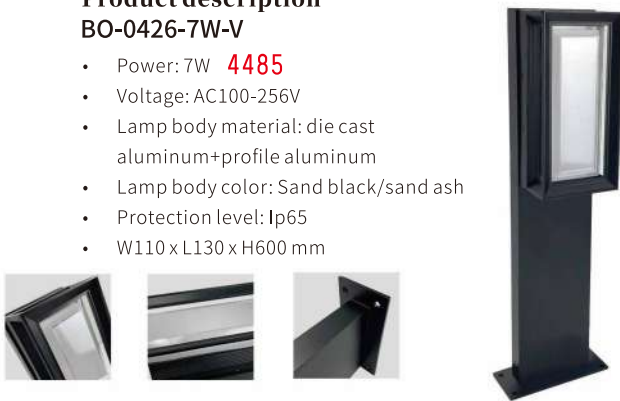

Product description
BO-0426-10W-G

- Power: 10W **5175**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ160 x H600 mm




Product description
BO-0426-7W-X

- Power: 7W **2185**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand gray
- Protection level: Ip65
- Φ90 x H600 mm



Product description
BO-0426-E27-B

- Power: E27 **5175**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ200 x H600 mm

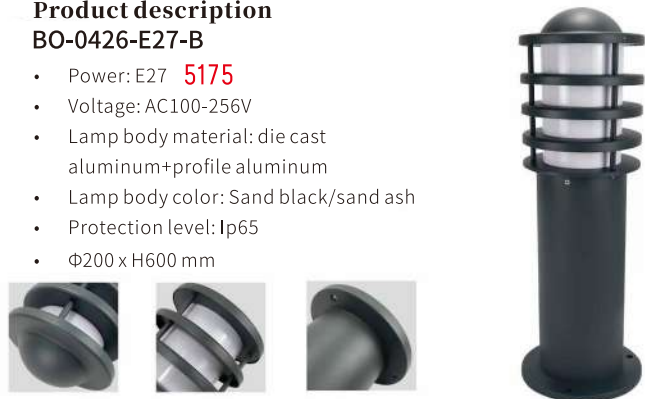

Product description
BO-0426-7W-W

- Power: 7W **1955**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ90 x H600 mm



Product description
BO-0426-E27-C

- Power: E27 **3565**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand gray
- Protection level: IP65



Product description
BO-0426-10W-H

- Power: 10W **3565**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ150x H600 mm



Product description
BO-0426-7W-Y

- Power: 7W **3335**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black /sand ash
- Protection level: Ip65
- W44 x L110 x H700 mm



Product description
BO-0426-12W-E

- Power: 12W **2875**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black /sand ash
- Protection level: Ip65
- W50 x L50 x H600 mm



Product description
BO-0426-7W-AA

- Power: 7W **3795**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W40 x L120 x H600 mm



Product description
BO-0426-7W-AB

- Power: 7W **2645**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W44 x L100 x H700 mm



Product description
BO-0426-10W-J

- Power: 10W **2875**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W120 x L120 x H600 mm



Product description
BO-0426-7W-Z

- Power: 7W **2875**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W100 x L120 x H600 mm



Product description
BO-0426-7W-AC

- Power: 7W **2185**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ100x H600 mm



Product description
BO-0426-7W-AD

- Power: 7W **2070**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W106 x L106 x H600 mm





Product description BO-0426-7W-AE

- Power: 7W **6555**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ120x H670 mm



Product description BO-0426-1.5W-E

- Power: 1.5W+ **3335**
- Voltage: 3.7VA
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ260x H600 mm



Product description BO-0426-10W-K

- Power: 10W **3015**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ150x H600 mm



Product description BO-0426-10W-L

- Power: 10W **3335**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- W55 x L155 x H500 mm



Product description BO-0426-7W-AF

- Power: 7W **3335**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black/sand ash
- Protection level: Ip65
- Φ110x H690 mm




Product description BO-0426-E27-D

- Power: E27 **6095**
- Voltage: AC100-256V
- Lamp body material: die cast aluminum+profile aluminum
- Lamp body color: Sand black /sand ash
- Protection level: Ip65
- Φ200x H800 mm



NO:4801 15W 4255



Product description

- Protection index: Ip65
- Light source: 15W LED
- Power supply parameter: 220V±10V/50Hz-60Hz
- Characteristics of lamps: die-aluminum alloy body

NO:4802 15W 5175





NO:5001 7W 2875

Product description

- Protection index: IP65
- Light source: 10W LED
- Power supply parameter: 220V±10V/50Hz-60Hz
- Characteristics of lamps: die-aluminum alloy body



NO:5002 7W 3105

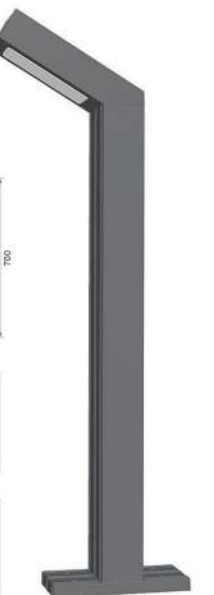

N0:0301 E27 6095

Product description

- Lightsource:LED
- Material:Lamp body is made of high quality aluminum ,beautiful and durable
- The surface is coated with outdoor power,smooth,acid andalkali resistant,Aging resistant
- Protecting grade:IP55
- Applications:Lawn,plaza, park, blocks,etc

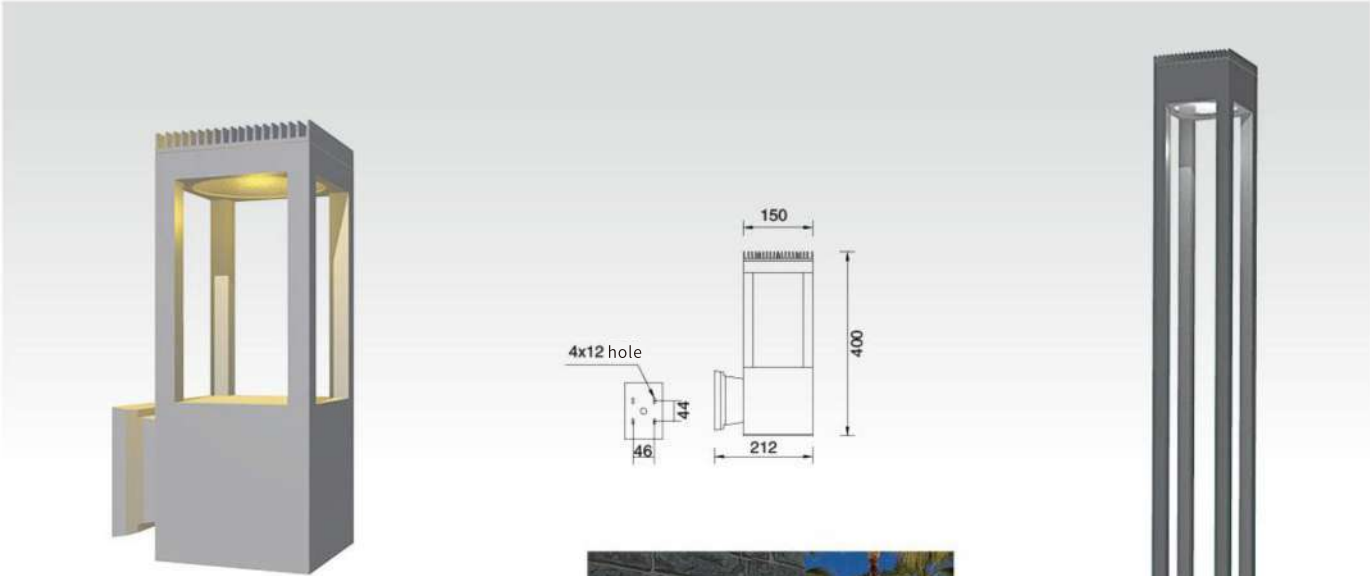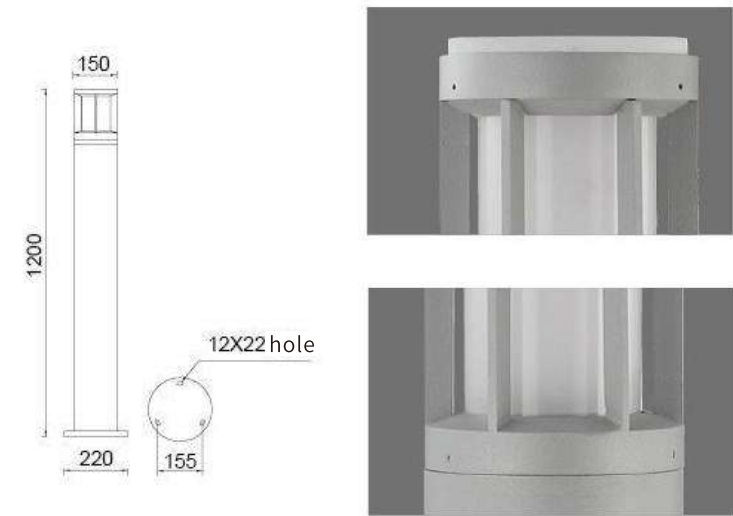

N0:5901
10W LED
5980



Product description

- Protection index:IP65
- Light source:LED
- Power supply parameter:220V±10V/50Hz-60Hz
- Characteristics of lamps:die-aluminum alloy body




N0:1601 9660
Product description





- Lightsource:T5
- Material:Lamp body is made of high quality aluminum ,beautiful and durable
- The surface is coated with outdoor power,smooth,acid andalkali resistant,Aging resistant
- Protecting grade:IP55
- Applications:Lawn,plaza, park, blocks,etc

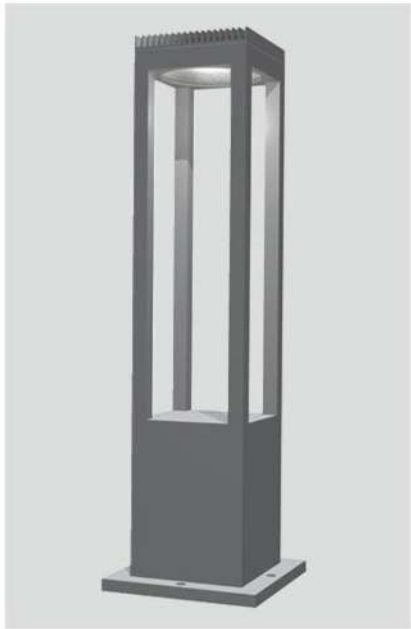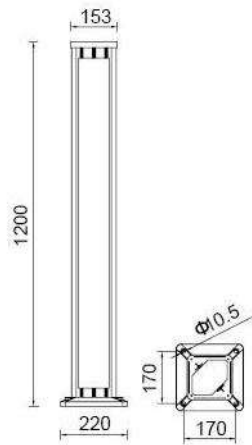

N0:5902
10W LED
5980

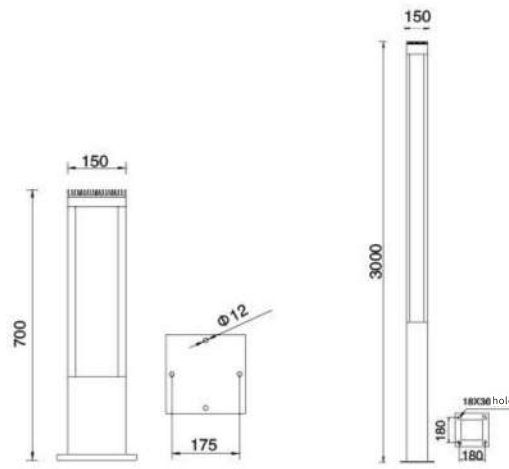

N0:5903
30W LED
19550

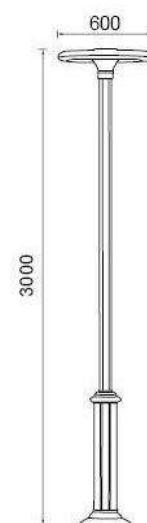

NO:7801

28750



Product description

- Protection index:IP65
- Light source:40-80W LED
- Power supply parameter:220V±10V/50Hz-60Hz
- Characteristics of lamps:die-aluminum alloy body




NO:6101

4485




Product description

- Protection index:IP65
- Light source:12W LED
- Power supply parameter:220V±10V/50Hz-60Hz
- Characteristics of lamps:die-aluminum alloy body

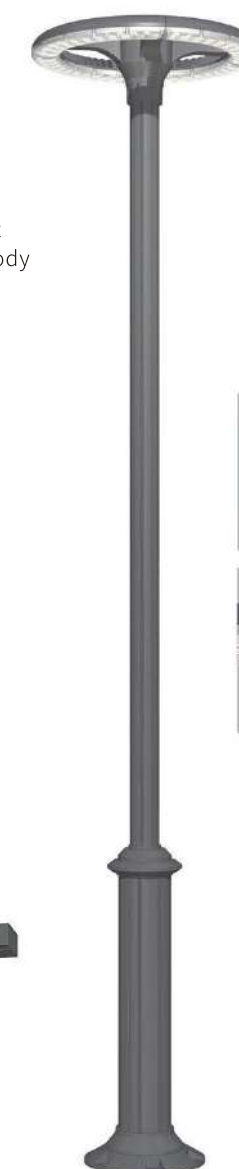

NO:6102

28750

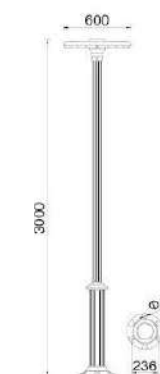


NO:6801

28750


Product description

- Protection index:IP65
- Light source:30W*2
- Power supply parameter:220V±10V/50Hz-60Hz
- Characteristics of lamps:die-aluminum alloy body

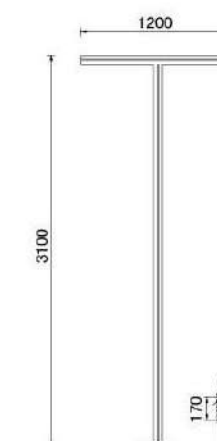


NO:7301
50W 24150
Product description

- Protection index:IP65
- Light source:10W LED
- Power supply parameter:220V±10V/50Hz-60HZ
- Characteristics of lamps:die-aluminum alloy body

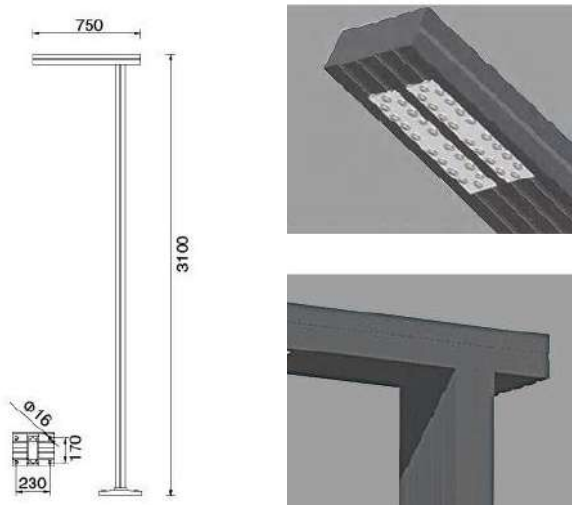


NO:7501 30W 16100
Product description

- Protection index:IP65
- Light source:30W LED
- Power supply parameter:220V±10V/50Hz-60HZ
- Characteristics of lamps:die-aluminum alloy body

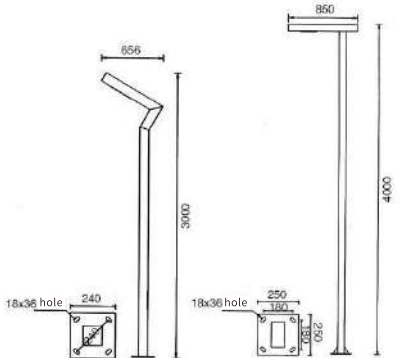


NO:7502
50W 24150

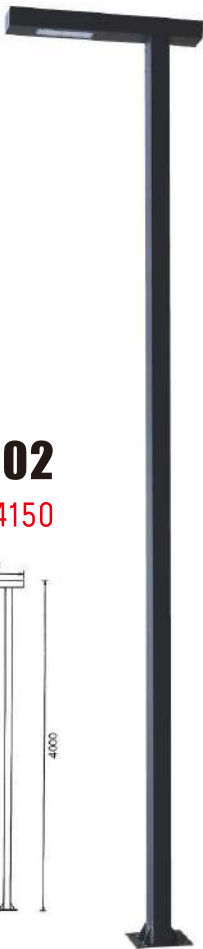


NO:7601 40W 22540
Product description

- Protection index:IP65
- Light source:20-40W LED
- Power supply parameter:220V±10V/50Hz-60HZ
- Characteristics of lamps:die-aluminum alloy body

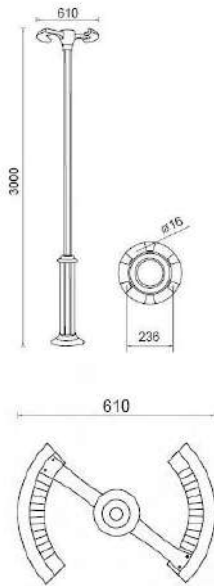

Product description

- Protection index:IP55
- Light source:40-80W LED
- Power supply parameter:220V±10V/50Hz-60HZ
- Characteristics of lamps:die-aluminum alloy body

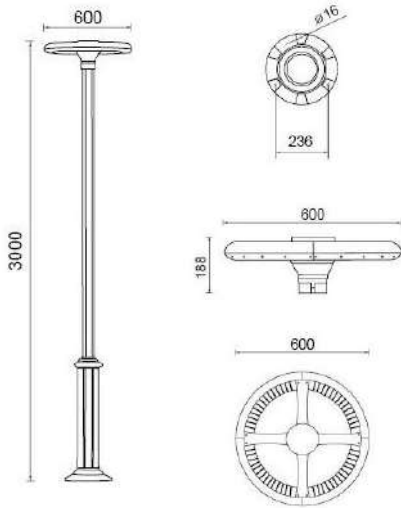

NO:7801 50W 28750




NO:7901
28750
Product description

- Protection index:IP65
- Light source:40-80W LED
- Power supply parameter:220V±10V/50Hz-60HZ
- Characteristics of lamps:die-aluminum alloy body



NO:8101
60950
Product description


- Protection index:IP65
- Light source:80-160W LED
- Power supply parameter:220V±10V/50Hz-60HZ
- Characteristics of lamps:die-aluminum alloy body

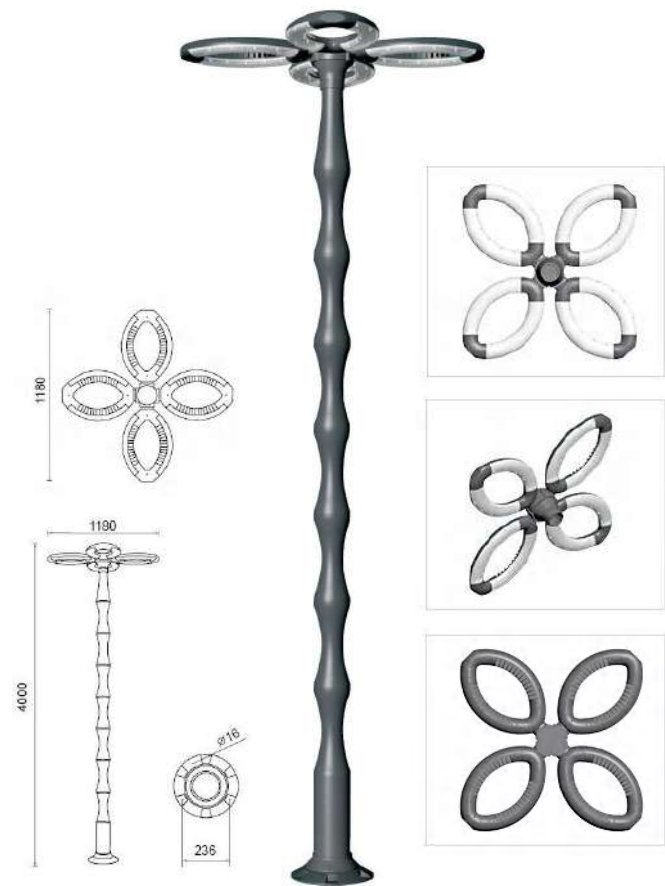

NO:9601



NO:9602

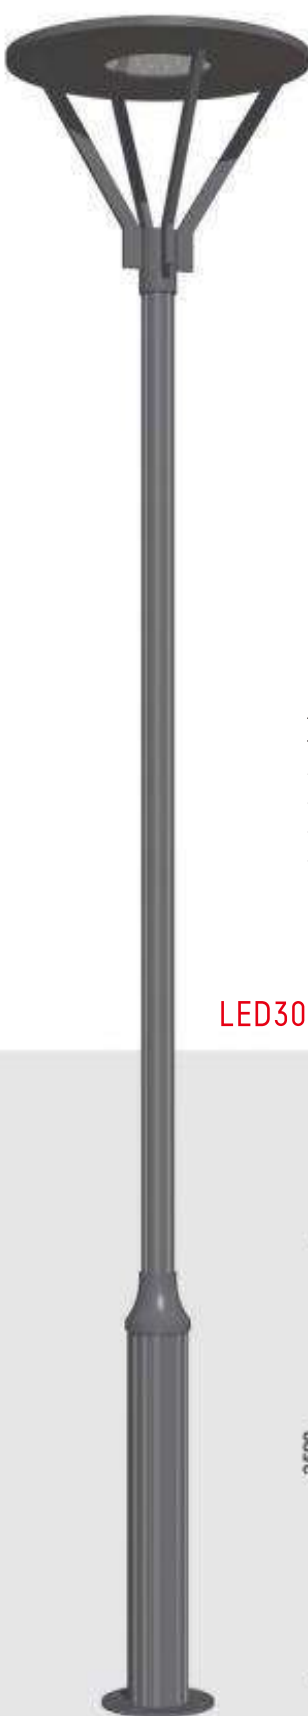


Product description

- Protection index:IP65
- Light source:LED
- Power supply parameter:220V±10V/50Hz-60HZ
- Characteristics of lamps:die-aluminum alloy body

E27 22540

LED30W 24150

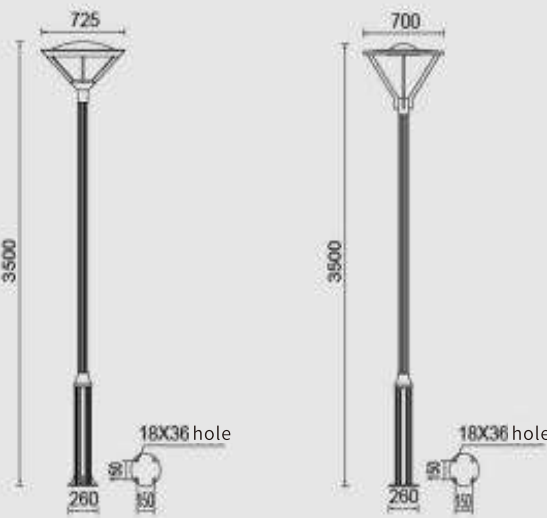

JHTY-9007

8740



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure
- Polycrystalline silicon/monocrystalline silicon solar panels
- 3.2V lithium iron phosphate battery

Product parameter

Model	JHTY-9007
Size	Φ520*410MM
Net Weight	5.7KG
Gross Weight	6.2KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM
Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	520*520*420MM

JHTY-9008

10350



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure
- Polycrystalline silicon/monocrystalline silicon solar panels
- 3.2V lithium iron phosphate battery

Product parameter

Model	JHTY-9008
Size	Φ470*580MM
Net Weight	5.3KG
Gross Weight	5.8KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM
Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	480*480*590MM

JHTY-9009

8280



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure
- Polycrystalline silicon/monocrystalline silicon solar panels
- 3.2V lithium iron phosphate battery

Product parameter

Model	JHTY-9009
Size	Φ470*320MM
Net Weight	4.76KG
Gross Weight	5.26KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM
Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	480*480*320MM

JHTY-9010

10465



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure
- Polycrystalline silicon/monocrystalline silicon solar panels
- 3.2V lithium iron phosphate battery

Product parameter

Model	JHTY-9010
Size	Φ500*500MM
Net Weight	7.8KG
Gross Weight	8.3KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM
Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	510*510*510MM

JHTY-9001A 30W 12650
60W 14490





Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure



Model	JHTY-9001A
Size	Φ540*420MM
Net Weight	8KG
Gross Weight	8.5KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	550*550*430MM



JHTY-9001B 16100





Polycrystalline silicon/
monocrystalline silicon solar
panels



LED: Philips, Osram high
brightness chips



PC transparent cover



Model	JHTY-9001B
Size	Φ540*420MM
Net Weight	8.5KG
Gross Weight	9KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM


Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	550*550*430MM

JHTY-9002A 10350




Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- Tempered glass
- Overall hermetic structure

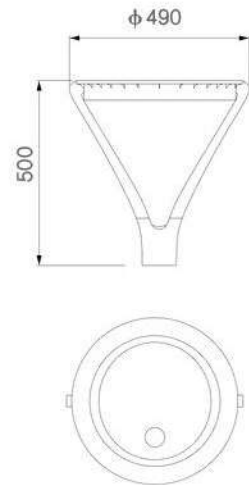

Model	JHTY-9002A
Size	Φ490*500MM
Net Weight	6.6KG
Gross Weight	7.1KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	Tempered glass
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	500*500*510MM



JHTY-9002B 13800




Polycrystalline silicon/
monocrystalline silicon solar
panels

Waterproof plug

PC transparent cover

3.2V lithium iron phosphate
battery

Product size



Model	JHTY-9002B
Size	Φ490*500MM
Net Weight	6.6KG
Gross Weight	7.1KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM


Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	500*500*510MM

JHTY-9004A 30W 9200




Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure



Model	JHTY-9004A
Size	420*420*400MM
Net Weight	4.95KG
Gross Weight	5.32KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	450*450*410MM



JHTY-9004B 9660





Polycrystalline silicon/
monocrystalline silicon solar
panels



Waterproof plug



3.2V lithium iron phosphate
battery

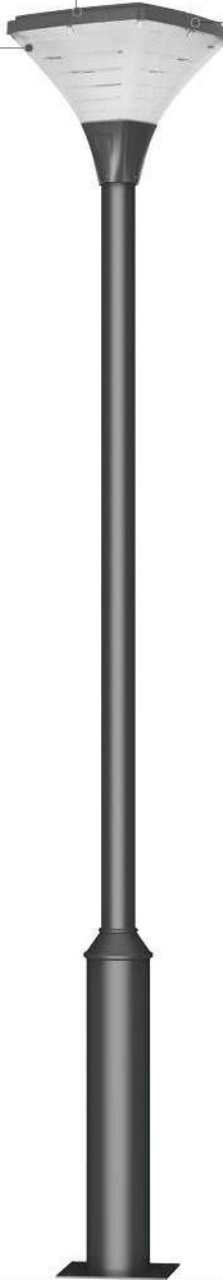

Model	JHTY-9004B
Size	420*420*380MM
Net Weight	4.72KG
Gross Weight	5.22KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM

Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	450*450*390MM

JHTY-9007

8740



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure
- Polycrystalline silicon/monocrystalline silicon solar panels
- 3.2V lithium iron phosphate battery

Product parameter

Model	JHTY-9007
Size	Φ520*410MM
Net Weight	5.7KG
Gross Weight	6.2KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM
Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	520*520*420MM

JHTY-9008

10350



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure
- Polycrystalline silicon/monocrystalline silicon solar panels
- 3.2V lithium iron phosphate battery

Product parameter

Model	JHTY-9008
Size	Φ470*580MM
Net Weight	5.3KG
Gross Weight	5.8KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM
Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	480*480*590MM

JHTY-9009

8280



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure
- Polycrystalline silicon/monocrystalline silicon solar panels
- 3.2V lithium iron phosphate battery

Product parameter

Model	JHTY-9009
Size	Φ470*320MM
Net Weight	4.76KG
Gross Weight	5.26KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM
Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	480*480*320MM

JHTY-9010

10465



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure
- Polycrystalline silicon/monocrystalline silicon solar panels
- 3.2V lithium iron phosphate battery

Product parameter

Model	JHTY-9010
Size	Φ500*500MM
Net Weight	7.8KG
Gross Weight	8.3KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Install Sleeve Diameter	60/76MM
Solar Panel Capacity	5V/20W
LED Light Source	2200LM
Battery Capacity	3.2V lithium iron phosphate battery
Lighting Time	Adjustable 6-12 hours
Control Method	Light control + time control
Frequency Range	3000-6000K
Packing Size	510*510*510MM

JHTY-9013

30W 14490
60W 15640



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- Tempered glass
- Overall hermetic structure

Product parameter

Model	JHTY-9013
Size	Φ500*580MM
Net Weight	5.6KG
Gross Weight	6.1KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	Tempered glass
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	510*510*590MM

JHTY-9014

30W 13800
60W 14950



Product rendering



Product description

- Secondary light distribution technology
- Tempered glass
- Overall hermetic structure

Product parameter

Model	JHTY-9014
Size	Φ550*590MM
Net Weight	6.2KG
Gross Weight	6.7KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	Tempered glass
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	560*560*600MM

JHTY-9015

30W 12650
60W 13340



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure

Product rendering



Product parameter

Model	JHTY-9015
Size	Φ500*504MM
Net Weight	7.87KG
Gross Weight	8.37KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	510*510*525MM

JHTY-9016

30W 13800
60W 14720



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure

Product rendering



Product parameter

Model	JHTY-9016
Size	Φ500*515MM
Net Weight	8.6KG
Gross Weight	9.1KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	510*510*525MM

JHTY-9035

40W 8740



- Product description
- Integral aluminum die-cast housing
 - Secondary light distribution technology
 - UV resistant PC lamp cover
 - Overall hermetic structure

Product rendering



Product parameter

Model	JHTY-9035
Size	Φ630*250MM
Net Weight	4.58KG
Gross Weight	5.1KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	640*350*260MM

JHTY-9036

30W 7590



- Product description
- Integral aluminum die-cast housing
 - Secondary light distribution technology
 - UV resistant PC lamp cover
 - Overall hermetic structure

Product rendering



Product parameter

Model	JHTY-9036
Size	Φ600*180MM
Net Weight	3.8KG
Gross Weight	4.3KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	610*610*190MM

JHTY-9021

30W 8510
60W 9660



Product rendering

Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure



Product parameter

Model	JHTY-9021
Size	Φ560*410MM
Net Weight	5.1KG
Gross Weight	5.6KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	570*570*420MM

JHTY-9022

30W 11960
60W 13340



Product rendering

Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure



Product parameter

Model	JHTY-9022
Size	Φ580*640MM
Net Weight	4.5KG
Gross Weight	5KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	590*590*650MM

JHTY-9023

30W 15640
60W 16790



Product rendering

Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure



Product parameter

Model	JHTY-9023
Size	Φ 500*980MM
Net Weight	8.5KG
Gross Weight	9KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	510*510*700MM

JHTY-9024

30W 8280



Product rendering

Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure



Product parameter

Model	JHTY-9024
Size	400*400*800MM
Net Weight	5KG
Gross Weight	5.5KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	410*410*810MM

JHTY-9027

30W 8740



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure

Product parameter

Model	JHTY-9027	
Size	Φ560*400MM/600*400MM	
Net Weight	4.46KG	
Gross Weight	4.96KG	
Lamp Material	High pressure die-cast aluminum lamp housing	
Lampshade Material	PC	
Rated Power	30W/ 60W	
Frequency Range	2700-6500K	
Input Voltage	AC85-265V	
Power Factor	PF> 0.9	
Color Rendering Index	> 70	
Working Temperature	-40°C -60°C	
LED Lifetime	>50000H	
Protection Grade	IP65	
Installation Spigot Dia	60/76mm	
Packing Size	MM	570*570*410MM/610*610*410MM

JHTY-9028

30W 9660



Product rendering



Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure

Product parameter

Model	JHTY-9028	
Size	Φ580*320MM	
Net Weight	4.2KG	
Gross Weight	4.7KG	
Lamp Material	High pressure die-cast aluminum lamp housing	
Lampshade Material	PC	
Rated Power	30W/ 60W	
Frequency Range	2700-6500K	
Input Voltage	AC85-265V	
Power Factor	PF> 0.9	
Color Rendering Index	> 70	
Working Temperature	-40°C -60°C	
LED Lifetime	>50000H	
Protection Grade	IP65	
Installation Spigot Dia	60mm	
Packing Size	590*590*330MM	

JHTY-9031

30W 12420
60W 13110



Product rendering

Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- Tempered glass
- Overall hermetic structure



Product parameter

Model	JHTY-9031
Size	Φ445*590MM
Net Weight	7.3KG
Gross Weight	7.8KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	Tempered glass
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	455*455*600MM

JHTY-9032

30W 7820
60W 8510



Product rendering

Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- Tempered glass
- Overall hermetic structure



Product parameter

Model	JHTY-9032
Size	Φ450*530MM
Net Weight	4.53KG
Gross Weight	5.03KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	Tempered glass
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	460*460*530MM

JHTY-9039

30W 8970
60W 10350



Product rendering

Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PC lamp cover
- Overall hermetic structure



Product parameter

Model	JHTY-9039
Size	Φ440*630MM
Net Weight	5.82KG
Gross Weight	6.32KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PC
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	450*450*640MM

JHTY-9040

30W 7935
60W 10350



Product rendering

Product description

- Integral aluminum die-cast housing
- Secondary light distribution technology
- UV resistant PMMA lamp cover
- Overall hermetic structure




Product parameter


Model	JHTY-9040
Size	Φ590*590MM
Net Weight	6.1KG
Gross Weight	6.6KG
Lamp Material	High pressure die-cast aluminum lamp housing
Lampshade Material	PMMA
Rated Power	30W/ 60W
Frequency Range	2700-6500K
Input Voltage	AC85-265V
Power Factor	PF> 0.9
Color Rendering Index	> 70
Working Temperature	-40°C -60°C
LED Lifetime	>50000H
Protection Grade	IP65
Installation Spigot Dia	60/76mm
Packing Size	550*550*550MM



NO:KL-96009
19550

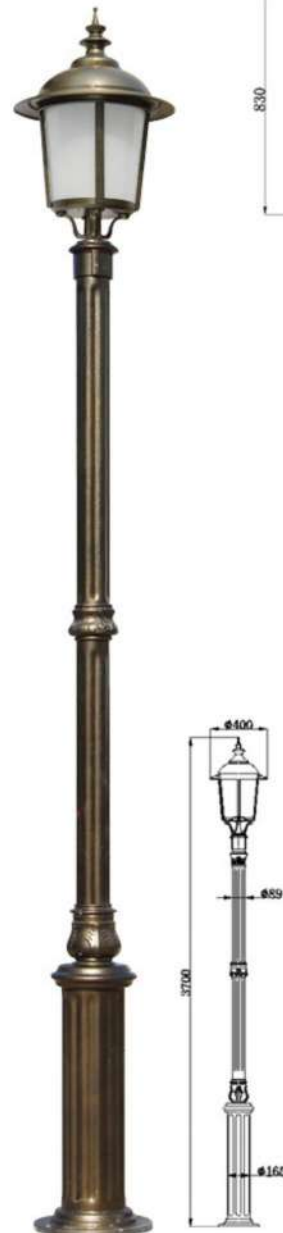

NO:KL-96010
19550



Materials

- Lamp holder is aluminum casting,after the projectile sandblasting treatment polyester powder coating.
- Light pole is steel parts,after galvanizing treatment,the surface of polyester powder coating,has a strong resistance to ultraviolet ray function.
- PC cover and steely glass cover.
- Bolt/nut is made of stainless steel(outside part)
- IP55.
- Electrical protection class I.

LAMP

- 70W-150WH01, 70W-150WSON, TC-TSE、LED.

Producing arts and crafts


- Spray anti-ultraviolet radiation outdoor power.
- Anti-Rotten/acid/alkali.
- Color:black(Bk),silver(sL),dark grey(GY)

Suitable location.

- Plaza,park,street,residential areas.



NO:KL-96011
20700



Materials

- Lamp holder is aluminum casting,after the projectile sandblasting treatment polyester powder coating.
- Light pole is steel parts,after galvanizing treatment,the surface of polyester powder coating,has a strong resistance to ultraviolet ray function.
- PC cover and steely glass cover.
- Bolt/nut is made of stainless steel(outside part)
- IP55.
- Electrical protection class I.

LAMP

- 70W-150WH01, 70W-150WSON, TC-TSE、LED.

Producing arts and crafts

- Spray anti-ultraviolet radiation outdoor power.
- Anti-Rotten/acid/alkali.
- Color:black(Bk),silver(sL),dark grey(GY)


Suitable location.

- Plaza,park,street,residential areas.




NO:KL-96061

44850

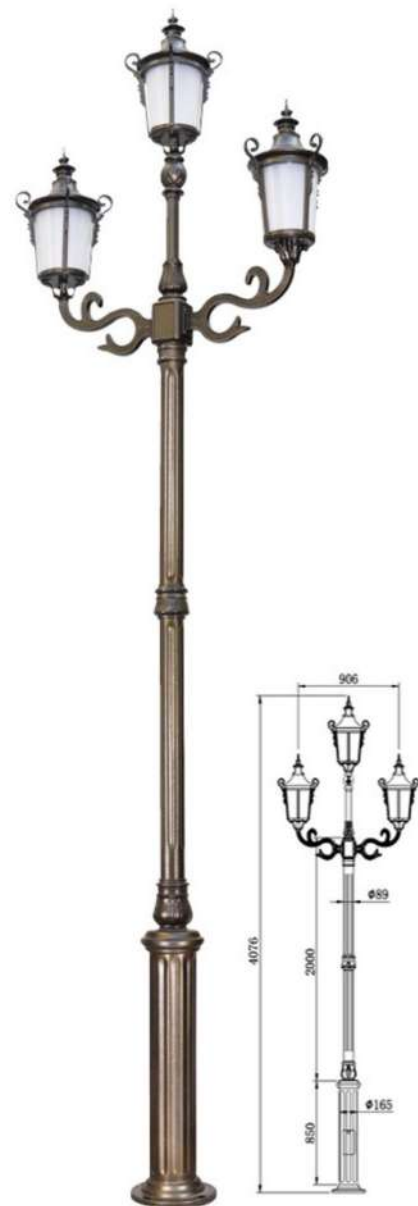

NO:KL-96062

44850

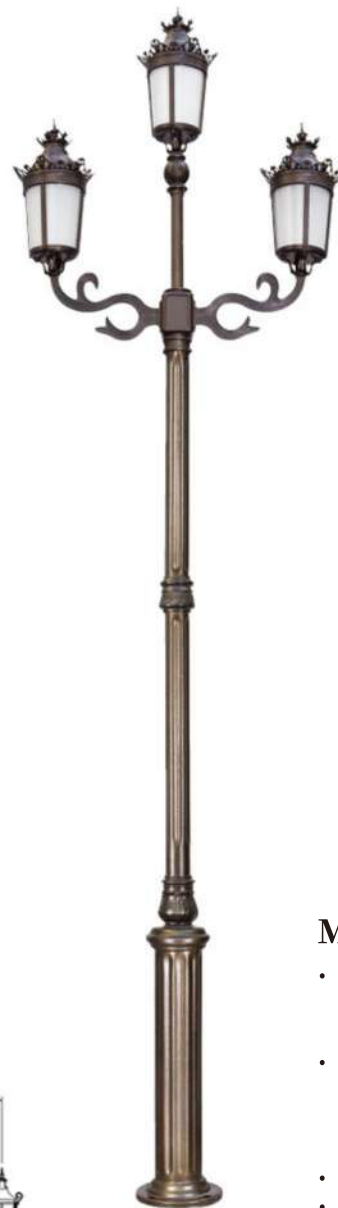

Materials

- Lamp holder is aluminum casting,after the projectile sandblasting treatment polyester powder coating.
- Light pole is steel parts,after galvanizing treatment,thesurface of polyester powder coating,has a strong resistanceto ultraviolet ray function.
- PC cover and steely glass cover.
- Bolt/nut is made of stainless steel(ouside part)
- IP55.
- Electrical protection class I.

LAMP

- 70W-150WH0I, 70W-150WSON, TC-TSE、LED.

Producing arts and crafts

- Spray anti-ultraviolet radiation outdoor power.
- Anti-Rotten/acid/alkali.
- Color :black(Bk),silver(sL).dark gley(GY)

Suitable location.

- Plaza,park,street,residential areas.



Materials

- Lamp holder is aluminum casting,after the projectile sandblasting treatment polyester powder coating.
- Light pole is steel parts,after galvanizing treatment,thesurface of polyester powder coating,has a strong resistanceto ultraviolet ray function.
- PC cover and steely glass cover.
- Bolt/nut is made of stainless steel(ouside part)
- IP55.
- Electrical protection class I.

LAMP

- 70W-150WH0I, 70W-150WSON, TC-TSE、LED.

Producing arts and crafts

- Spray anti-ultraviolet radiation outdoor power.
- Anti-Rotten/acid/alkali.
- Color :black(Bk),silver(sL).dark gley(GY)


Suitable location.

- Plaza,park,street,residential areas.




NO:KL-96063

47150

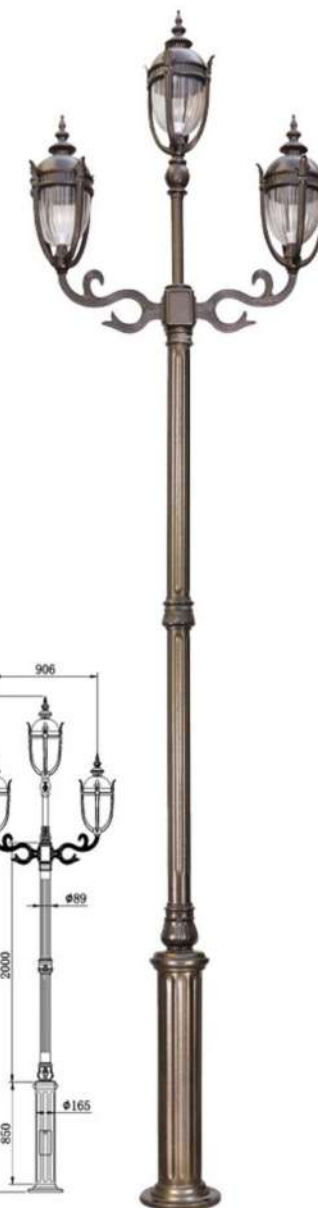


NO:KL-96064

44850

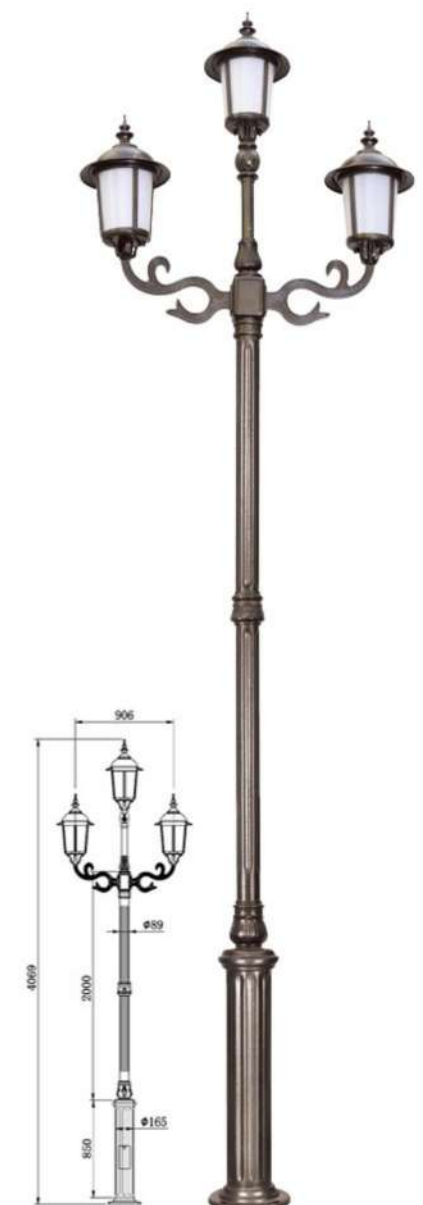



NO:KL-96087
57500

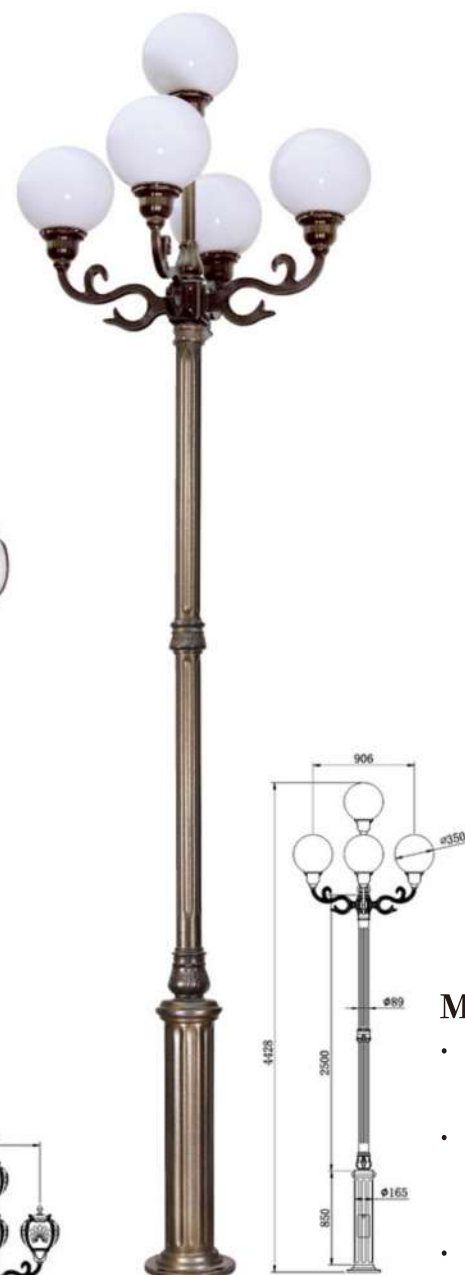

NO:KL-96088
44850

Materials

- Lamp holder is aluminum casting,after the projectile sandblasting treatment polyester powder coating.
- Light pole is steel parts,after galvanizing treatment,thesurface of polyester powder coating,has a strong resistanceto ultraviolet ray function.
- PC cover and steely glass cover.
- Bolt/nut is made of stainless steel(ouside part)
- IP55.
- Electrical protection class I.

LAMP

- 70W-150WH0I, 70W-150WSON, TC-TSE、LED.

Producing arts and crafts

- Spray anti-ultraviolet radiation outdoor power.
- Anti-Rotten/acid/alkali.
- Color:black(Bk),silver(sL).dark gley(GY)

Suitable location.


- Plaza,park,street,residential areas.



NO:KL-96089
47150



NO:KL-96090
73600

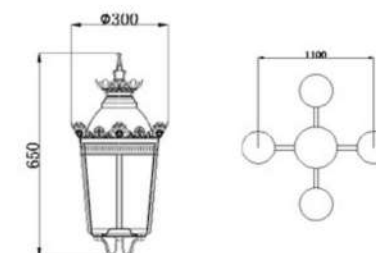

Materials

- Lamp holder is aluminum casting,after the projectile sandblasting treatment polyester powder coating.
- Light pole is steel parts,after galvanizing treatment,thesurface of polyester powder coating,has a strong resistanceto ultraviolet ray function.
- PC cover and steely glass cover.
- Bolt/nut is made of stainless steel(ouside part)
- IP55.
- Electrical protection class I.

LAMP

- 70W-150WH0I, 70W-150WSON, TC-TSE、LED.

Producing arts and crafts

- Spray anti-ultraviolet radiation outdoor power.
- Anti-Rotten/acid/alkali.
- Color:black(Bk),silver(sL).dark gley(GY)

Suitable location.

- Plaza,park,street,residential areas.






NO:KL-96001

110400



NO:KL-96002

33350



Materials

- Lamp holder is aluminum casting, after the projectile sandblasting treatment polyester powder coating.
- Light pole is steel parts, after galvanizing treatment, the surface of polyester powder coating, has a strong resistance to ultraviolet ray function.
- PC cover and steely glass cover.
- Bolt/nut is made of stainless steel (outside part)
- IP55.
- Electrical protection class I.

LAMP

- 70W-150WH01, 70W-150WSON, TC-TSE, LED.

Producing arts and crafts

- Spray anti-ultraviolet radiation outdoor power.
- Anti-Rotten/acid/alkali.
- Color: black(Bk), silver(sL), dark grey(GY)

Suitable location.

- Plaza, park, street, residential areas.



Galaxy A33 5G
28 มกราคม 2025 4:16 PM

Galaxy A33 5G
28 มกราคม 2025 4:15 PM



แกรนด์เดวิลส์ ศรีนครินทร์ 42
 คณาสิริ ชัยพฤกษ์วังแหวน
 คณาสิริ ไทรน้อย
 คณาสิริ บางนา
 คณาสิริ ปิ่นเกล้า-กาญจนา
 คณาสิริ พระราม2
 คณาสิริ ศาลายา
 คาซ่าพรีเมียม ราชพฤกษ์-แจ้งวัฒนะ
 คาซ่าพรีเมียม หทัยราษฎร์ (ซอย2)
 คาซ่าพรีเมียม อ่อนนุช
 คุณาภัทรพาร์ค
 ซีเซน พัฒนาการ 32
 ซิตีพาร์ค บางนา
 เดอะแกรนด์ พระราม2
 ทาวน์โอเวนิว สองแคว
 บริทาเนีย เรสซิเดนซ์ ศรีนครินทร์
 บ้านกลางเมือง บางป่าหุ
 บ้านกลางเมือง บางป่าหุ 2
 บ้านกลางเมือง พระราม9-กรุงเทพมหานคร
 บ้านกลางเมือง พระราม9-พัฒนาการ
 บ้านกลางเมือง ราชพฤกษ์-บางไผ่
 บ้านกลางเมือง รามอินทรา-วัชรพล

บ้านกลางเมืองวัชรพล
 บ้านกลางเมือง เสรีไทย 52
 บ้านกลางเมือง สุขสวัสดิ์ 39
 บ้านดิมอนเทอเรย์ ศรีราชาอัสสัมชัญ
 บ้านพิศาล ซอยบัวดี
 บ้านพิศาล วังแหวนประชาอุทิศ
 บ้านลุมพินีทาวน์วิลล์ ราชพฤกษ์-ปิ่นเกล้า
 บ้านลุมพินีทาวน์วิลล์ ลาดปลาตุก
 บ้านแสนสิริ พัฒนาการ 30
 บุราสิริ บางนา
 บุราสิริ ปัญญาอินทรา
 บุราสิริ พัฒนาการ
 บุราสิริ ราชพฤกษ์ 345
 บุราสิริ วังแหวนอ่อนนุช
 บุราสิริ วัชรพล
 บุราสิริ สายไหม
 เบสส์ทาวน์ หนามแดง
 เปี่ยมสุข วัดเตย
 พรราว พันท้าย
 พลัสโน คลองถนน
 พลัสโน บางแก้ว
 พลัสโน บางนา-อ่อนนุช

พลัสโน บางเลน
 พลัสโน บางใหญ่
 พลัสโน ประชาอุทิศ
 พลัสโน รัชดา-สวนกุหลาบ
 พลัสโน รัชสีดคลอง1
 พลัสโน รัตนานิเบศร์
 พลัสโน สวนผัก
 พลัสโน สุขสวัสดิ์70
 เพอร์เฟคพาร์ค รมเกล้า-สุวรรณภูมิ
 เพอร์เฟคเพลส กรุงเทพมหานครตัดใหม่
 เพอร์เฟคเพลส วังแหวนรามคำแหง
 เพอร์เฟคเพลส สุขุมวิท77-สุวรรณภูมิ
 มายกรีน บางพระ
 มายกรีน ปลวกแดง
 มายกรีน อมตะ
 มายกรีนวิลเลจ บางสมิคร
 มารวย ไสธรร
 มาสเตอร์พีช กรุงเทพมหานคร
 เมททาวน์ บางนา
 เมทโทร กรุงเทพมหานครตัดใหม่
 โมดิ บางนา
 โมดิ เพชรเกษม 81

โมดิ รัชสีดคลอง7
 วิสทาวน์ ท่าข้าม-พระราม2
 เศรษฐสิริ คลองทวีวัฒนา
 เศรษฐสิริ พหล-วัชรพล
 สัมมากรอเวนิว รามอินทรา-วังแหวน
 สันทวี วัดคลองมอญ
 สิริรามย์พลัส บางนา
 สิริเพลส กัลปพฤกษ์-สาทร
 สิริเพลส บางกวย-จตุรรม
 สิริเพลส บางพลู-รัตนานิเบศร์
 สิริเพลส รัชสีด
 สิริเพลส ราชพฤกษ์ 345
 สิริเพรส สุขสวัสดิ์-พระราม3
 สิริเพลส นวนคร
 อณาสิริ อโยธยา
 อะซี ประชาอุทิศ54
 อาบิเตียชยาด์ ท่าข้าม-พระราม2
 อาบิเตียบอนด์ ราชพฤกษ์
 อาบิเตียร์พาร์ค เทียนทะเล28
 อาบิเตียร์พาร์ค หทัยราษฎร์
 ASTERA PRIDE สุขสวัสดิ์
 PALAZZO ศรีนครินทร์53

PAVILLA บางบอน3
 THE CENTRO กาญจนาซอย4
 THE CENTRO คลองพระอุดม1
 THE CENTRO คลองพระอุดม3
 THE CENTRO บางแก้ว
 THE CENTRO บางเลน
 THE CENTRO บางเลน2
 THE CENTRO บางใหญ่
 THE CENTRO พหลรัชสีด
 THE CENTRO พัฒนาชนบท
 THE CENTRO พุทธบูชา
 THE CENTRO รัชสีดกรุงศรี
 THE CENTRO รามอินทรา109
 THE CENTRO วัชรพล
 THE CENTRO วัดพระเงิน
 THE CENTRO เวสเกต
 THE CENTRO สวนกุหลาบ
 THE CENTRO สวนผัก
 THE CENTRO สุขสวัสดิ์64
 THE CENTRO อ่อนนุชสุวรรณภูมิ
 THE CITY คลองถนน
 THE CITY เจ้าพระยา

THE CITY นวมินทร์53
 THE CITY บรมราชชนนี60
 THE CITY บางแก้ว
 THE CITY พัฒนาการตัดใหม่
 THE CITY รัชดาว่างศ์ว่าง
 THE CITY รัตนานิเบศร์-บางใหญ่
 THE CITY ราชพฤกษ์
 THE CITY ราชพฤกษ์-สวนผัก
 THE CITY สายไหม
 THE CITY สุขสวัสดิ์39
 THE CUBE TOEN ล้าลูกกาคลอง3

GM-ST แกรนด์เมอรัสาทร
 GD-R2TS แกรนด์โอ พระราม 2 - ตากสิน
 TG-RPR5 เดอะเทรนด์รีเวอร์ฟรอนท์ราชพฤกษ์-พระราม 5
 GU-SV76 กูร์ไร่ สุขุมวิท 76
 GU-ST กูร์ไร่ สาทร
 โครงการ GD-KRTN แกรนด์โอ โคชาซ เทอร์มินอล
 โครงการ เดอะแกรนด์ราชพฤกษ์-พระราม 2
 โครงการ PRESTIGE-พระราม 2 (บ้านตัวอย่าง PT2-R2)
 โกลเด้น ทาวน์ 2 ปิ่นเกล้า-จรัญสินทวงศ์
 แจ้งวัฒนะ-เมืองทองฯ (ส่วนกลาง)
 แกรนด์โอ ฟิวเจอร์-รัชสีด
 เพรสทีจ 2 พระราม 2
 เดอะแกรนด์รีเวอร์ฟรอนท์ราชพฤกษ์-พระราม 5

แกรนด์บางกอก บูเลอวาร์ด อุทยาน
 แกรนด์บางกอก บูเลอวาร์ด ยาร์ดบางนา
 แกรนด์บางกอก บูเลอวาร์ด ดอนเมือง-แจ้งวัฒนะ
 แกรนด์บางกอก บูเลอวาร์ด บรมราชินี
 แกรนด์บางกอก บูเลอวาร์ด สุขสวัสดิ์-พระราม 3
 แกรนด์บางกอก บูเลอวาร์ด แจ้งวัฒนะ-ราชพฤกษ์
 แกรนด์บางกอก บูเลอวาร์ด กรุงเทพมหานคร
 แกรนด์บางกอก บูเลอวาร์ด รามอินทรา-เกษตรนวมินทร์

เดอะ เจนทริ สุขุมวิท-บางนา
 คอนนาเซอร์พัฒนาการ
 95E1 (ในนิต์ไฟว์ฮิสต์วัน)
 บางกอก บูเลอวาร์ด ชิกเนเจอร์บางแค
 บางกอก บูเลอวาร์ด ชิกเนเจอร์พระราม 2
 บางกอก บูเลอวาร์ด ชิกเนเจอร์ปิ่นเกล้า-บรมฯ
 บางกอก บูเลอวาร์ด ชิกเนเจอร์รามอินทรา-พระยาสุเรนทร์
 บางกอก บูเลอวาร์ด งามวงศ์วาน
 บางกอก บูเลอวาร์ด ติวานนท์-ดอนเมือง
 บางกอก บูเลอวาร์ด แจ้งวัฒนะ-ชัยพฤกษ์
 บางกอก บูเลอวาร์ด พระราม 2
 บางกอก บูเลอวาร์ด ภิภาวดี-พหลฯ
 บางกอก บูเลอวาร์ด บางนา-ศรีนครินทร์
 บางกอก บูเลอวาร์ด บางนา กม.5
 บางกอก บูเลอวาร์ด บรมฯ - สาย 4
 บางกอก บูเลอวาร์ด บางนา-กม.12

เวนิว ฟอรั่ม พระราม 5
 เวนิว ฟอรั่ม บางนา-ศรีวารี
 เวนิว พอร์เทรด ดอนเมือง-แจ้งวัฒนะ
 เวนิว พอร์เทรด เวสต์เกต
 เวนิว ไอดี ราชพฤกษ์-345
 เวนิว ไอดี ภิภาวดี-พหลฯ
 เวนิว ไอดี ปิ่นเกล้า-ศาลายา
 เวนิว ไอดี ปิ่นเกล้า-กาญจนาฯ
 เวนิว ไอดี รัชสีด-ปทุมธานี
 เวนิว ไอดี รามอินทรา-มีนบุรี
 เวนิว ไอดี มอเตอร์เวย์พระราม 9
 เวนิว ไอดี ราชพฤกษ์-345
 เพฟ กาญจนาฯ - ราชพฤกษ์
 เพฟ มอเตอร์เวย์-ฉะเชิงเทรา
 เพฟ รัชสีด-ภิภาวดี